

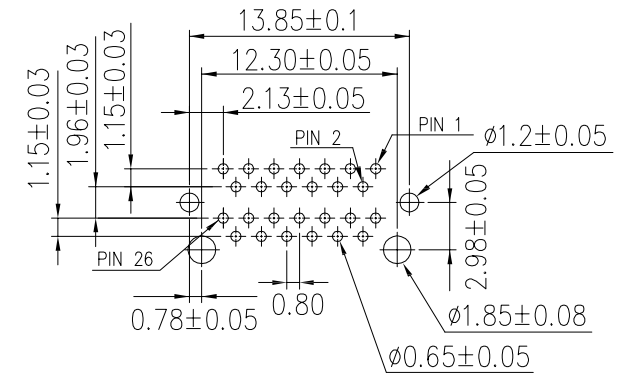
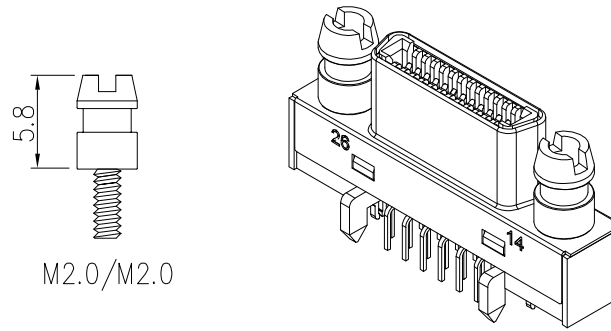


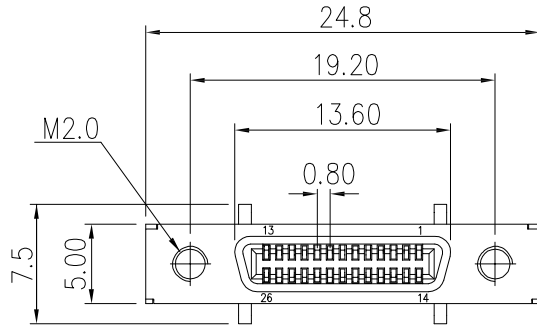

PCB Layout

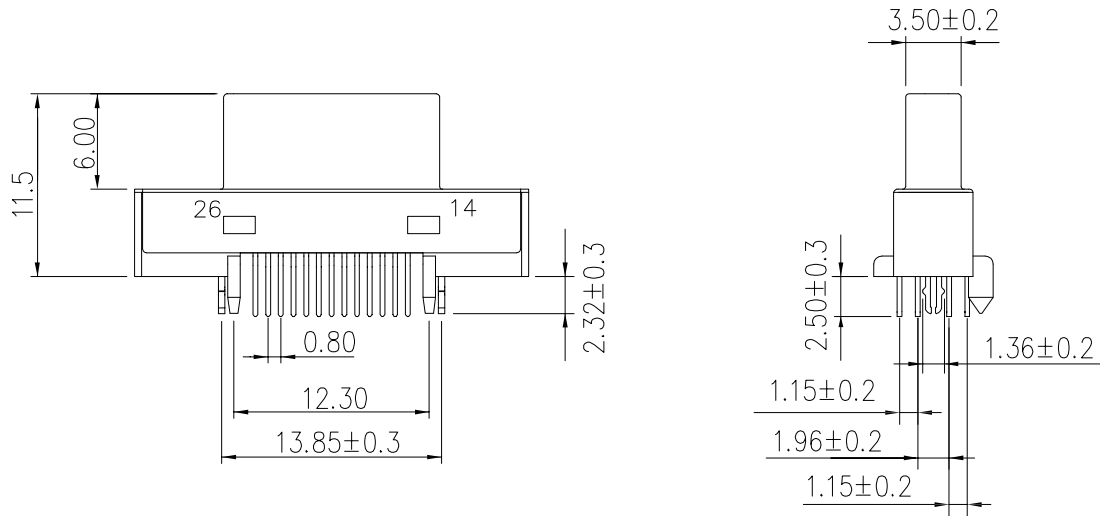

Contact current voltage: 125V
Contact current rating: 2 AMP
Contact resistance: 70mΩ/MAX
Dielectric withstanding voltage: 350V AC
Insulation resistance: >1000MΩ/Min
Temperature range: -45℃ to +105℃

6	Screws nut	Copper	Palting: Ni
5	Nut	Steel	Palting: Ni
4	Boardlock	Brass	Palting: Sn
3	Shell	Steel	Palting: Ni
2	Housing	PA9T UL94V-0	Color: black
1	Terminal	Phosphor copper	Contact area: Au 30u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remaks

△	2023/03/19	Terminal contact area plating changed from Au 5u" to 30u"	Jack Chen
△	2022/04/22	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		SDR pitch 0.8mm female 26pin vertical				PART NO.		B06-026811KA-01	
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
SCALE:	N:1	DATE:	2022/04/22	Huangmei	Jack Chen		B06-029		
 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770				