
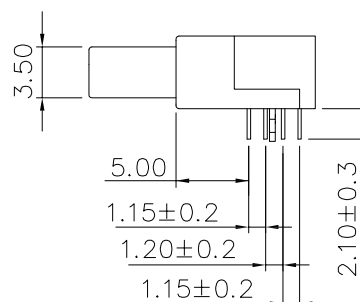
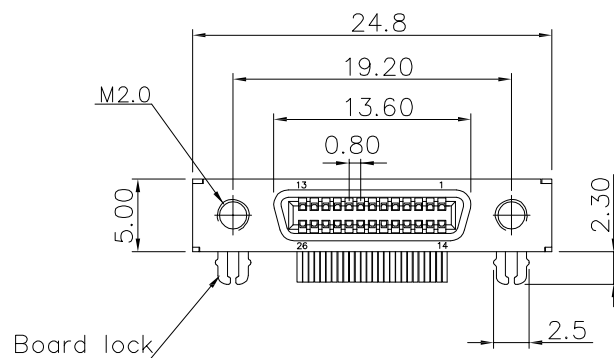
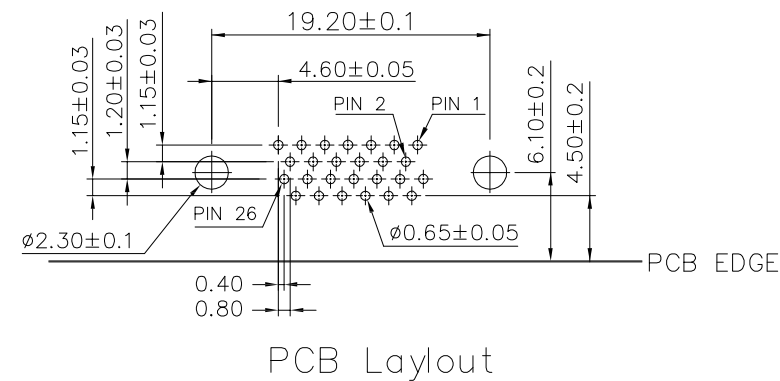




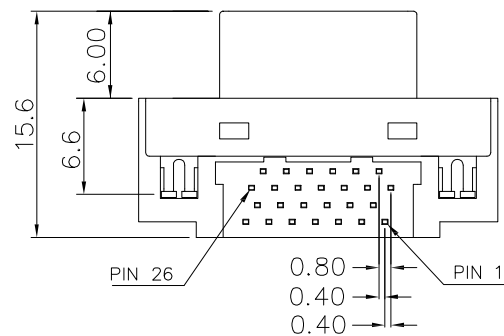

Contact Current Voltage: 125V AC
Current Rating: 2 Amp
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 350V AC
Contact Resistance: 70mΩ Max
Temperature Range: -45°C~+105°C

6	Nut	Copper alloy	Plating: Ni
5	Board lock	Copper alloy	Plating: Ui
4	Cover	PA 9T+33%GF	Color: black
3	Housing	PA 9T+33%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 30u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

A					QUALITY SYMBOLS	Tolerance		NAME:	SDR pitch 0.8mm female 26pin right angle			PART NO.	B06-026611KA-02		
					□: ☒:	x.	±0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
					CRITICAL MAJOR	.x	±0.40	SCALE:	N:1	DATE:	2022/11/21	Huangmei	Jack Chen		B06-030
					▽: ▽:	.xx	±0.25								
	SIDE	DATE	DESCRIPTION		APPROVER	ZERO DEFECT	S.P.C			lineconn 东莞市林诚塑胶电子有限公司			http://www.lineconn.com TEL:0769-85181660 85181770		
	8		7	6		5		4		3		2		1	