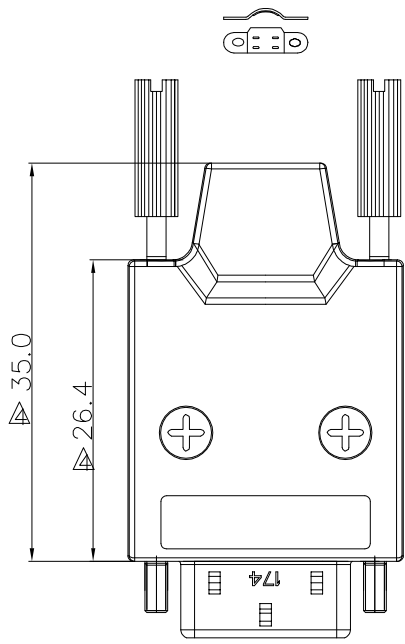
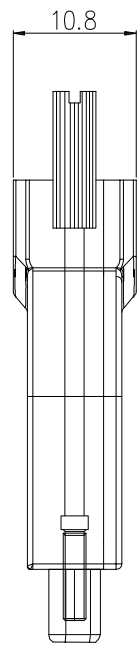
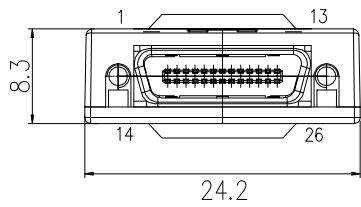
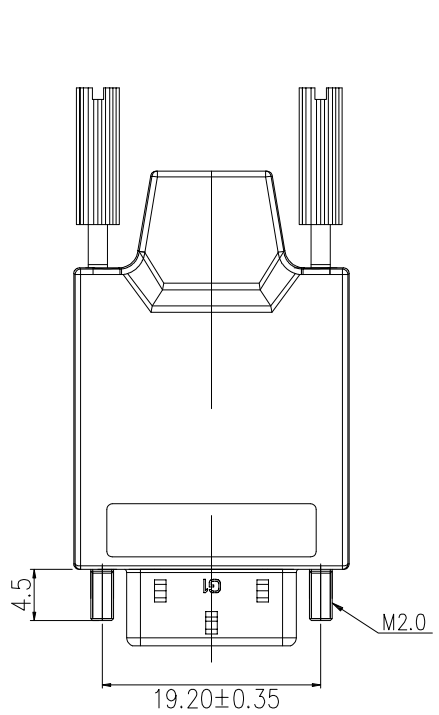



Voltage current rating: 2 AMP.
Dielectric withstanding voltage: 125V AC
Insulation resistance: 1000MΩ Min.
Contact resistance: 50MΩ/Max
Temperature range: -45℃ to +105℃

7	Cable clipper	SPCC	Plating: Ni
6	Hood	Zinc alloy	Plating: Ni
5	Screw	Steel	Plating: Ni
4	Cover	LCP+G.F.15% (UL 94V-0)	Color: black
3	Housing	LCP+G.F.15% (UL 94V-0)	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: 3u" Solder area: Sn Under-plating: Ni

A	△	2020/10/23	Added dimension marking	Jack Chen	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance x. ±0.80 .x ±0.50 .xx ±0.25  
	△	2020/08/11	Change of part no.	Jack Chen		
	△	2020/06/05	First edition release	Jack Chen		
	SIDE	DATE	DESCRIPTION	APPROVER		

NAME:		SDR 26P pitch 0.8mm male solder assembly type,zinc alloy hood			PART NO.		B06-026311CJ-A1	
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2020/06/05	Huangmei	Jack Chen		B06-023	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL: 0769-85181660 85181770			