
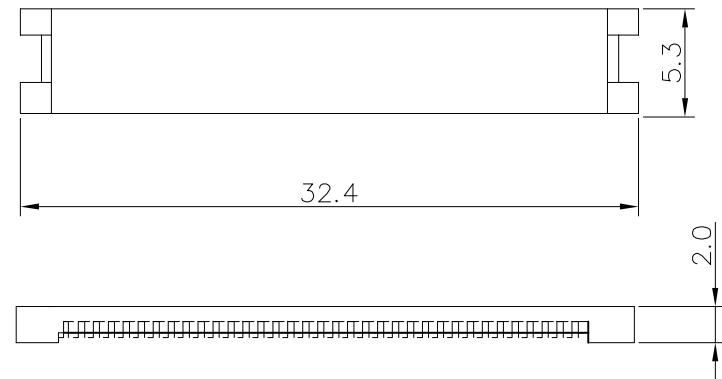
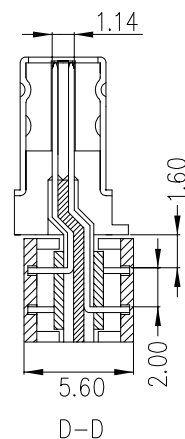
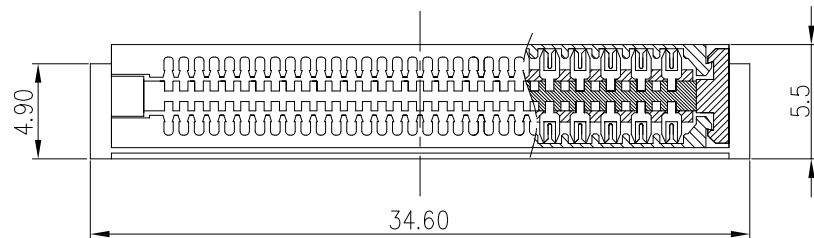
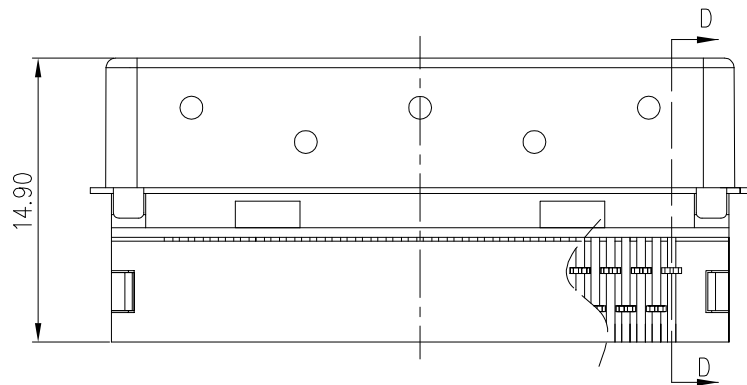


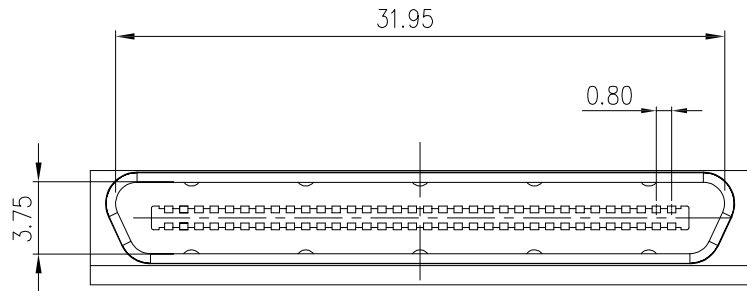


Voltage current rating: 2 AMP.
Dielectric withstanding voltage: 500V
Insulation resistance: 500MΩ Min.
Temperature range: -45℃ to +125℃

4	Shell	SPCC	Plated: Ni
3	Housing	PBT+30% UL 94-V0	Color: black
2	Cover	PBT+30% UL 94-V0	Color: black
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

△			
△	2021/08/27	Changed temperature range, changed part number	Shuo Cao
△	2017/04/06	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS
□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C







Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25




NAME:	VHDCI pitch 0.8mm 68pin male IDC connector			PART NO.	B06-068111A0-01		
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2017/04/06	Huangmei	Shuo Cao		B06-015

Lineconn 东莞市林诚塑胶电子有限公司



http://www.lineconn.com
TEL: 0769-85181660 85181770

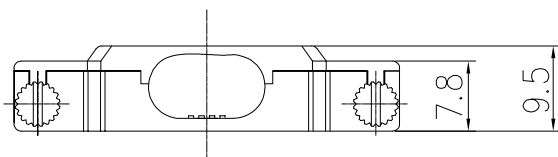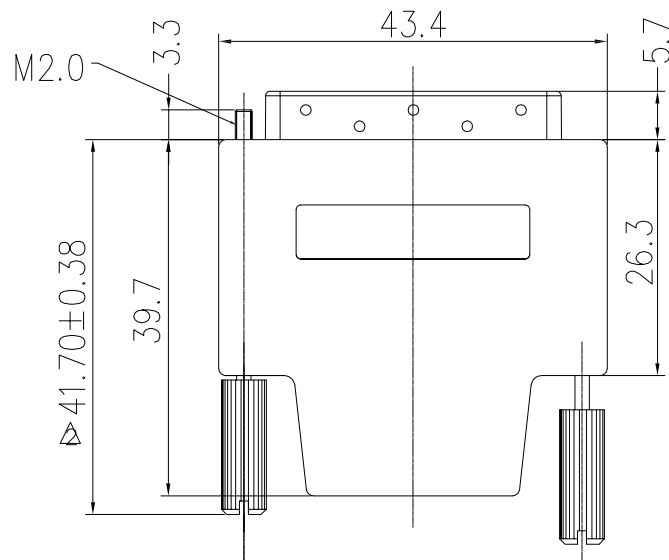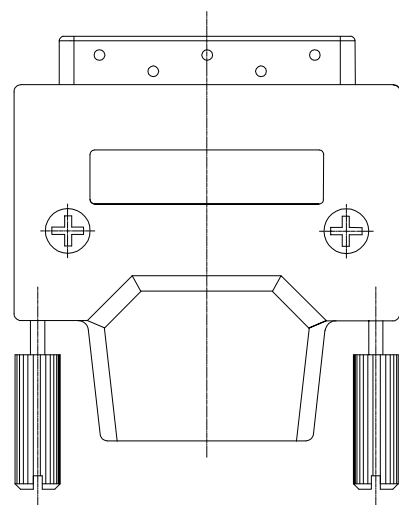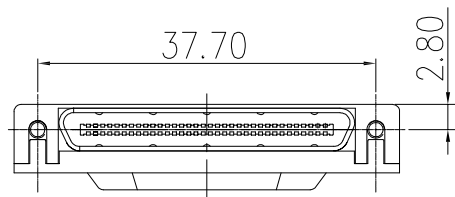

Hood screw



Cable clip



Cable clip screw

Current rating: 2 AMP.
Withstanding voltage: 500V
Insulation resistance: 500MΩ Min.
Temperature range: -45℃ to +125℃
Note: this part no.without connector

4	Cable clip	Steel	Plated: Ni
3	Nut	Steel	Plated: Ni
2	Screw	Steel	Plated: Ni
1	Hood	Zinc alloy	Plated: Ni
Item	Desc.	Material	Remarks

△	2021/08/27	Changed part number	Shuo Cao	QUALITY SYMBOLS	Tolerance	NAME:	VHDCl pitch 0.8mm male zinc alloy hood for IDC connector			PART NO.	B06-068111AA-01		
△	2017/06/19	Changed the size	King Zhou	□: □:	x. ±0.80	REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2017/04/06	First edition release	King Zhou	CRITICAL MAJOR	.x ±0.50	SCALE:	N:1	DATE:	2017/04/06	Huangmei	Shuo Cao		B06-016
				▽: S.P.C	.xx ±0.25								
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT									

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL: 0769-85181660 85181770