
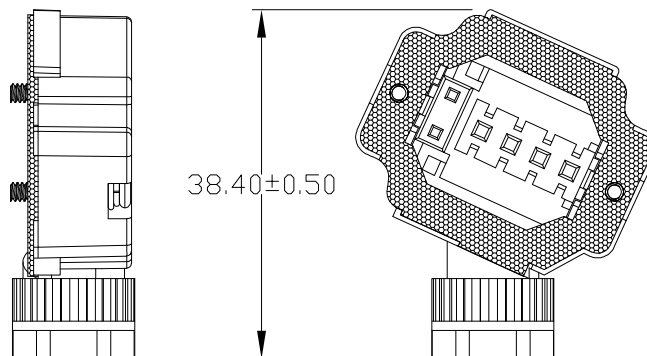
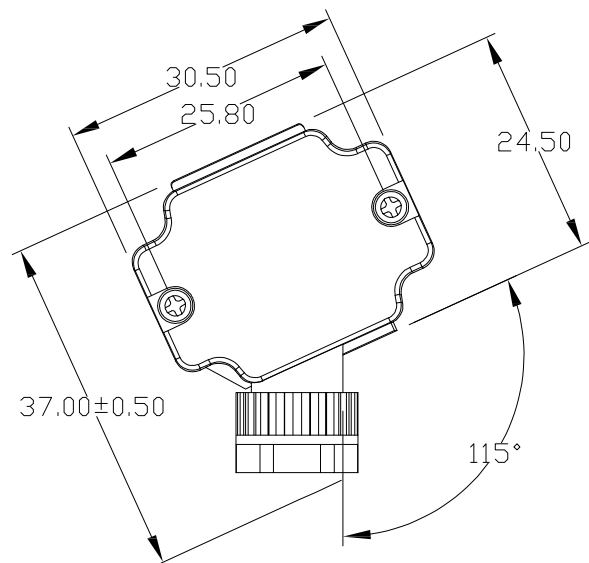


额定电流: 动力 7A Max。/刹车 5A Max
额定电压: 200VAC
绝缘耐电压: 1500VAC
绝缘抗阻: 1000M Ω Min. at 500VDC
工作温度: -20℃ to 105℃
防护等级: IP67

产品散件简示图

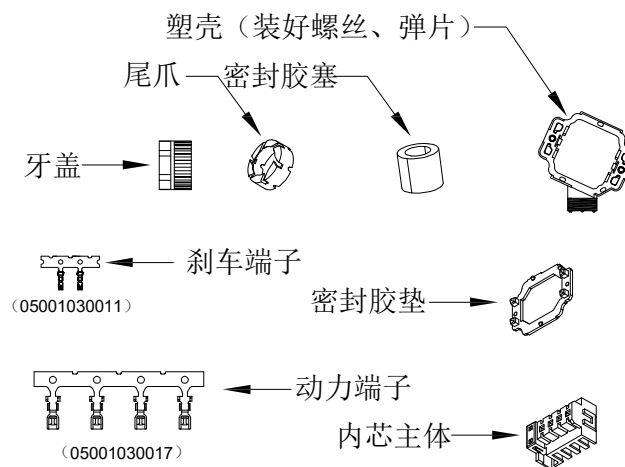

10	弹片	不锈钢SUS		2PCS
9	尾爪	PA66+30%GF	COLOR: BLACK	1PCS
8	螺丝	SPCC	COLOR: BLACK	2PCS
7	动力端子	磷青铜C519-H	PLATING: Au	4PCS
6	刹车端子	磷青铜C519-H	PLATING: Au	2PCS
5	密封胶垫	橡胶 TPPA	COLOR: BLACK	1PCS
4	密封胶垫	橡胶 TPPA	COLOR: BLACK	1PCS
3	内芯主体	PA66+30%GF UL94V-0	COLOR: BLACK	1PCS
2	牙盖	PA66+30%GF UL94V-0	COLOR: BLACK	1PCS
1	塑壳	PA66+30%GF UL94V-0	COLOR: BLACK	1PCS
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

				QUALITY SYMBOLS	Tolerance	NAME:	JN01-06P伺服动力+刹车线端插头				PART NO.	B01-JN01006P-01			
				: :	x. ±0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
	2022/03/07	新版发行		CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2022/03/07	Huangmei	Jack Chen		B01-059		
SIDE	DATE	DESCRIPTION	APPROVER	: : ZERO DEFECT S.P.C		lineconn 东莞市林诚塑胶电子有限公司								http://www.lineconn.com TEL:0769-85181660 85181770	