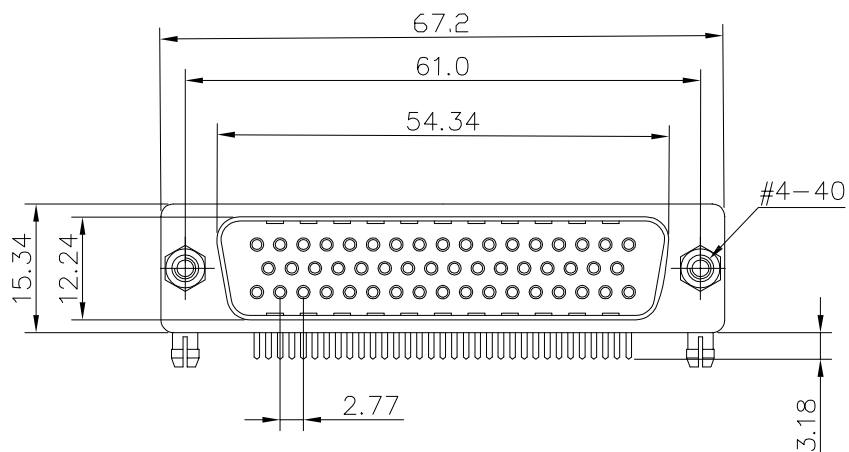


Current rating: 5 AMP.
Withstanding voltage: 1000V AC
Insulation resistance: 5000MΩ Min.
Temperature range: -45℃ to +125℃
ROHS compliant

Part No.:

B05-0505X1XD-02

Housing color:

1: Black



5: White

6: Blue

Terminal plating:

4: Ful gold 2u"

5: Ful gold 1u"

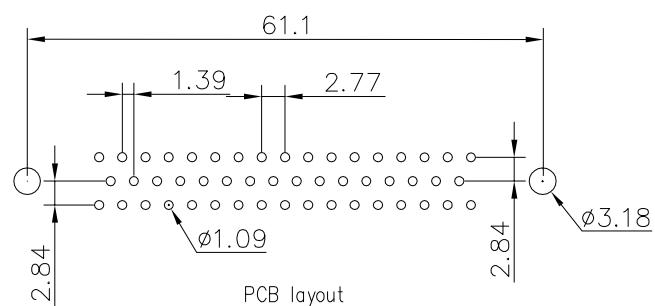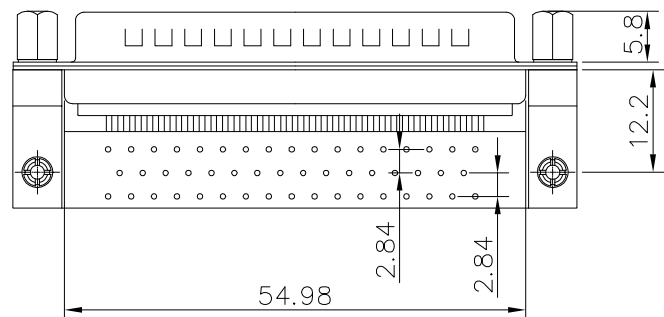

7	Riveted insert	Brass	Plating: Ni
6	Board lock	Brass	Plating: Sn
5	Nut	Steel	Plating: Ni
4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Brass	Terminal finish: see part no.
Item	Desc.	Material	Remarks

△	2014/01/09	Add screw height mark	King Zhou
△	2013/08/04	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS

□: ☒:

CRITICAL MAJOR

▽: ▽:


ZERO DEFECT S.P.C

Tolerance

.x. ±0.60

.x ±0.40

.xx ±0.25



NAME:

D-SUB machined pin 50pin male right angle, 10.4mm, riveted board lock, nut 5.8mm

REV:

B

SCALE:

N:1

UNIT:

mm

DATE:

2013/08/06

DRW BY

Jing Li

CHK BY

King Zhou

APP BY

DRAWING NO.

B05-013

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL: 0769-85181660 85181770