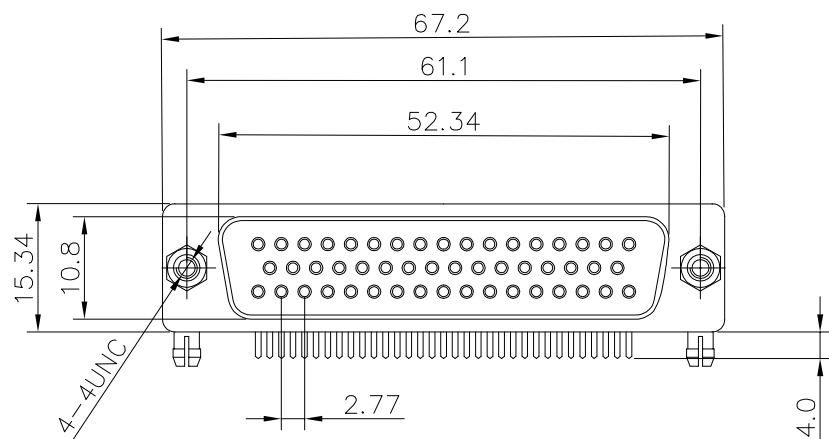


Current rating: 5 AMP.
Withstanding voltage: 1000V AC
Insulation resistance: 5000MΩ Min.
Temperature range: -45℃ to +125℃
ROHS compliant

Part No.:

B05-0506X1XD-02

Housing color:-

1: Black



5: White

6: Blue

Terminal plating:

4: Ful gold 2u"

5: Ful gold 1u"

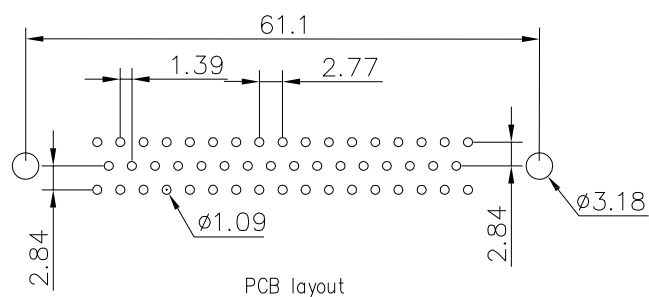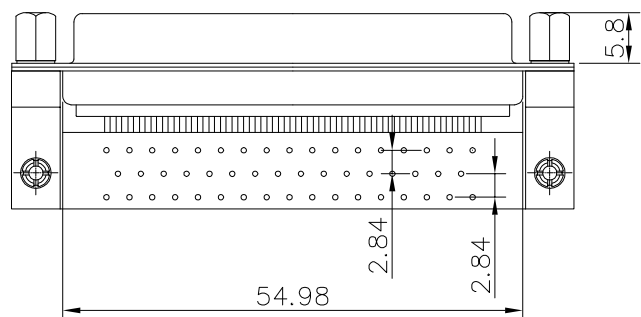

7	Riveted insert	Brass	Plating: Ni
6	Board lock	Brass	Plating: Sn
5	Nut	Steel	Plating: Ni
4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Brass	Terminal finish: see part no.
Item	Desc.	Material	Remarks

				QUALITY SYMBOLS	Tolerance	NAME:	D-SUB machined pin 50pin female right angle,10.4mm,riveted board lock,nut 5.8mm				PART NO.	B05-0506X1XD-02		
	2014/01/09	Add screw height mark	King Zhou	 :  :	x. ±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B05-023	
	2013/08/06	First edition release	King Zhou	CRITICAL MAJOR	.x ±0.40 .xx ±0.25	SCALE:	N:1	DATE:	2013/08/06	Jing Li	King Zhou			
SIDE	DATE	DESCRIPTION	APPROVER	 :  : ZERO DEFECT S.P.C	 	lineconn 东莞市林诚塑胶电子有限公司							http://www.lineconn.com TEL:0769-85181660 85181770	

Lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770