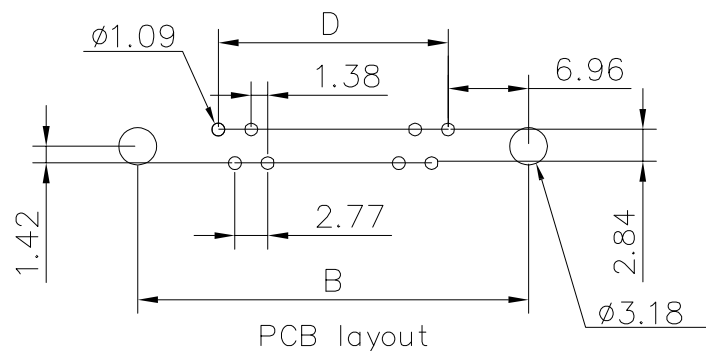
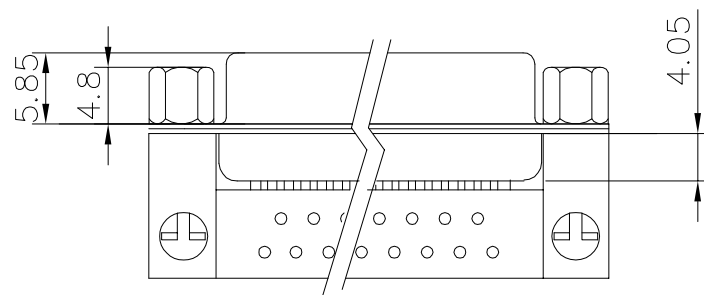
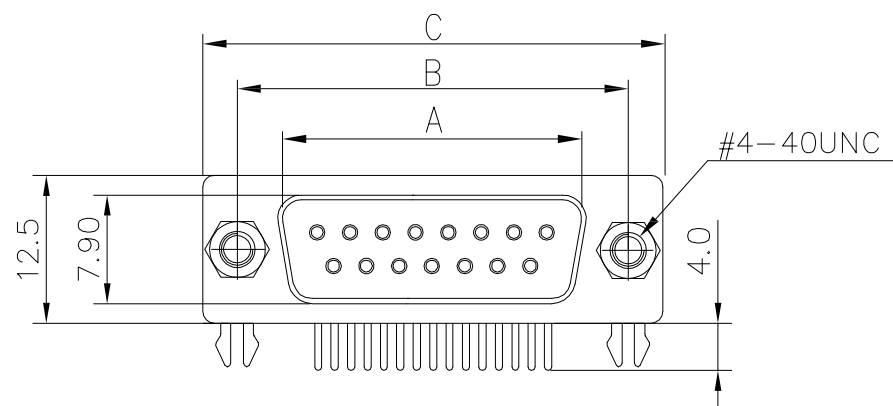


Pin No.	A	B	C $\pm$ 0.38	D
09	16.33	24.99	30.81	11.08
15	24.66	33.32	39.14	19.39
25	38.38	47.04	53.04	33.24
37	54.84	63.50	69.32	49.86

Current rating: 5 AMP.
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
A Temperature range: -55℃ to +105℃
Durability: 500 cycles
ROHS compliant

Part No.: B05-0XX6X1XD-02

No. of contact: _____

09: 9pos

15: 15pos

25: 25pos

37: 37pos

Housing color: _____

△ 1: Black

5: White

6: Blue

Terminal plating: _____

4: full Au 2u"

5: full Au 1u"

5	Screw	Steel	Palting: Ni
4	Board lock	Copper alloy	Palting: Sn
3	Housing	PBT+30%GF	Color: see part no.
2	Shell	SPCC	Palting: Ni
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remarks

△	2019/11/09	Adjustment tolerance	Huangmei	QUALITY SYMBOLS	Tolerance	NAME:	D-SUB machined pin female right angle, 7.2mm, riveted insert, lock screw				PART NO.	B05-0XX6X1XD-02	
△	2019/11/04	Modified operating temperature	Huangmei	□: ☒:	x. ±0.60	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2011/06/14	First edition release	Jing Li	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2011/06/14	Qiang Liao	Huangmei		B05-010
				▽: ▽:	.xx ±0.25	 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL: 0769-85181660 85181770							
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	 								