

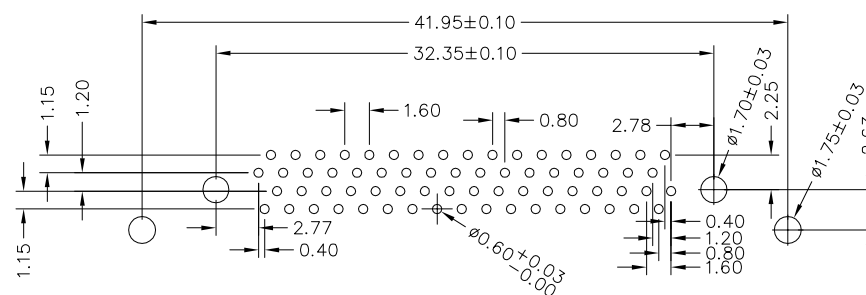
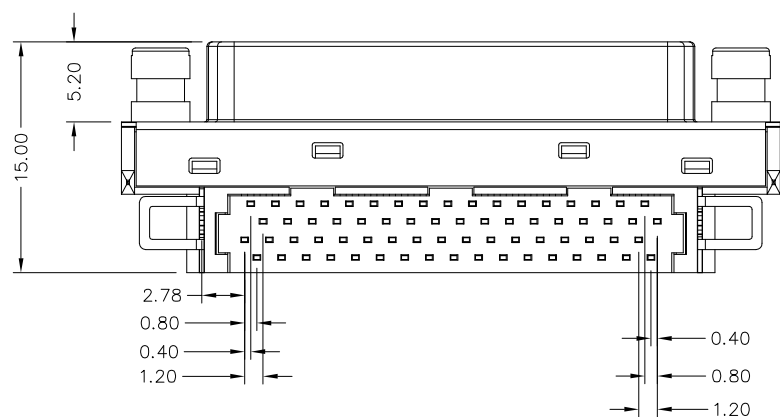


Current rating: 0.3 AMP.
Withstanding voltage: 250V AC
Contact resistance: 35 mΩ Max.
Insulation resistance: 500MΩ Min.
Temperature range: -45°C to +105°C



PCB layout

6	Screws	Steel	Plated: Ni
5	Board lock	Copper alloy	Plated: Sn
4	Cover	Thermoplastic	Color: black
3	Housing	Thermoplastic	Color: black
2	Shell	SPCC	Plated: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

				QUALITY SYMBOLS	Tolerance	NAME:	VHDCI 68pin female right angle				PART NO.	B06-068611AA-01			
	2019/09/17	Add dimensioning	King Zhou	☐ : ☒ :	x. ±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
	2017/01/16	First edition release	King Zhou	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2017/01/16	Jing Li	King Zhou		B06-001		
				☒ : ☒ :	.xx ±0.25	 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770									
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	 										
8		7		6		5		4		3		2		1	