

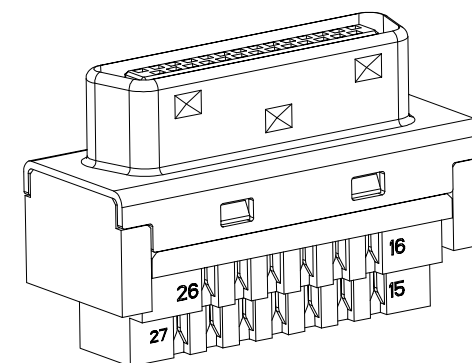
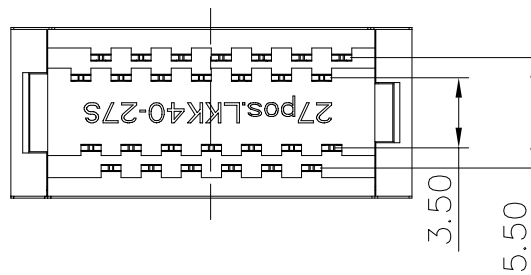
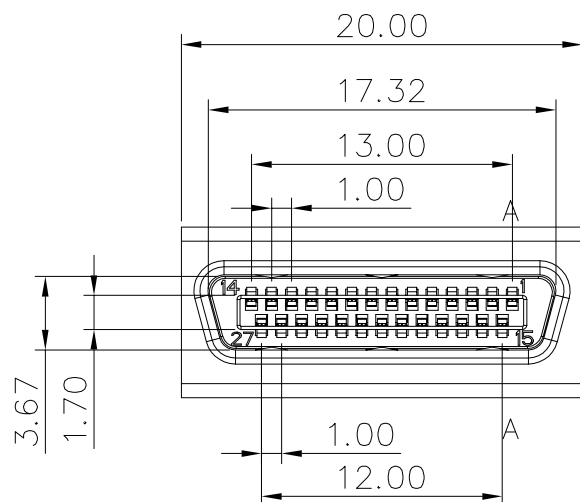


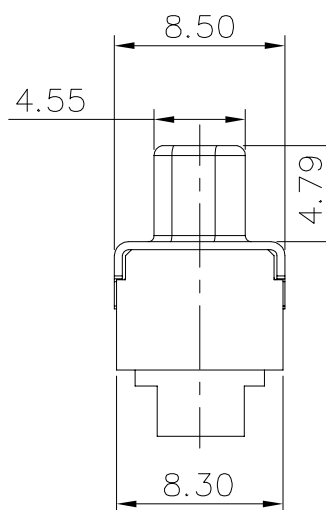

3D view

Current rating: 1A
 Insulation resistance: 500mohm min.
 Withstanding voltage: 250V AC
 Insulation resistance: 500MΩ Min.
 Temperature range: -45℃ to +105℃
 ROHS compliant

4	Housing	LCP UL94V-0	Color: black
3	Cover	LCP UL94V-0	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	C5191	Contact area: Au 5u Solder area: Sn
Item	Desc.	Material	Remarks

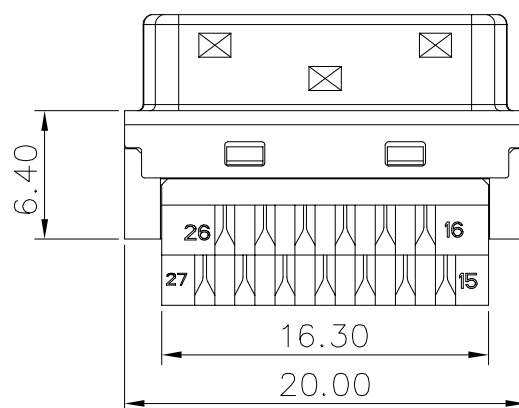


QUALITY SYMBOLS

□: □: CRITICAL MAJOR
 ZERO DEFECTS.P.C

Tolerance

x. ±0.60
 .x ±0.40
 .xx ±0.25



NAME: DH40-27S 27pin male solder conn.

REV: A UNIT: mm DRW BY: CHK BY: APP BY: DRAWING NO. B01-038

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
 TEL: 0769-85181660 85181770

△	2021/04/17	First edition release	Dean Fan
SIDE	DATE	DESCRIPTION	APPROVER