
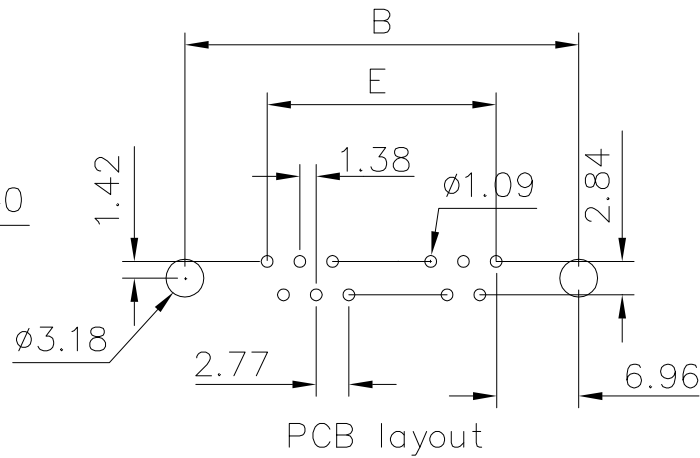


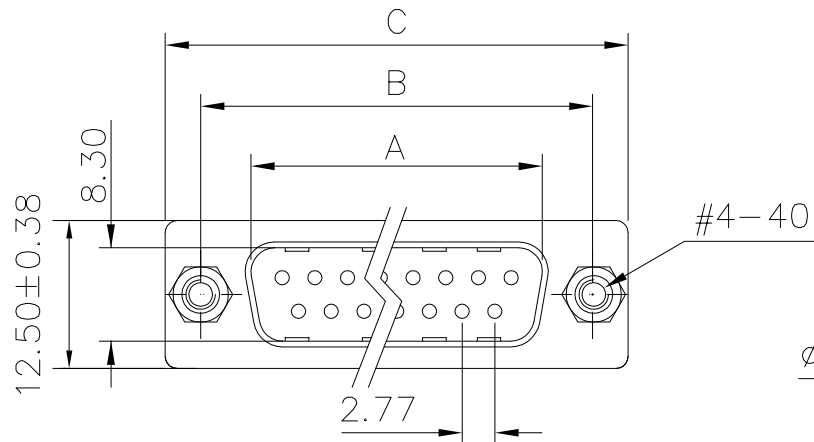

Pin No.	A	B	C	D	E
09	16.92	24.99	30.81	19.28	11.08
15	25.35	33.30	39.20	27.51	19.39
25	38.96	47.04	53.05	41.28	33.24
37	55.42	63.50	69.40	57.71	49.86

Current rating: 5A
 Withstanding voltage: 1000V AC
 Insulation resistance: 1000MΩ Min.
 Temperature range: -55℃ to +105℃
 ROHS compliant

Part No.:

B05-0XX7X1XD-02

No.of contact:

09: 9pos

15: 15pos

25: 25pos

37: 37pos

Housing color:

1: Black



5: White

6: Blue

Terminal plating:

4: Full Au 2u"

5: Full Au 1u"

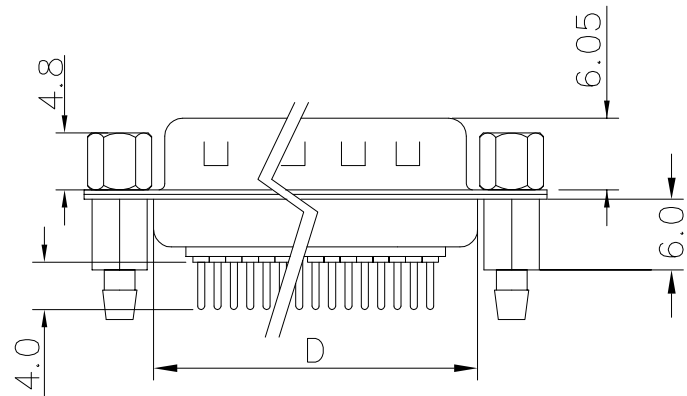

6	Screw	Steel	Palting: Ni
5	Boardlock	Copper alloy	Palting: Sn
4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Palting: Sn
2	Front shell	SPCC	Palting: Ni
1	Terminal	Copper alloy	Palting: see part no.
Item	Desc.	Material	Remarks

QUALITY SYMBOLS

□: ☒: x: ±0.60

CRITICAL MAJOR .x ±0.40

▽: ▽: .xx ±0.25


ZERO DEFECTS.P.C

Tolerance

x: ±0.60

.x ±0.40

.xx ±0.25



NAME:

D-SUB machined pin male vertical

REV:

A

SCALE:

N:1

UNIT:

mm

DRW BY

Huangmei

CHK BY

Jack Chen

APP BY

DRAWING NO.

B05-179

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
 TEL: 0769-85181660 85181770

△

2019/04/11

First edition release

Jack Chen

SIDE

8

7

DESCRIPTION

APPROVER

5

4

3

2

1