


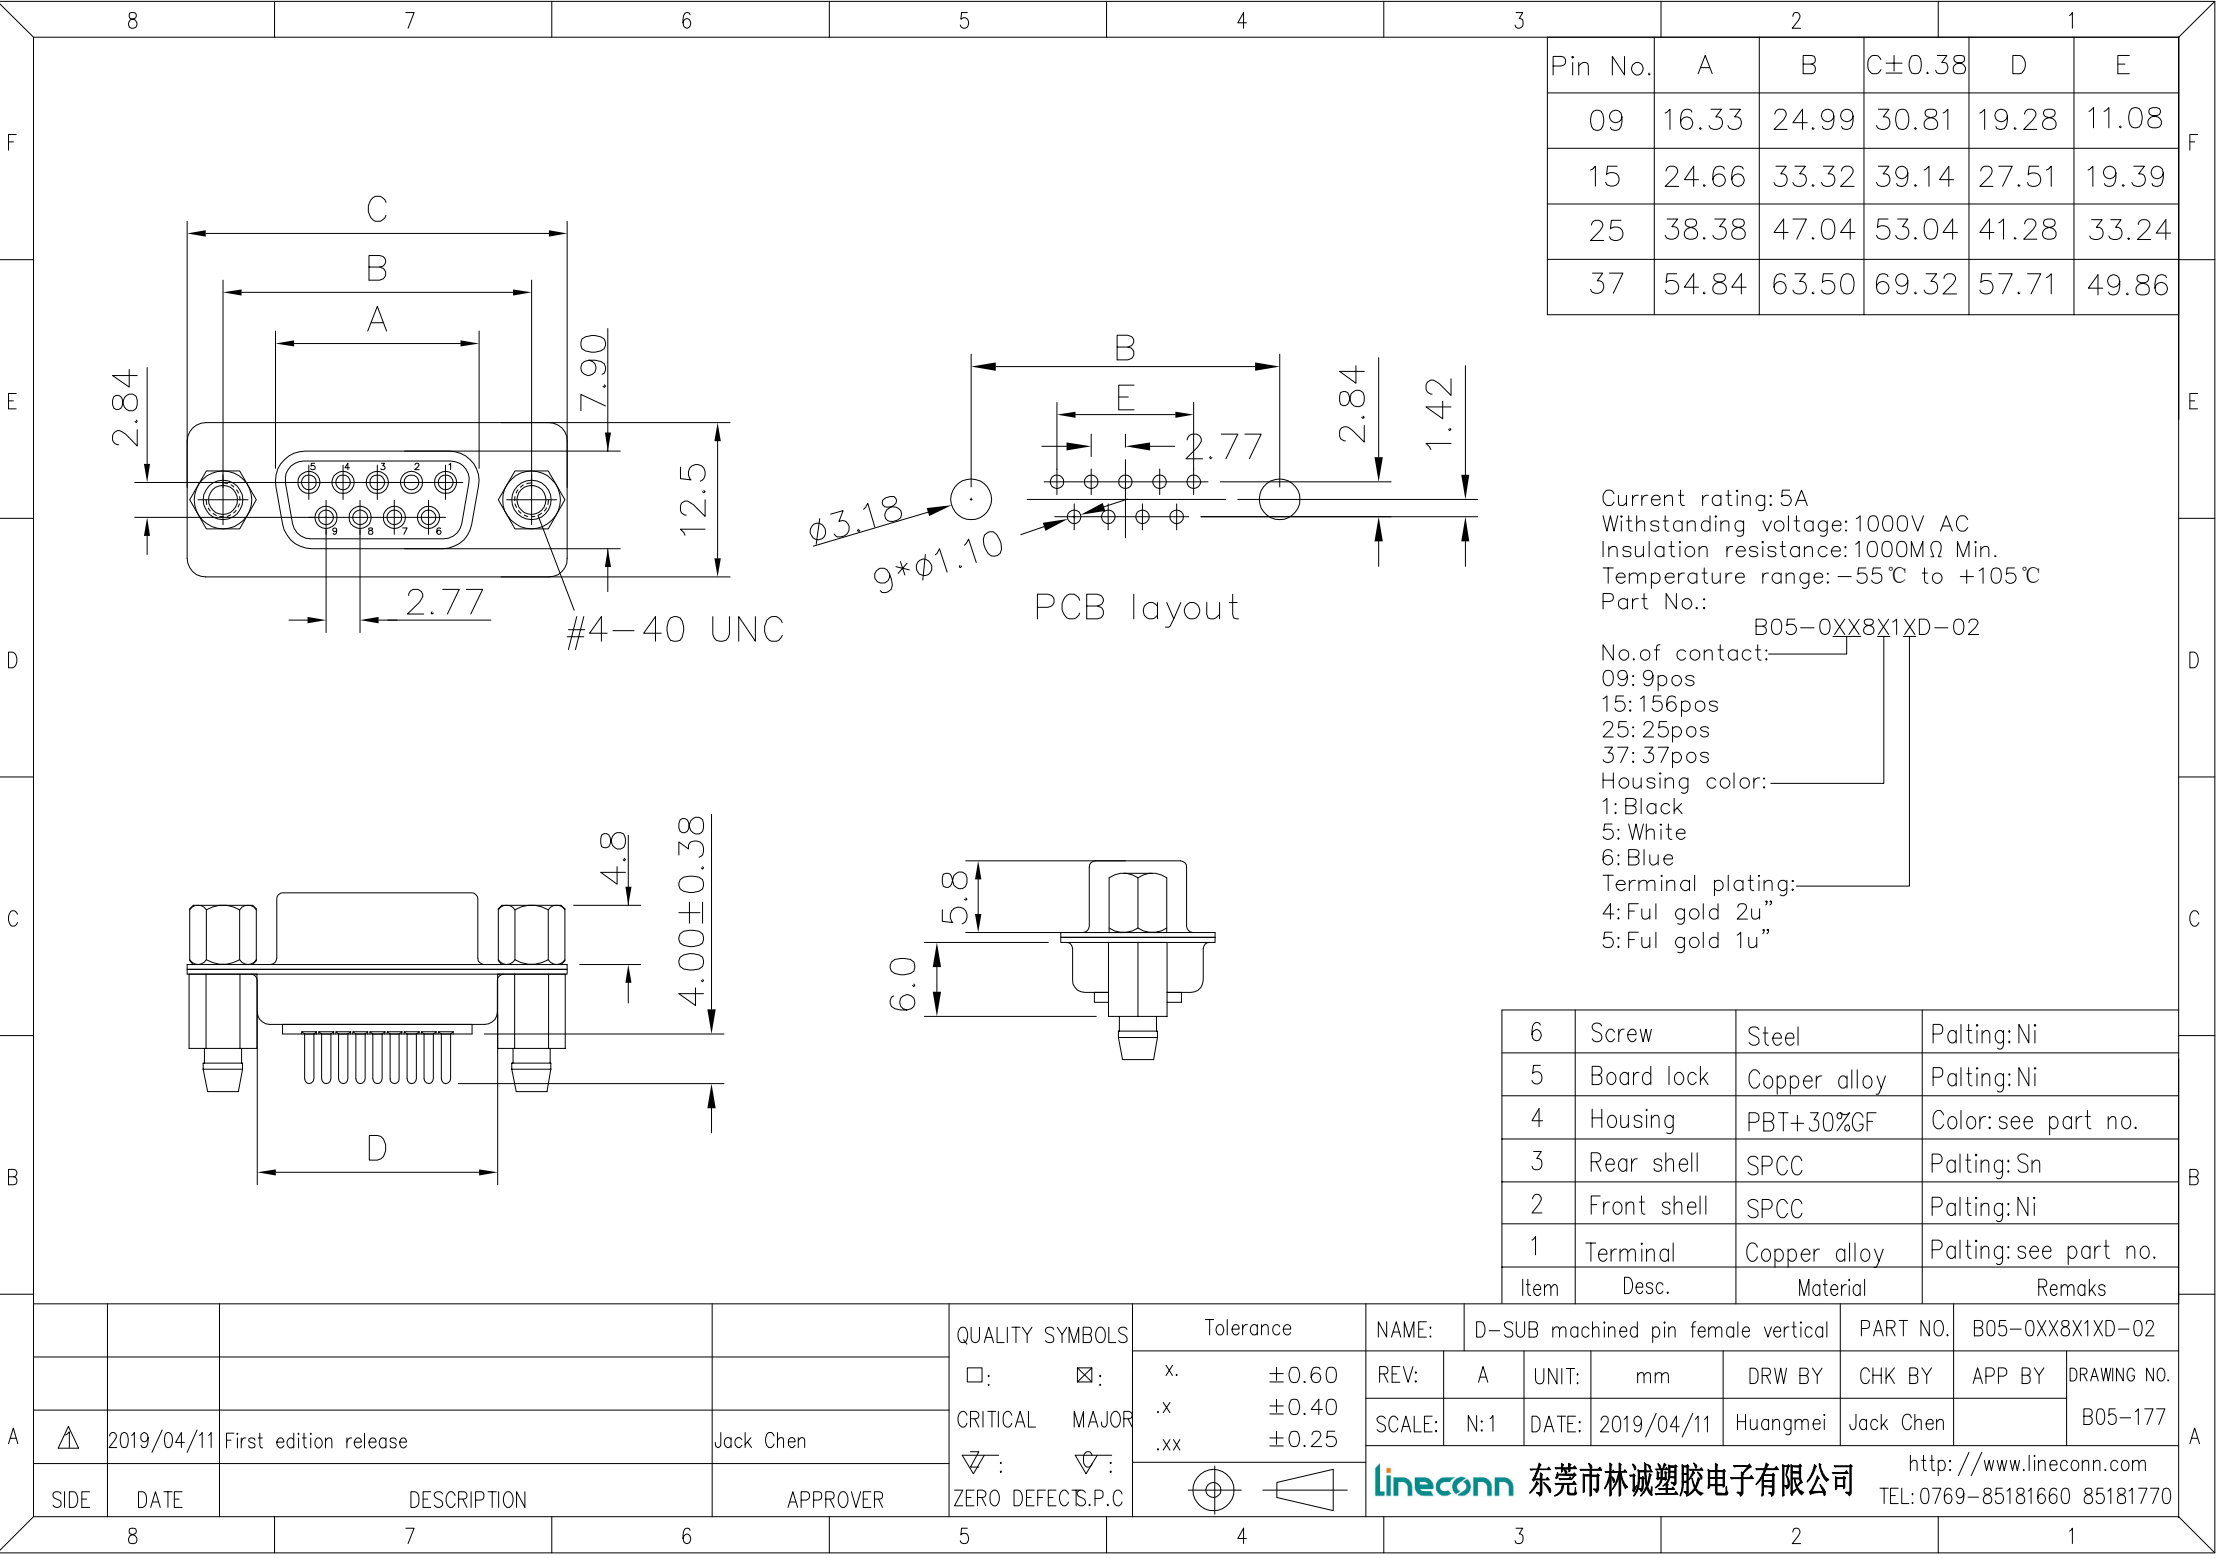

Pin No.	A	B	C±0.38	D	E
09	16.33	24.99	30.81	19.28	11.08
15	24.66	33.32	39.14	27.51	19.39
25	38.38	47.04	53.04	41.28	33.24
37	54.84	63.50	69.32	57.71	49.86

Current rating:5A
Withstanding voltage:1000V AC
Insulation resistance:1000MΩ Min.
Temperature range:−55℃ to +105℃
Part No.:

B05-0XX8X1XD-02
No.of contact:
09: 9pos
15: 156pos
25: 25pos
37: 37pos
Housing color:
1: Black
5: White
6: Blue
Terminal plating:
4: Ful gold 2u”
5: Ful gold 1u”

6	Screw	Steel	Palting: Ni
5	Board lock	Copper alloy	Palting: Ni
4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Palting: Sn
2	Front shell	SPCC	Palting: Ni
1	Terminal	Copper alloy	Palting: see part no.
Item	Desc.	Material	Remaks

				QUALITY SYMBOLS	Tolerance	NAME:	D-SUB machined pin female vertical			PART NO.	B05-0XX8X1XD-02		
				□: ☒:	x. ±0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
				CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2019/04/11	Huangmei	Jack Chen		B05-177
				▽: ▽:	.xx ±0.25								
				ZERO DEFECTS.P.C									
SIDE	DATE	DESCRIPTION		APPROVER									