


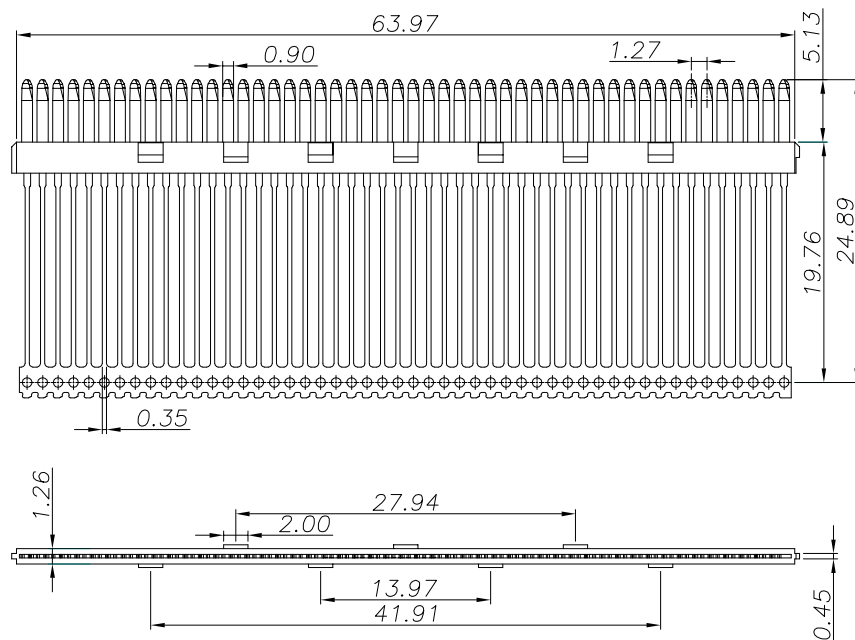

Rated current: 0.30A/contact
Dielectric withstanding voltage: 500V AC
Insulation resistance: 20mΩ min.
Temperature range: -55℃ to +125℃

3	Housing	LCP UL 94V-0	Color: black
2	Shell	Steel	Plating: Ni
1	Terminal	Phosphor bronze T=0.3mm	Contact area: Au 15u * Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

A	△				QUALITY SYMBOLS	Tolerance		NAME:	LFH 200pin male connector terminal 1x50pin			PART NO.	B04-200311H0-01		
	△				□: ☒:	x.	±0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	△	2022/11/14	First edition release	Jack Chen	CRITICAL MAJOR	.x	±0.40	SCALE:	N:1	DATE:	2022/11/14	Huangmei	Jack Chen		B04-069-2
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	.xx	±0.25	lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com							
		8	7	6	5			4			3			2	1