


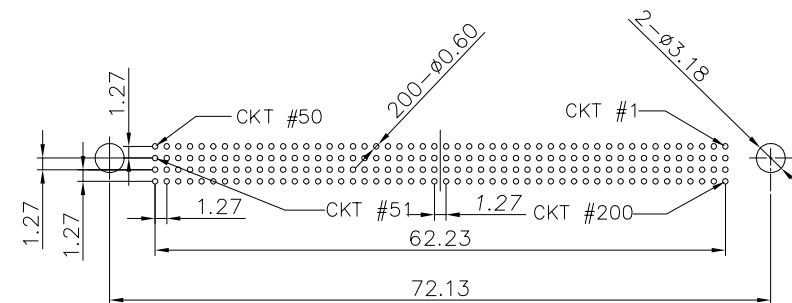

Rated current: 0.30A/contact
Dielectric withstanding voltage: 500V AC
Insulation resistance: 20mΩ min.
Temperature range: -55℃ to +125℃
ROHS compliant

5	Board lock	Copper alloy	Plating: Sn
4	Cover	LCP UL 94V-0	Color: black
3	Housing	LCP UL 94V-0	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au 15u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

NAME:		LFH 200pin female right angle DIP type Connector			PART NO.		B04-200611H0-01	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2023/03/11	Huangmei	Jack Chen		B04-074	
 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770

