


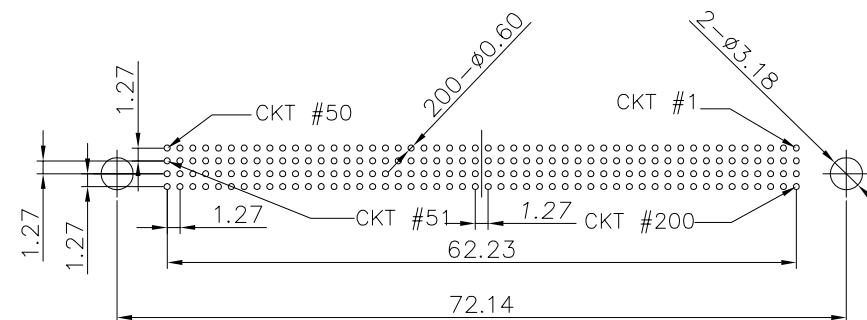
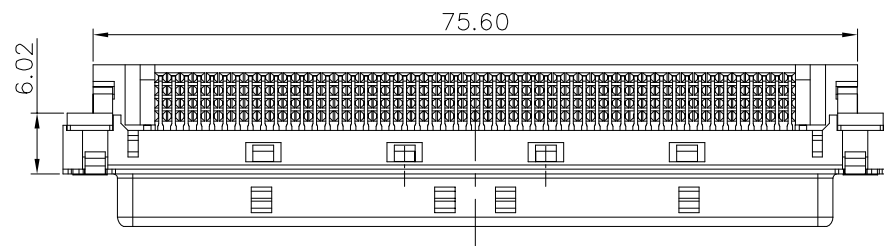
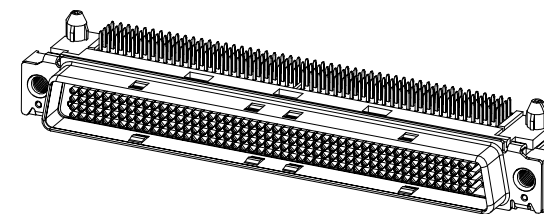




Recommended P.C.B Layout

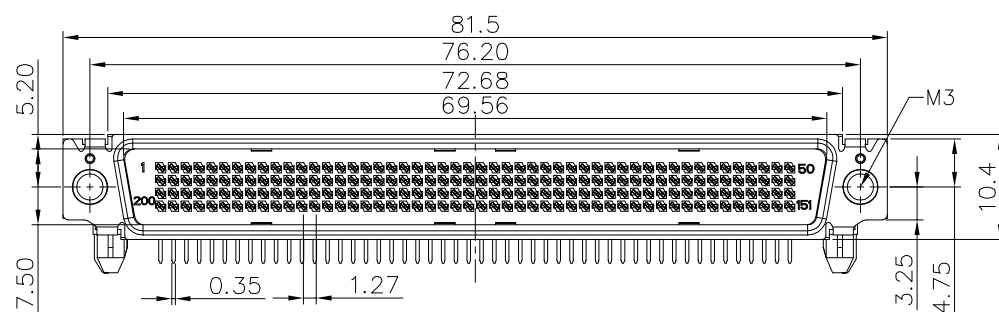

Rated current: 0.30A/contact
Dielectric withstanding voltage: 500V AC
Insulation resistance: 20mΩ min.
Temperature range: -55℃ to +125℃
ROHS compliant

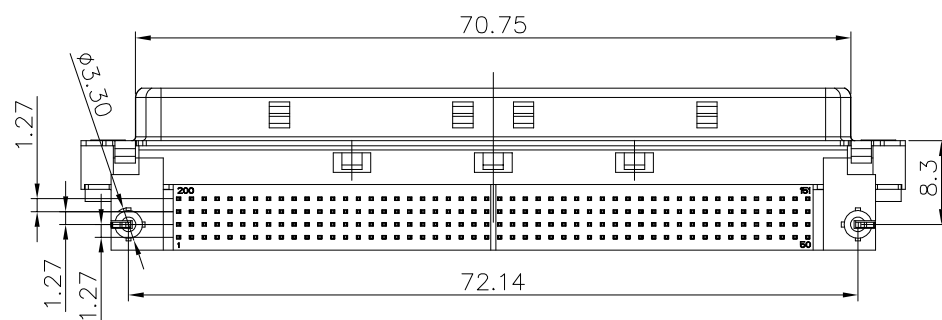

5	Board lock	Copper alloy	Plating: Sn
4	Cover	LCP UL 94V-0	Color: black
3	Housing	LCP UL 94V-0	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au 15u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

				QUALITY SYMBOLS	Tolerance		NAME:		LFH 200pin male right angle DIP type Connector				PART NO.		B04-200511H0-01	
				□ : ☒ :	x. .x .xx	±0.60 ±0.40 ±0.25	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
	2023/01/06	First edition release	Jack Chen	CRITICAL MAJOR			SCALE:	N:1	DATE:	2023/01/06	Huangmei	Jack Chen		B04-072		
SIDE	DATE	DESCRIPTION	APPROVER	▽ : ▽ :	ZERO DEFECT S.P.C	 	 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770					