

No.of contacts:	A	B	C	D	E
20	33.35	27.45	16.44	20.63	20.10
40	46.10	40.15	29.15	33.30	32.95
100	84.20	78.25	67.15	71.50	71.05


Current rating: 1 AMP.
Withstanding voltage:500V AC
Insulation resistance:500M Ω Min.
Contact resistance:35m Ω max.
Temperature range:−25℃ to +85℃
ROHS compliant
Part No.:

B03-0XX211EB-XX
No.of contacts:_____
20: 20P
40: 40P
100: 100P
Wire holder:_____
28AWG or 30AWG wire
6: 0.62mm
7: 0.75mm
9: 0.90mm
Bracket finishes:_____
L: latch bracket
S: screw bracket

5	Bracket	SPCC	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

NAME:	SCSI(HPCN) female IDC type,20,40,100pin				PART NO.	B03-0XX211EB-XX		
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2011/07/13	Jack Chen	Dean Fan		B03-041	

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL: 0769-85181660 85181770

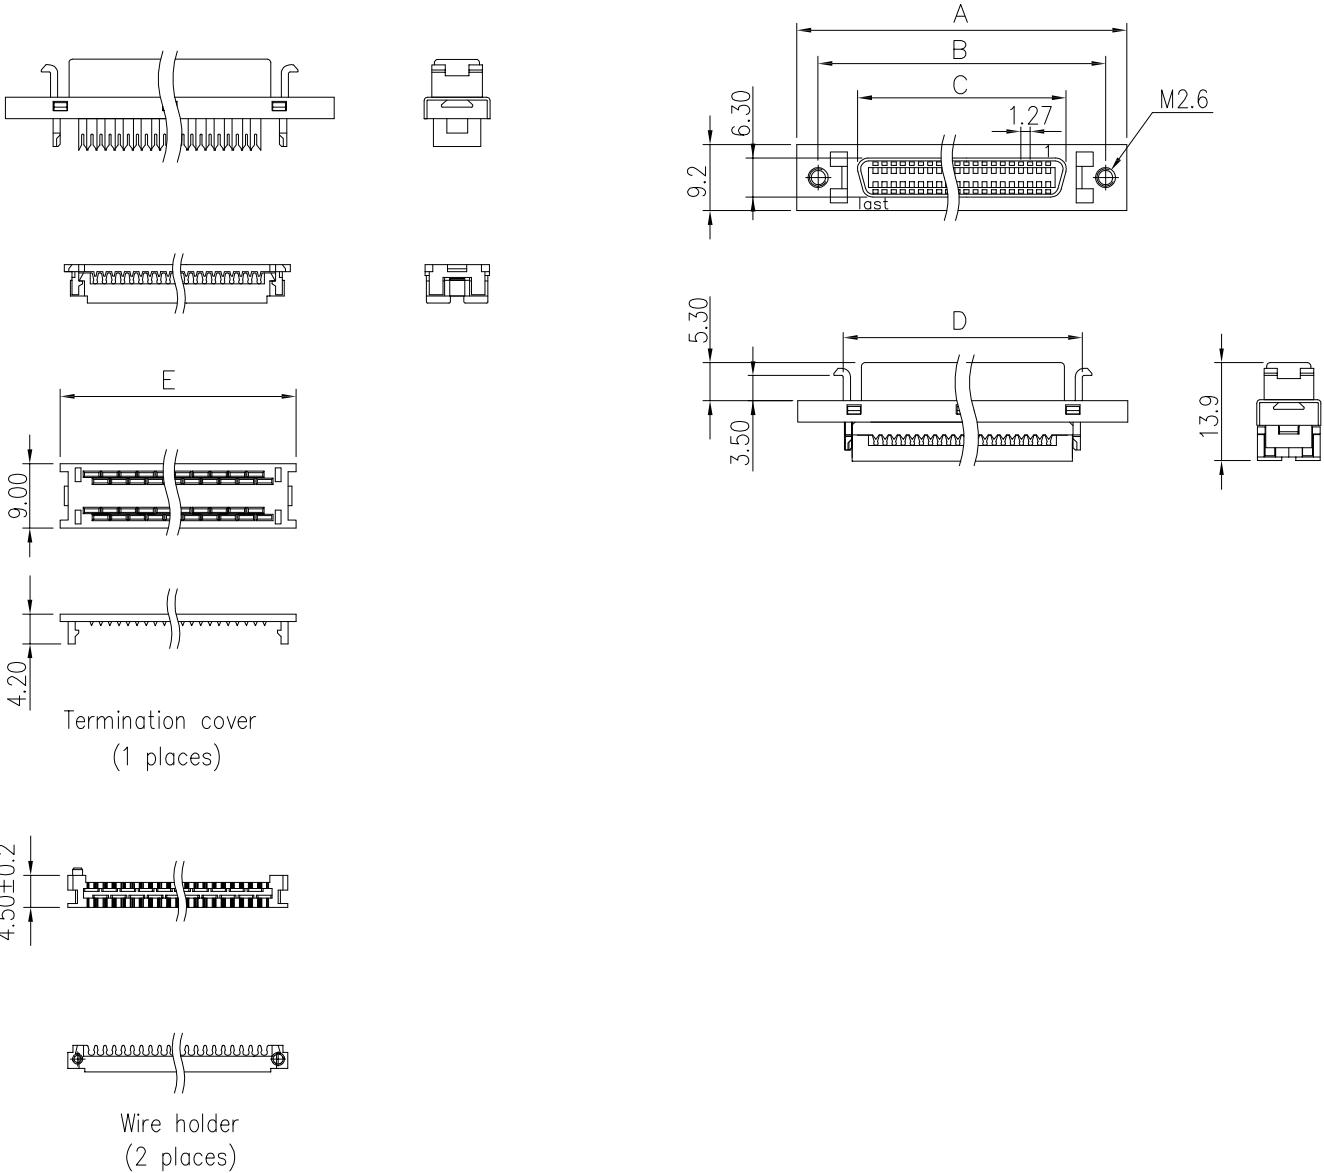

				QUALITY SYMBOLS	Tolerance	NAME:	SCSI(HPCN) female IDC type,20,40,100pin				PART NO.	B03-0XX211EB-XX		
				□: □:	x. ±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
				CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2011/07/13	Jack Chen	Dean Fan		B03-041	
				▽: ▽:	.xx ±0.25									
SIDE	DATE	DESCRIPTION		APPROVER										