

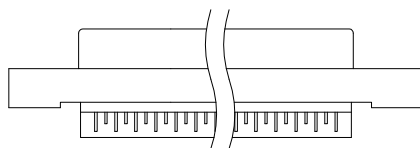
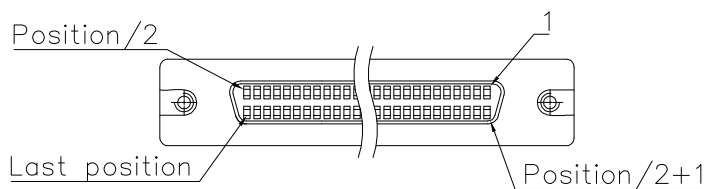


L type



S type



Current rating:1A
Withstanding voltage:500V AC
Contact resistance : 35mΩ max.
Insulation resistance:500MΩ Min.
Temperature range:−45℃ to +105℃
ROHS compliant
Part number:

B02-0XX418EC-0X

No.of contacts:

26: 26P

36: 36P

50: 50P

68: 68P

Bracket finishes:

L: latch bracket

S: screw bracket

Dimensions:

No.of contacts:	A	B	C	D
26	37.2	31.20	19.45	24.70
36	43.5	37.60	25.80	31.00
50	52.6	46.50	34.70	40.10
68	64.0	57.90	46.20	51.00

4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Description	Material	Remark

△	2021/11/09	Change tolerance	Carl Hu
△	2020/06/24	Changed the part number	Shuo Cao
△	2011/06/11	First edition release	King Zhou

QUALITY SYMBOLS
□: □: CRITICAL MAJOR
▽: ▽: ZERO DEFECT S.P.C

Tolerance
x. ±0.60
.x ±0.40
.xx ±0.25

NAME:	SCSI II(HPDB) female solder,with bracket 26,36,50,68pin	PART NO.	B02-0XX418EC-0X
REV:	E	UNIT:	mm
SCALE:	N:1	DATE:	2011/06/11
DRW BY	Yugong	CHK BY	Carl Hu
APP BY		DRAWING NO.	B02-020

Lineconn 东莞市林诚塑胶电子有限公司
http://www.lineconn.com
TEL:0769-85181660 85181770