


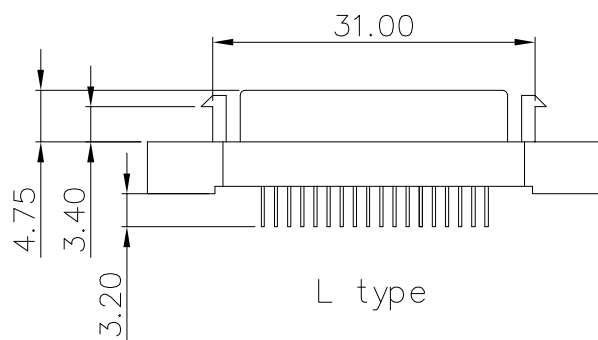
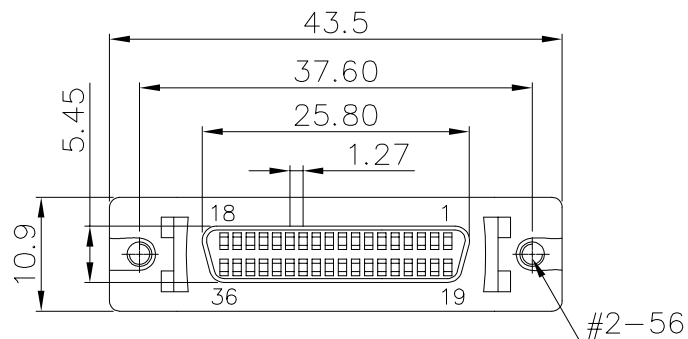


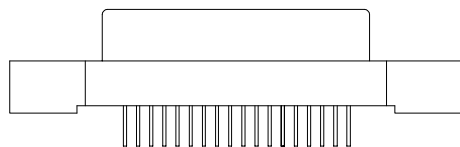

L type

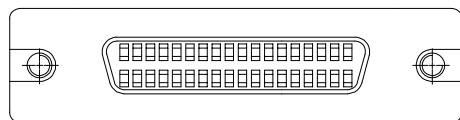

S type



PCB layout

Current rating:1 AMP.
Withstanding voltage:500V AC
Insulation resistance:500MΩ min.
Contact resistance: 35mΩ Max
Temperature range: -55℃ to +125℃
ROHS compliant

Part number:
B02-036818EC-2X
Bracket finishes: _____
L: latch bracket
S: screw bracket


3	Housing	PBT+30%GF	Color: black,UL94V-0
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/07/14	Change part number	Jack Chen
△	2008/08/11	Change tolerance	Jack Chen
△	2008/07/04	First edition release	Jack Chen

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

QUALITY SYMBOLS
□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25



NAME:	SCSI II(HPDB) 36pin female vertical with bracket for PCB				PART NO.	B02-036818EC-2X		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2008/07/04	Huangmei	Jack Chen		B02-002	

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL: 0769-85181660 85181770