


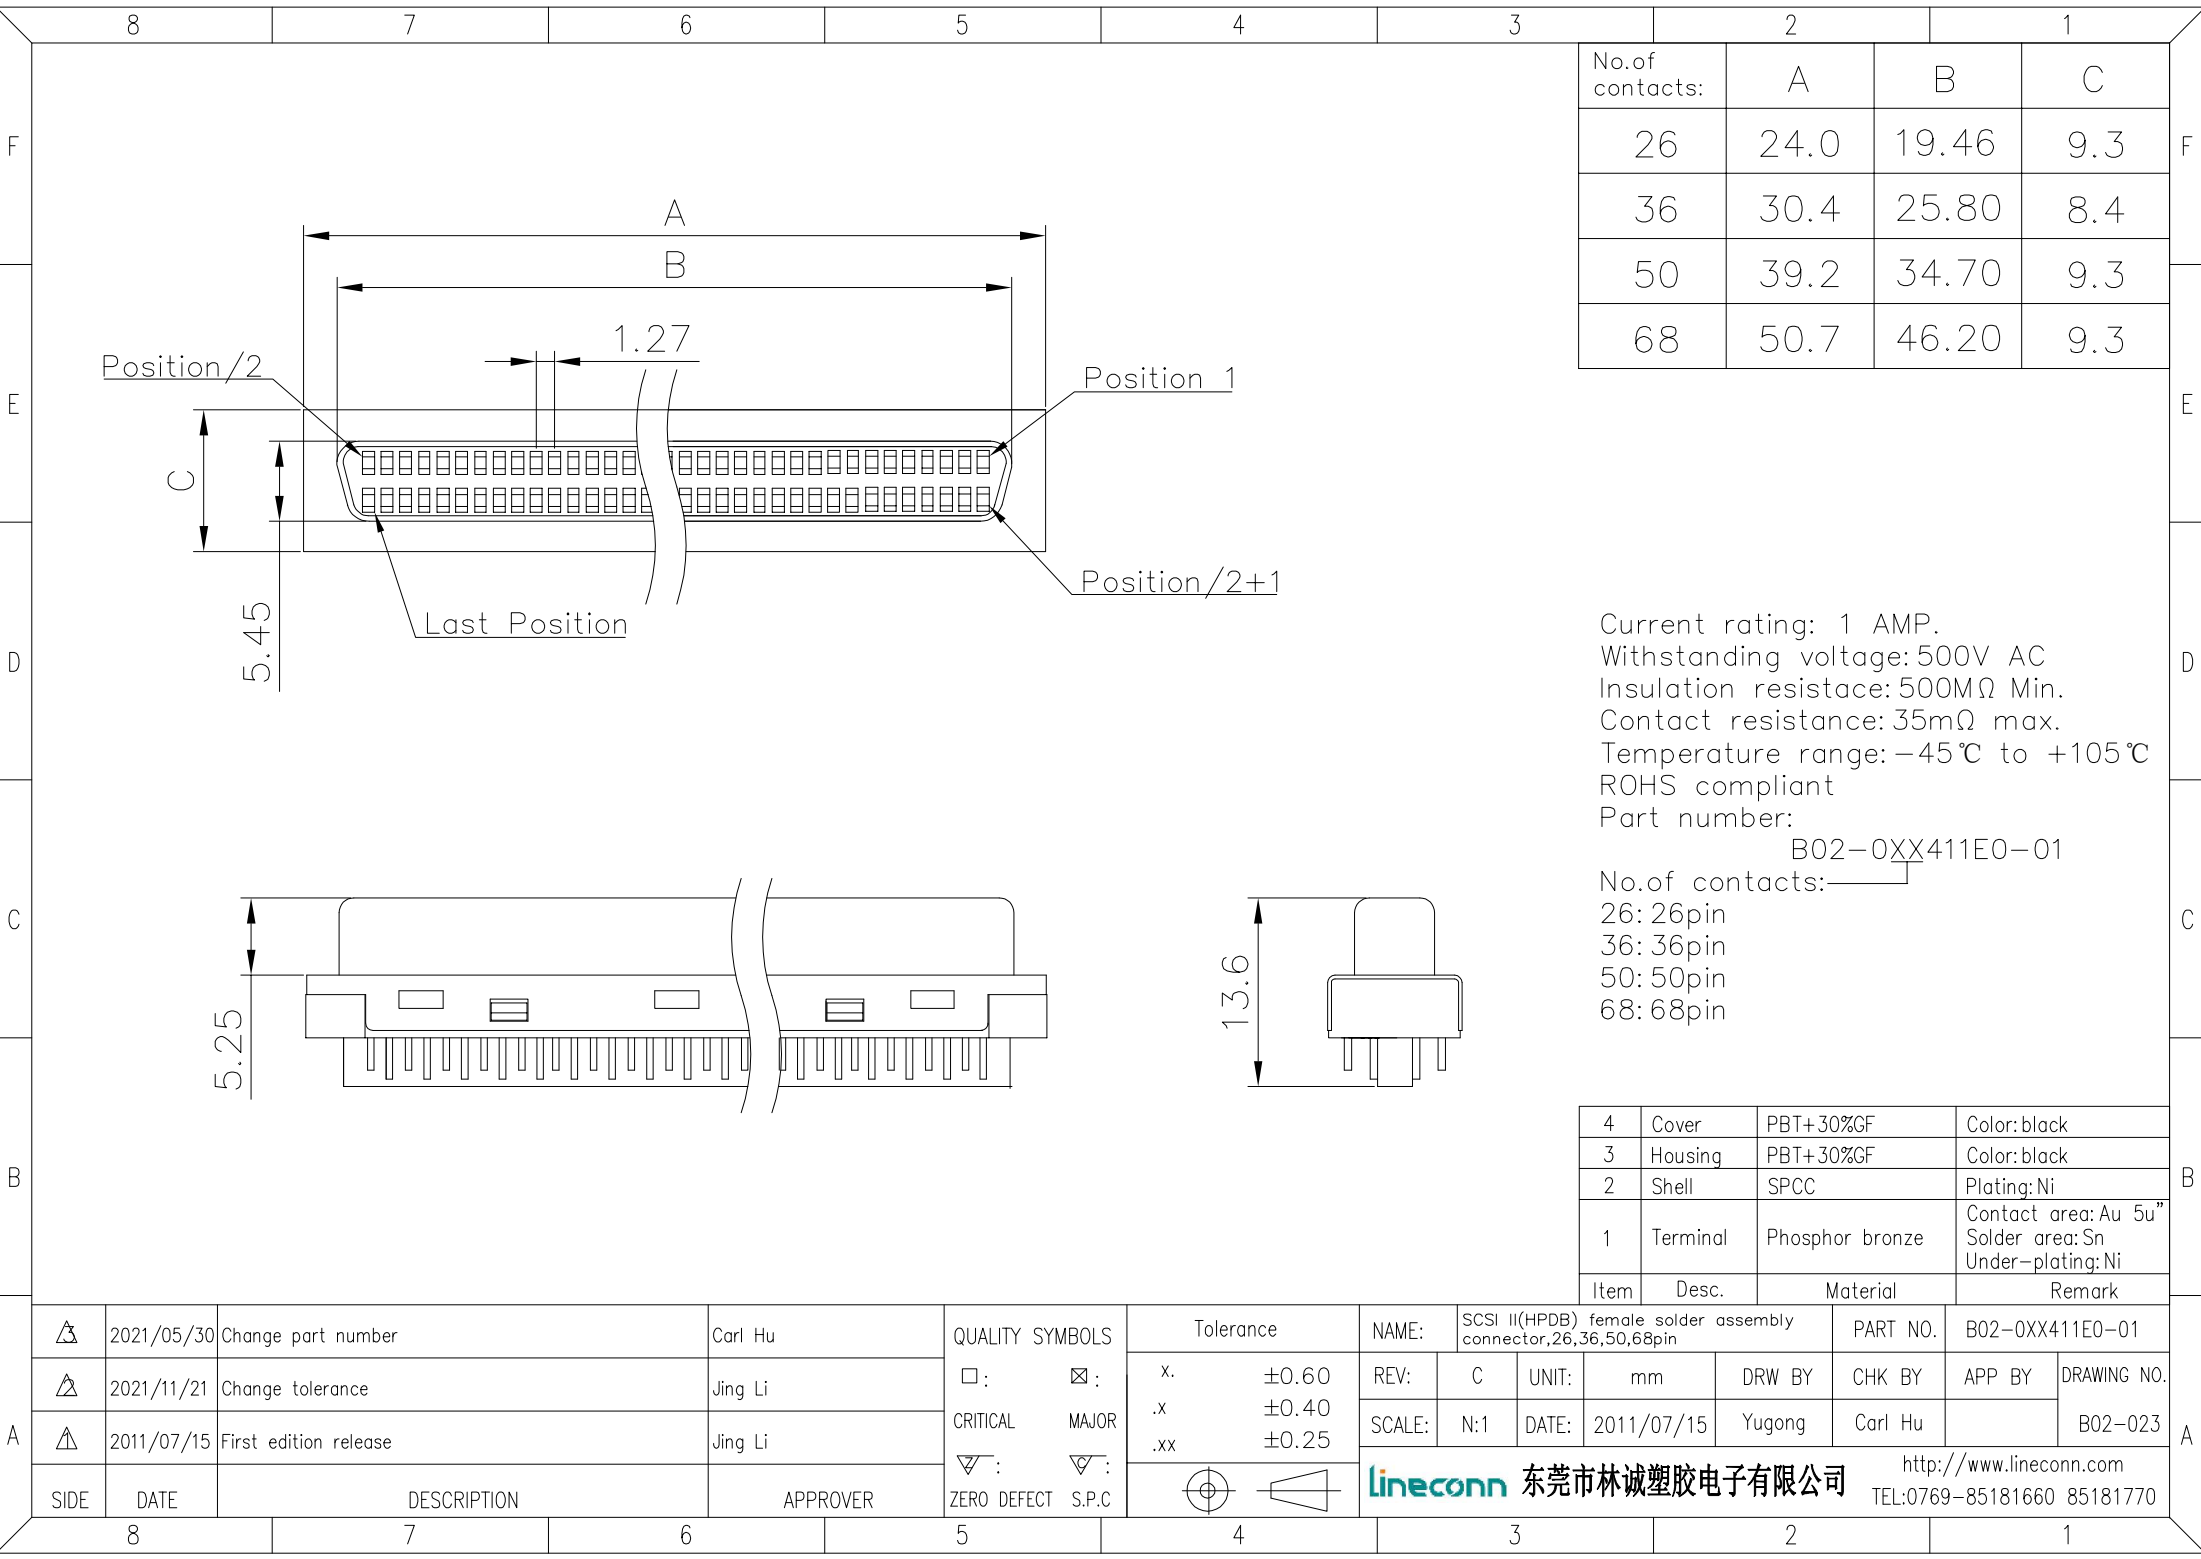

No.of contacts:	A	B	C
26	24.0	19.46	9.3
36	30.4	25.80	8.4
50	39.2	34.70	9.3
68	50.7	46.20	9.3

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -45℃ to +105℃
ROHS compliant
Part number:

B02-0XX411E0-01

No.of contacts:

- 26: 26pin
- 36: 36pin
- 50: 50pin
- 68: 68pin

4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

A		2021/05/30	Change part number	Carl Hu	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance		NAME: SCSII(HPDB) female solder assembly connector,26,36,50,68pin		PART NO.		B02-0XX411E0-01		A	
		2021/11/21	Change tolerance	Jing Li		x. ±0.60	REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY		DRAWING NO.
		2011/07/15	First edition release	Jing Li		.x ±0.40	SCALE:	N:1	DATE:	2011/07/15	Yugong	Carl Hu			B02-023
						.xx ±0.25									
	SIDE	DATE	DESCRIPTION	APPROVER		lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770									
8		7		6		5		4		3		2		1	

TEL: 0769-85181660 85181770