
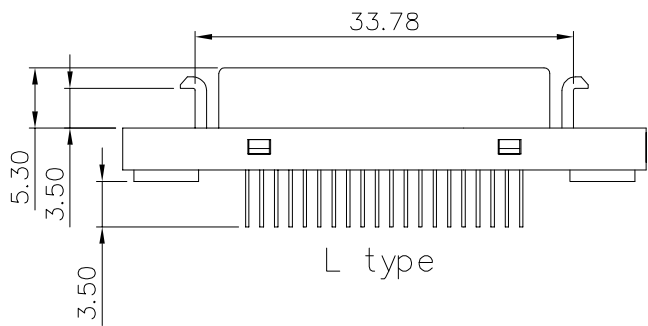
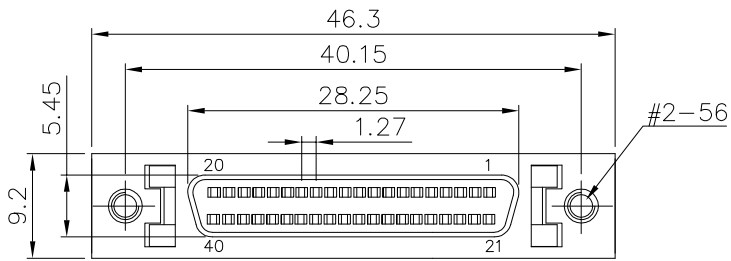
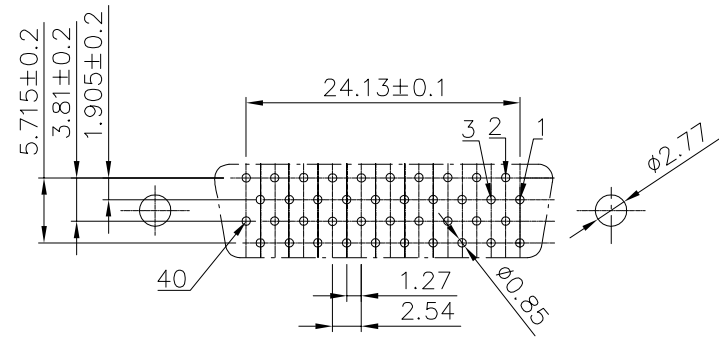



S type



PCB layout

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ min.
Contact resistance: 35mΩ Max
Temperature range: -55℃ to +125℃
ROHS compliant

Part number:
B02-040811EC-2X
Bracket finishes: _____
L: latch bracket
S: screw bracket

4	Latch	SPCC	Plating: Ni
3	Housing	PBT+30%GF	Color: black, UL94V-0
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/05/31	Change part number	Jack Chen
△	2013/03/19	Change tolerance	Jing Li
△	2012/08/22	First edition release	Jing Li


SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

QUALITY SYMBOLS

□: ☒: CRITICAL MAJOR
▽: ▽: ZERO DEFECT S.P.C

Tolerance

x. ±0.60
.x ±0.40
.xx ±0.25



NAME:	SCSI II(HPDB) 40pin female vertical with bracket for PCB				PART NO.	B02-040811EC-2X		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2012/08/22	Huangmei	Jack Chen		B02-018	

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL: 0769-85181660 85181770