
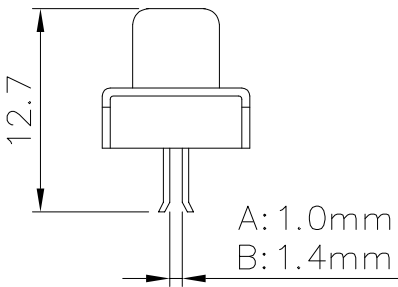
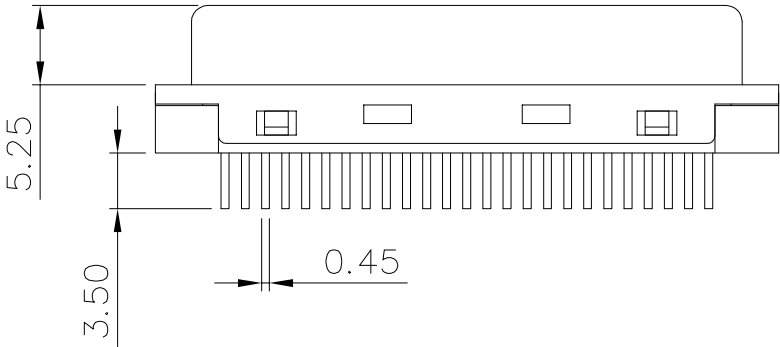


No.of contacts:	A	B	C
26	24.0	19.46	9.3
36	30.4	25.80	8.4
50	39.2	34.70	9.3
68	50.7	46.20	9.3

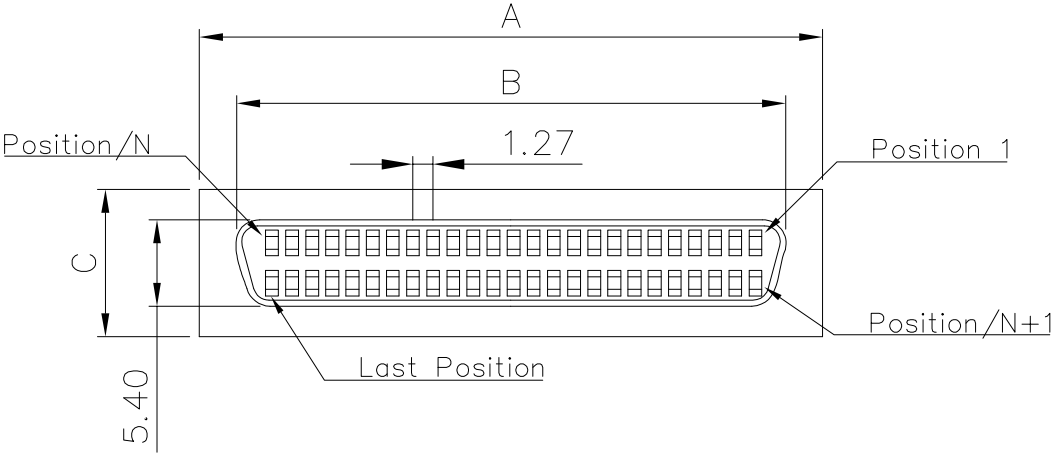

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -45℃ to +105℃
ROHS compliant
Part number:
B02-0XXF11E0-X1
No.of contacts:
26: 26pin
36: 36pin
50: 50pin
68: 68pin
PCB MOUNTING:
A: 1.0mm(for PCB 1.2mm)
B: 1.4mm(for PCB 1.6mm)

3	Housing	PBT+G.F.30% (UL 94V-0)	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2020/05/09	Change part number	Jack Chen
△	2016/12/20	Change tolerance	King Zhou
△	2016/08/04	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	SCSI II(HPDB) male clip type for PCB, assembly connector				PART NO.	B02-0XXF11E0-X1		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2016/08/04	Huangmei	Jack Chen		B02-060	
lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com				
				TEL:0769-85181660 85181770				