


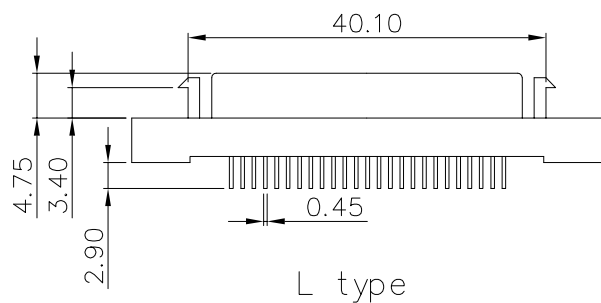


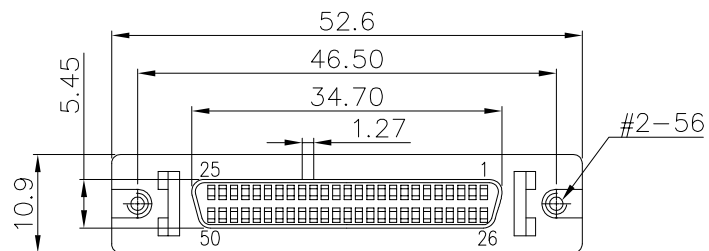

L type



S type



Current rating:1 AMP.
Withstanding voltage:500V AC
Insulation resistance:500M Ω min.
Contact resistance: 35m Ω Max
Temperature range:-55 $^{\circ}$ C to +125 $^{\circ}$ C
ROHS compliant
Part number:

B02-050F18EN-XX

PCB mounting:

A:1.0mm(for PCB 1.2mm)

B:1.4mm(for PCB 1.6mm)

Bracket finishes:

L:latch bracket

S:screw bracket

3	Housing	PBT+30%GF	Color:black,UL94V-0
2	Shell	Zinc alloy	Plating:Ni
1	Terminal	Phosphor bronze	Contact area:Au 5u" Solder area:Sn Under-plating:Ni
Item	Desc.	Material	Remark

	2021/06/14	Change part number	Jack Chen	QUALITY SYMBOLS □: ☒: x. ±0.60 CRITICAL MAJOR .x ±0.40 ▽: ▽: .xx ±0.25 ZERO DEFECT S.P.C	Tolerance	NAME:	SCSI II(HPDB) 50pin female clip type for PCB,with bracket				PART NO.		B02-050F18EN-XX		
	2016/09/27	Change tolerance	King Zhou			REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO		
	2016/08/04	First edition release	King Zhou			SCALE:	N:1	DATE:	2016/08/04	Huangmei	Jack Chen		B02-061		
SIDE	DATE	DESCRIPTION	APPROVER		lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770										
8		7		6		5		4		3		2		1	