


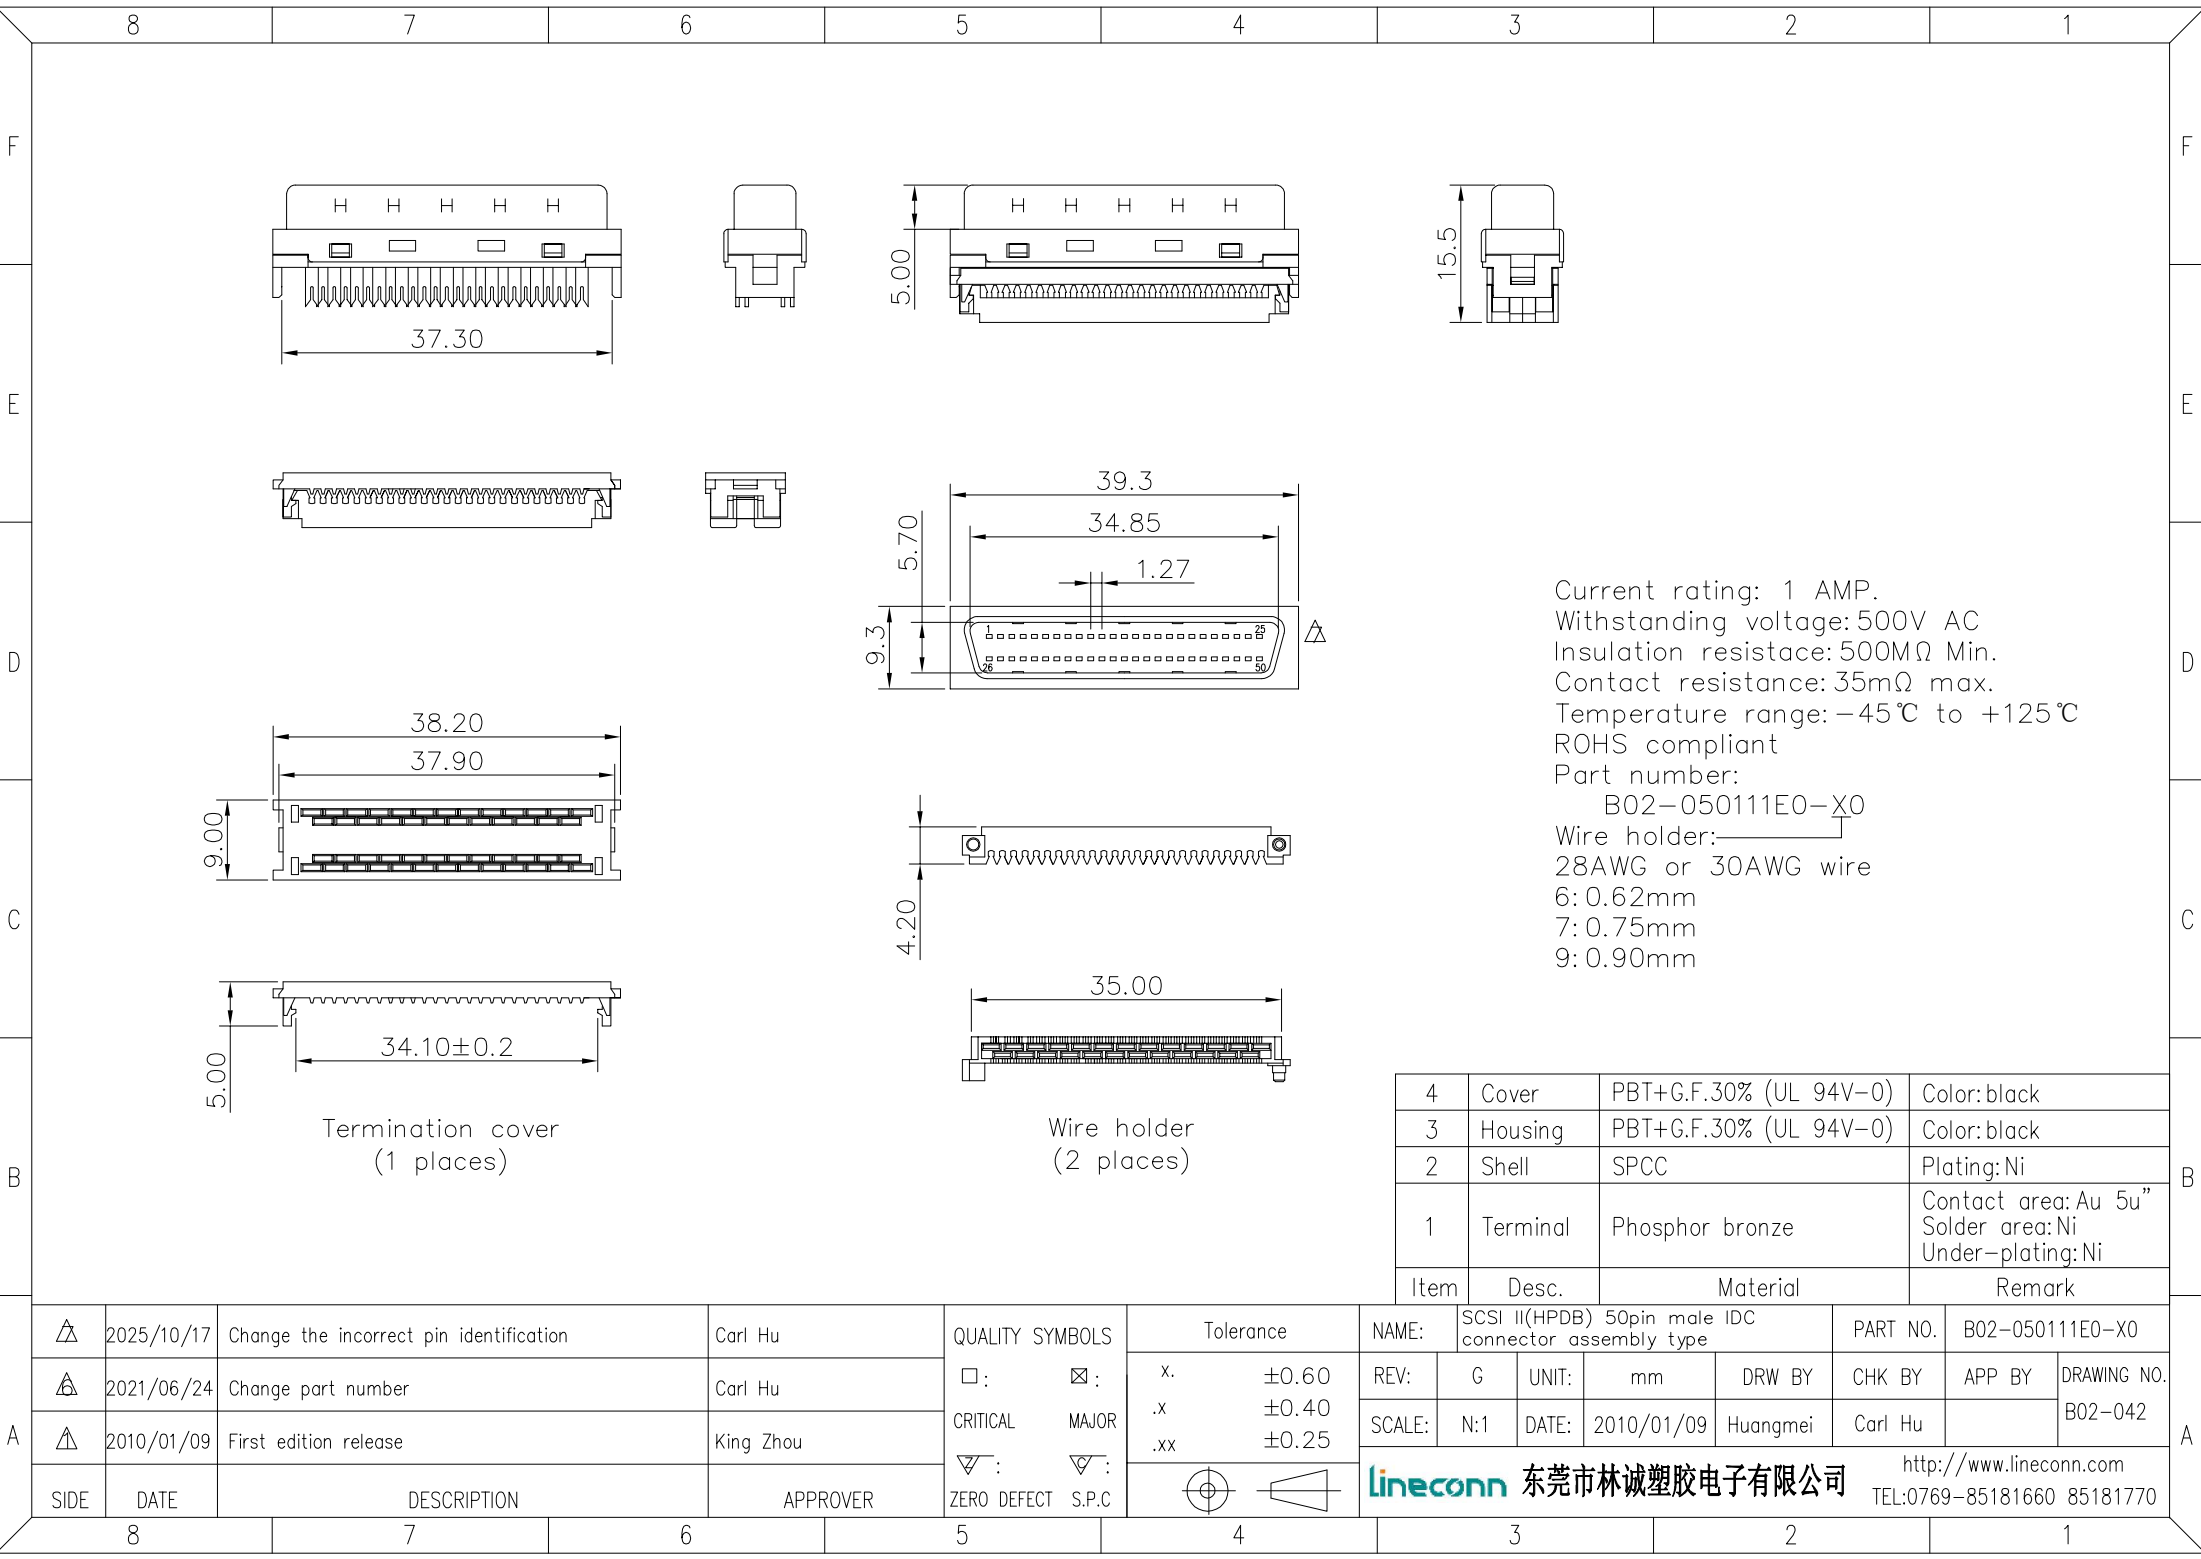

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -45℃ to +125℃
ROHS compliant
Part number:
B02-050111E0-X0
Wire holder:
28AWG or 30AWG wire
6: 0.62mm
7: 0.75mm
9: 0.90mm

4	Cover	PBT+G.F.30% (UL 94V-0)	Color: black
3	Housing	PBT+G.F.30% (UL 94V-0)	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Ni Under-plating: Ni
Item	Desc.	Material	Remark

A	△	2025/10/17	Change the incorrect pin identification	Carl Hu	QUALITY SYMBOLS □ : ☒ : CRITICAL MAJOR ▽ : ▽ : ZERO DEFECT S.P.C	Tolerance		NAME:		SCSI II(HPDB) 50pin male IDC connector assembly type			PART NO.		B02-050111E0-X0	
	△	2021/06/24	Change part number	Carl Hu		.x ±0.60 .x ±0.40 .xx ±0.25 	REV:	G	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B02-042		
	△	2010/01/09	First edition release	King Zhou			SCALE:	N:1	DATE:	2010/01/09	Huangmei	Carl Hu				
							lineconn 东莞市林诚塑胶电子有限公司								http://www.lineconn.com	
	SIDE	DATE	DESCRIPTION			APPROVER	ZERO DEFECT S.P.C				TEL:0769-85181660 85181770					
8		7		6		5		4		3		2		1		