

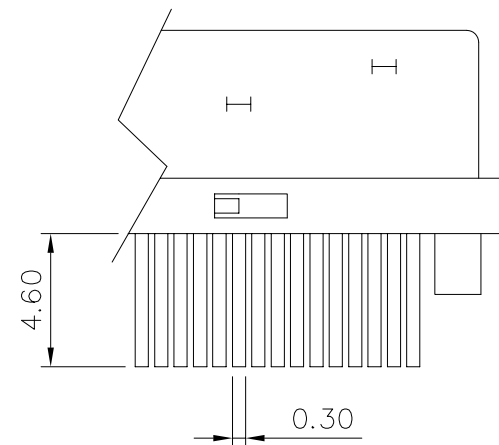
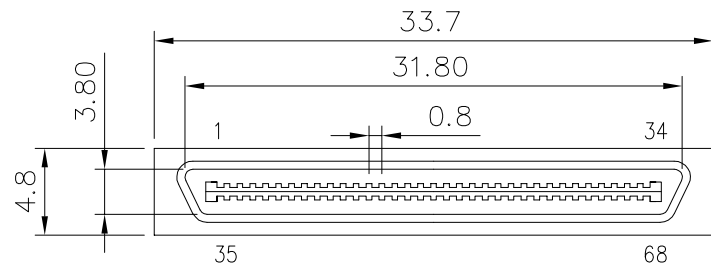




Detail A scale 1.5:1

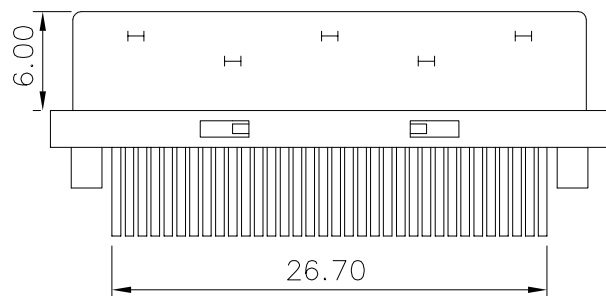

Current rating:1A
Voltage rating:30V AC(rms)
Withstanding voltage:250V AC
Contact resistance : 50mΩ max.
Insulation resistance:500MΩ Min.
Temperature range:−45℃ to +105℃
ROHS compliant

3	Housing	PBT+G.F.30%	Color:black
2	Sheel	SPCC	Plating:Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/06/30	Changed part number	Carl Hu
△	2018/10/14	Changed tolerance	Jing Li
△	2018/06/03	First edition release	Jing Li

QUALITY SYMBOLS
□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance	
x.	±0.80
.x	±0.50
.xx	±0.25

NAME:	VHDCI(pitch 0.8mm) 68pin male clip type for PCB				PART NO.	B06-068G11EN-01		
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2018/06/03	Yugong	Carl Hu		B06-018	

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL: 0769-85181660 85181770

SIDE	DATE	DESCRIPTION			APPROVER	ZERO DEFECT	S.P.C		Lineconn 东莞市林诚塑胶电子有限公司	TEL: 0769-85181660				
8		7		6		5		4		3		2		1