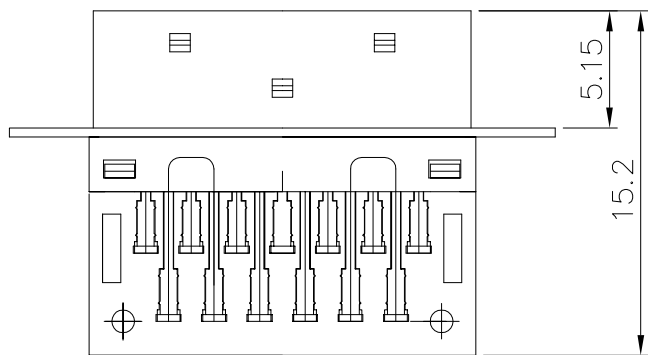
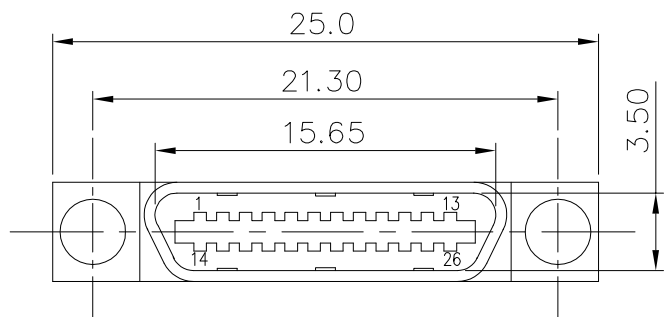


Termination cover
(2 places)

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500M Ω Min.
Contact resistance: 35m Ω max.
Temperature range: -45 $^{\circ}$ C to +125 $^{\circ}$ C
ROHS compliant

4	Cover	PBT+G.F.30% (UL 94V-0)	Color: beige
3	Housing	PBT+G.F.30% (UL 94V-0)	Color: beige
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Ni Under-plating: Ni
Item	Desc.	Material	Remark

	2021/06/19	Change part number	Carl Hu	QUALITY SYMBOLS □ : ☒ : CRITICAL MAJOR ▽ : ▽ : ZERO DEFECT S.P.C	Tolerance x. ±0.60 .x ±0.40 .xx ±0.25	NAME:		CISCO 26pin(pitch 1.0mm) male IDC connector				PART NO.		B06-0261C1EN-01	
	2012/01/09	Change tolerance	Jing Li			REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B06-008		
	2008/04/07	First edition release	Jing Li			SCALE:	N:1	DATE:	2008/04/07	Huangmei	Carl Hu				
SIDE	DATE	DESCRIPTION	APPROVER			lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770									