

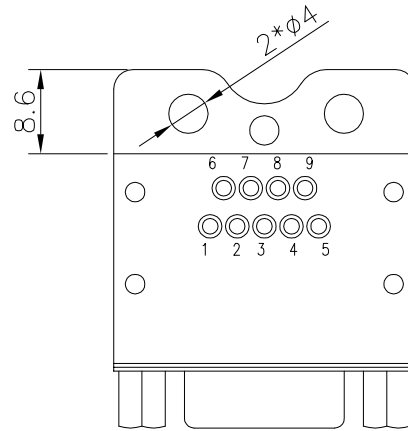
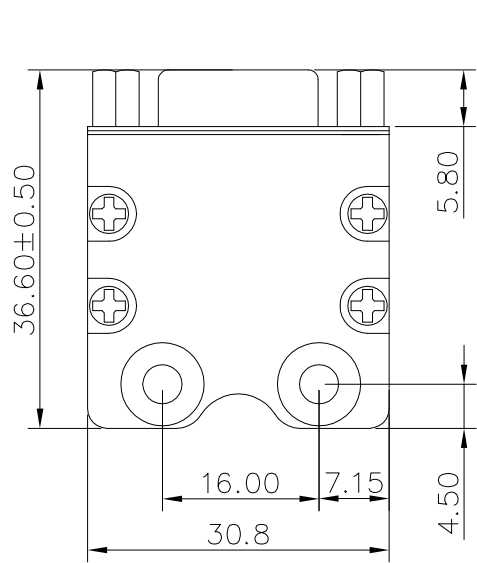


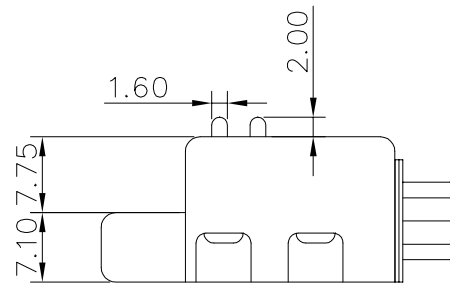

Current rating: 3 AMP
Withstanding voltage: 1000V AC
Insulation resistance: 1000mΩ min.
Temperature range: -55℃ to +125℃
ROHS compliant

Part number:
B05-009611NX-BM
Nut thread: _____
B: M2.6
D: #4-40

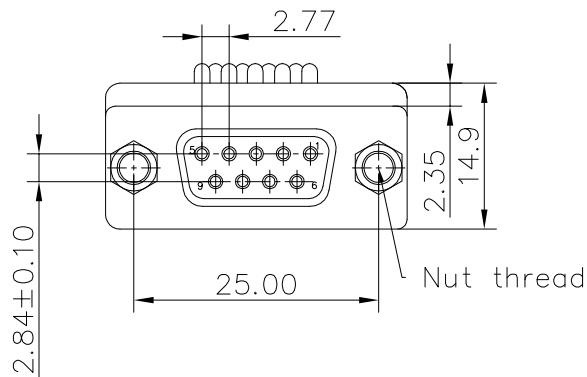

6	Nut	Steel	Palting: Ni
5	Hood	PA66 GF.30%	Color: black
4	Housing	PBT+30%GF	Color: black
3	Rear shell	SPCC	Palting: Sn
2	Front shell	SPCC	Palting: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2022/11/24	Change name	Carl Hu
△	2018/07/13	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x. ±0.60	
CRITICAL	MAJOR	.x ±0.40	
▽:	▽:	.xx ±0.25	
ZERO DEFECT	S.P.C		

NAME:		OXR-DPS09-I probe connector, 9pin female,mechanical arm side			PART NO.	B05-009611NX-BM	
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2018/07/13	Yugong	Carl Hu		B05-067
 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770		