
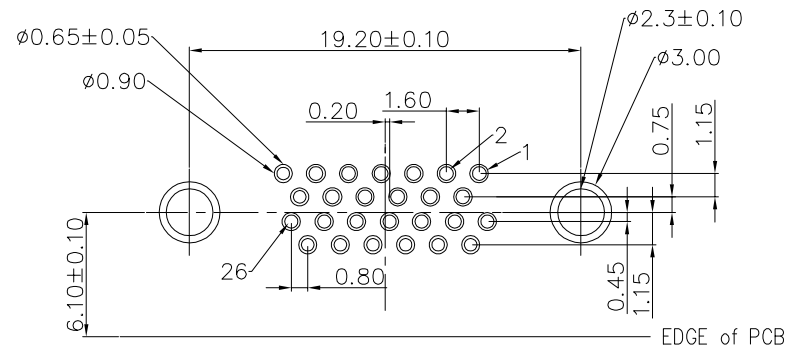

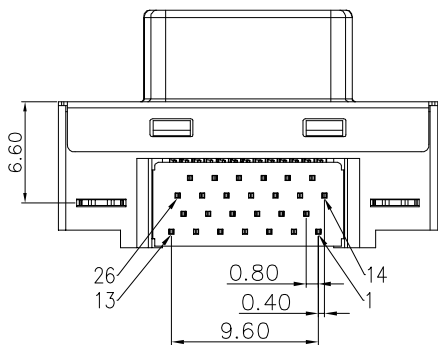

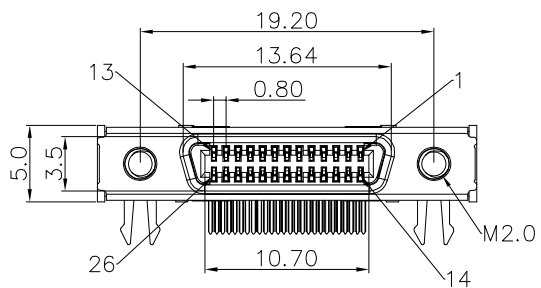
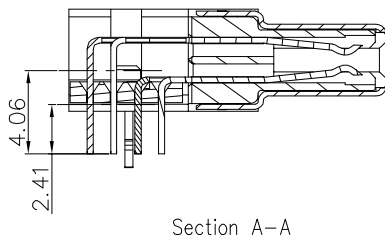


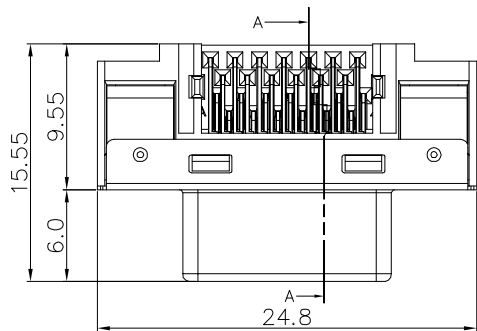

PCB layout

Contact current voltage: 125V AC
△ Current rating: 0.5A
Insulation resistance: 1000MΩ Min
Withstanding voltage: 350V AC
Contact resistance: 70mΩ Max
Temperature range: -45°C~+105°C
ROHS compliant

6	Nut	Copper alloy	Plating: Ni
5	Board lock	Copper alloy	Plating: Ni
4	Cover	PA 9T+33%GF	Color: black
3	Housing	PA 9T+33%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 30u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

△			
△	2023/04/09	Changed the contact current voltage	Jack Chen
△	2021/04/07	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	SDR pitch 0.8mm female 26pin right angle				PART NO.	B06-026611KA-01	
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2021/04/07	Huangmei	Jack Chen		B06-020
lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770			