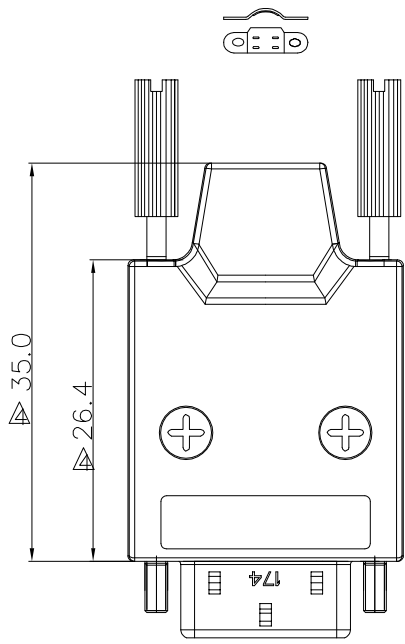
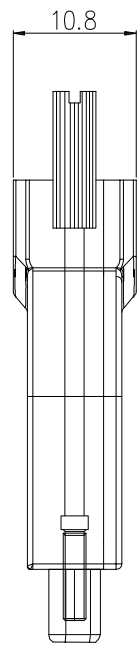
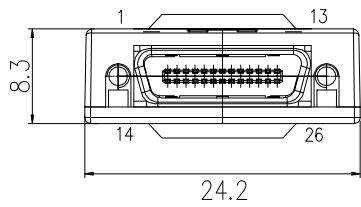
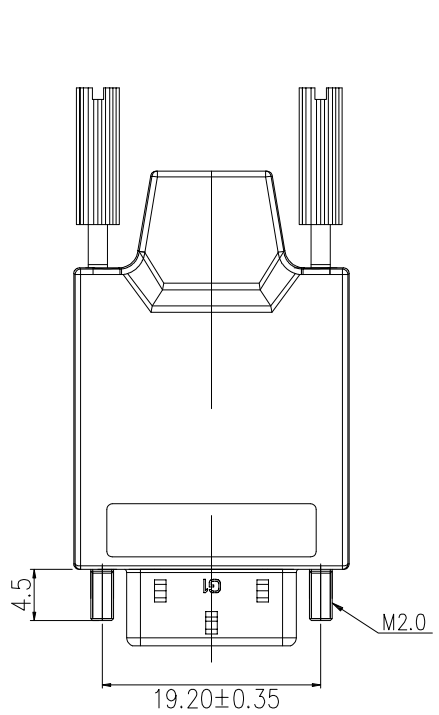



Contact current voltage: 125V AC
△ Current rating: 0.5A
Insulation resistance: 1000MΩ Min
Withstanding voltage: 350V AC
Contact resistance: 70mΩ Max
Temperature range: -45°C~+105°C
ROHS compliant

7	Cable clipper	SPCC	Plating: Ni
6	Hood	Zinc alloy	Plating: Ni
5	Screw	Steel	Plating: Ni
4	Cover	LCP+G.F.15% (UL 94V-0)	Color: black
3	Housing	LCP+G.F.15% (UL 94V-0)	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: 3u" Solder area: Sn Under-plating: Ni

Item	Desc.	Material	Remarks
NAME:	SDR 26P pitch 0.8mm male solder assembly type, zinc alloy hood	PART NO.	B06-026311CJ-A1
REV:	E	UNIT:	mm
SCALE:	N:1	DATE:	2020/06/05
DRW BY	Huangmei	CHK BY	Jack Chen
APP BY		DRAWING NO.	B06-023

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL: 0769-85181660 85181770

△	2023/04/09	Changed the contact current voltage	Jack Chen
△	2020/10/23	Added dimension marking	Jack Chen
△	2020/06/05	First edition release	Jack Chen

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

QUALITY SYMBOLS	Tolerance
□: □: CRITICAL MAJOR	x. ±0.80
▽: ▽: ZERO DEFECT S.P.C	.x ±0.50
	.xx ±0.25

