

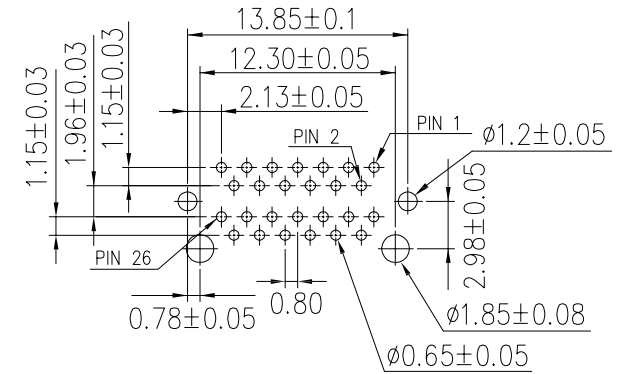


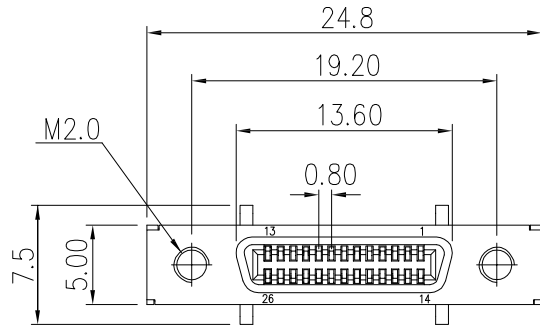


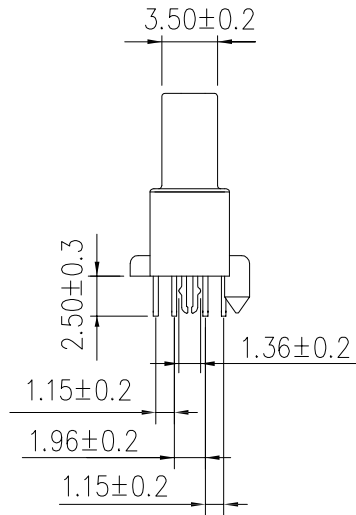

PCB layout

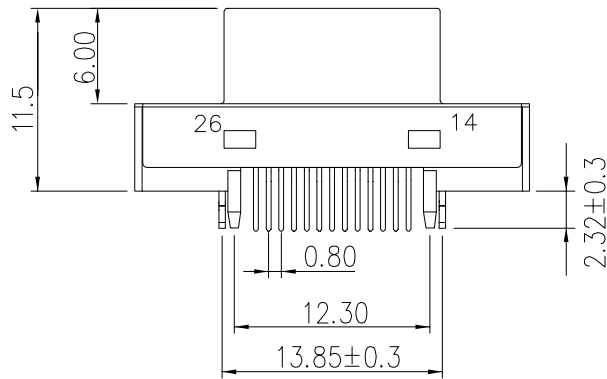

Contact current voltage: 125V AC
△ Current rating: 0.5A
Insulation resistance: 1000MΩ Min
Withstanding voltage: 350V AC
Contact resistance: 70mΩ Max
Temperature range: -45°C~+105°C
ROHS compliant

6	Screws nut	Copper	Palting: Ni
5	Nut	Steel	Palting: Ni
4	Boardlock	Brass	Palting: Sn
3	Shell	Steel	Palting: Ni
2	Housing	PA9T UL94V-0	Color: black
△ 1	Terminal	Phosphor copper	Contact area: Au 30u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remaks

△	2023/04/09	Changed the contact current voltage	Jack Chen
△	2023/03/19	Terminal contact area plating changed from Au 5u" to 30u"	Jack Chen
△	2022/04/22	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□ :	☒ :	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽ :	▽ :	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	SDR pitch 0.8mm female 26pin vertical				PART NO.	B06-026811KA-01		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2022/04/22	Huangmei	Jack Chen		B06-029	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			