


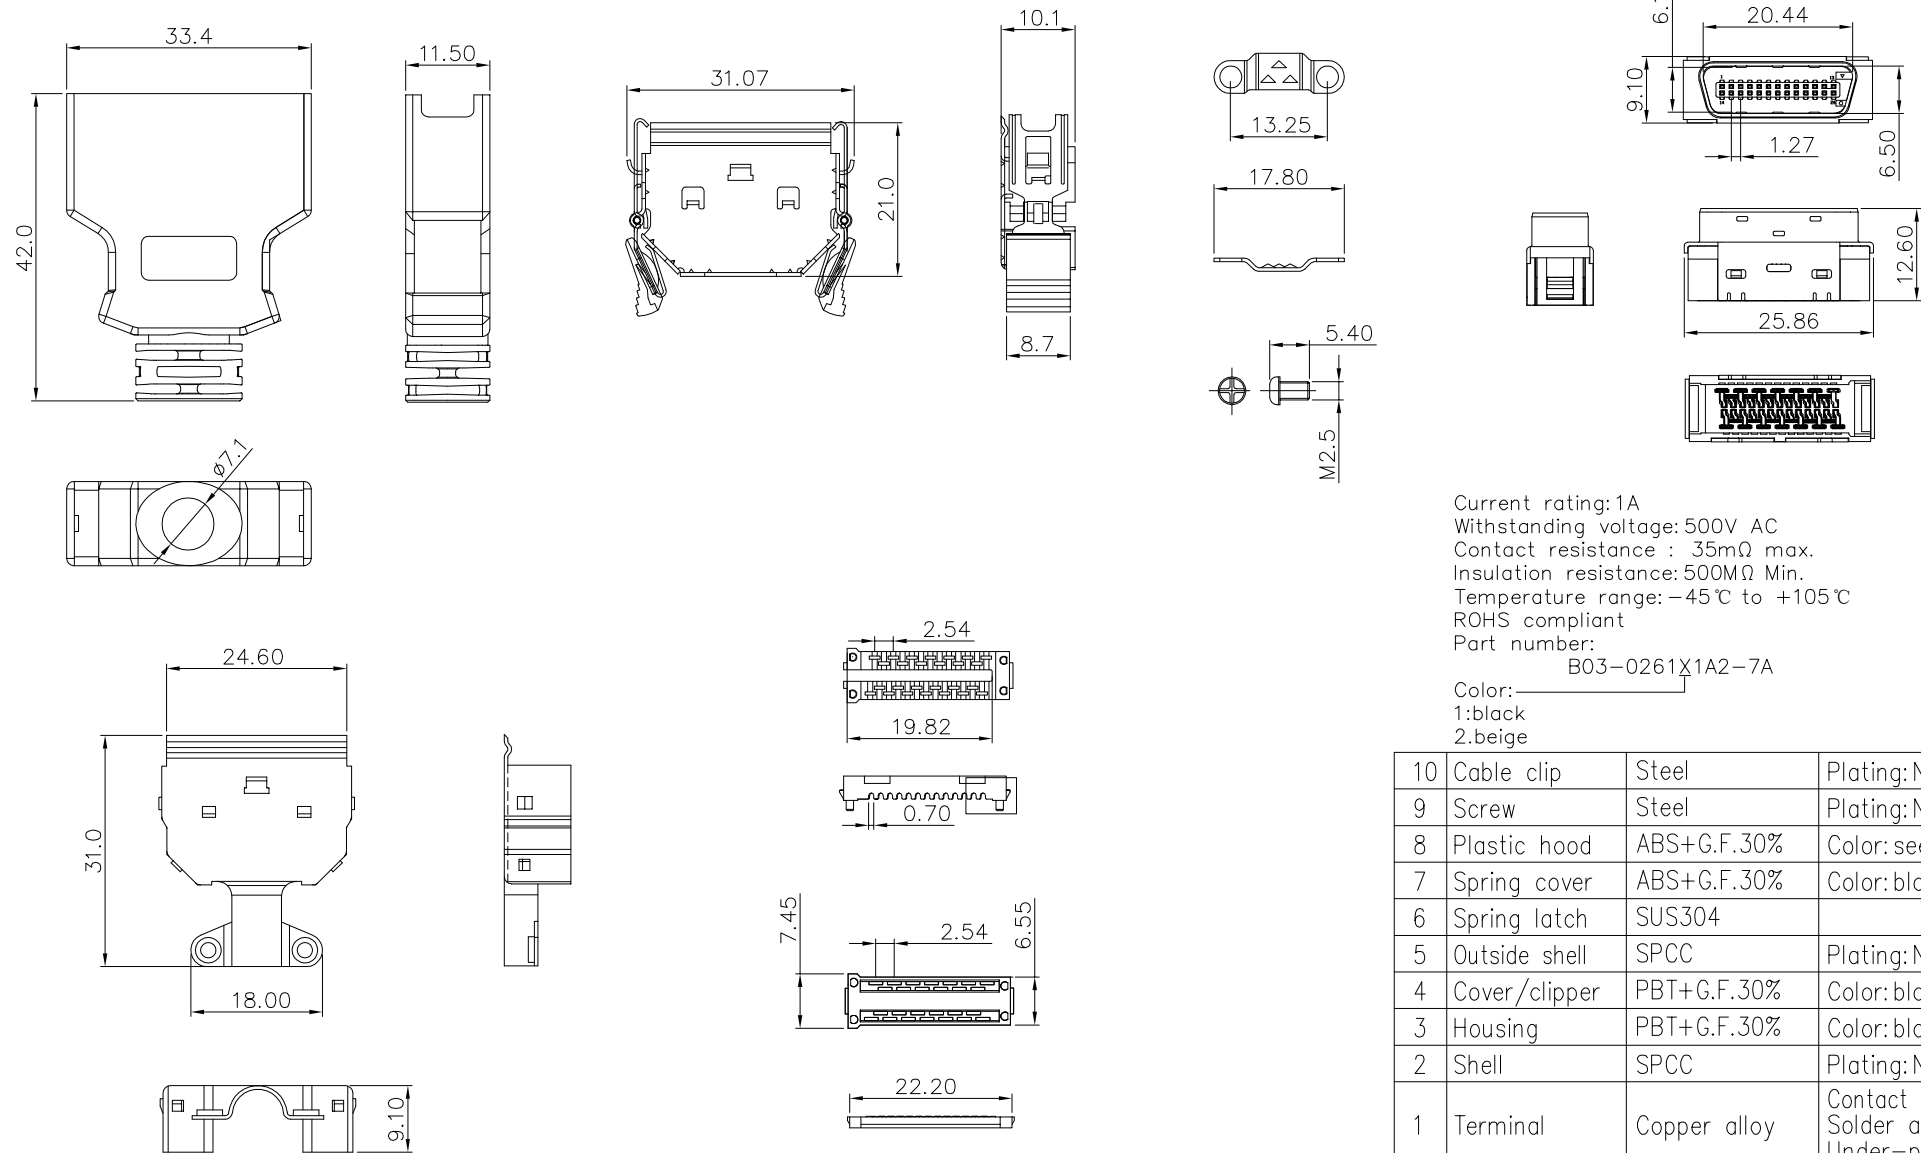

Current rating:1A
Withstanding voltage:500V AC
Contact resistance : 35mQ max.
Insulation resistance:500MΩ Min.
Temperature range:-45℃ to +105℃
ROHS compliant
Part number:

Part number:
B03-0261X1A2-7A

Color:—
1:black
2.beige

10	Cable clip	Steel	Plating: Ni
9	Screw	Steel	Plating: Ni
8	Plastic hood	ABS+G.F.30%	Color: see part no.
7	Spring cover	ABS+G.F.30%	Color: black
6	Spring latch	SUS304	
5	Outside shell	SPCC	Plating: Ni
4	Cover/clipper	PBT+G.F.30%	Color: black
3	Housing	PBT+G.F.30%	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Ni Under-plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance	NAME:		SCSI(HPCN) 26pin male IDC,plastic hood with spring latch(3M substitute)			PART NO.	B03-0261X1A2-7A	
	2021/12/17	Add hood color	Carl Hu	: :	x. ±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	2018/10/22	First edition release	King Zhou	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2018/10/22	Yugong	Carl Hu		B03-086
				: :	.xx ±0.25	东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770							
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C									
8	7	6	5	4	3	2		1					