
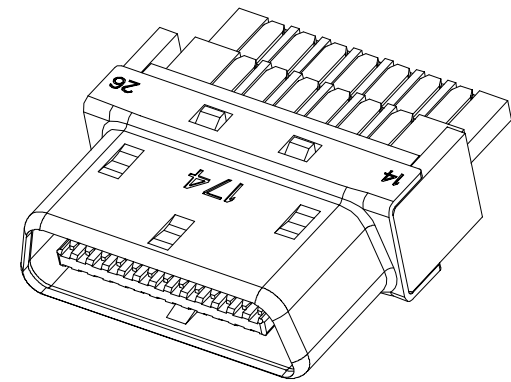


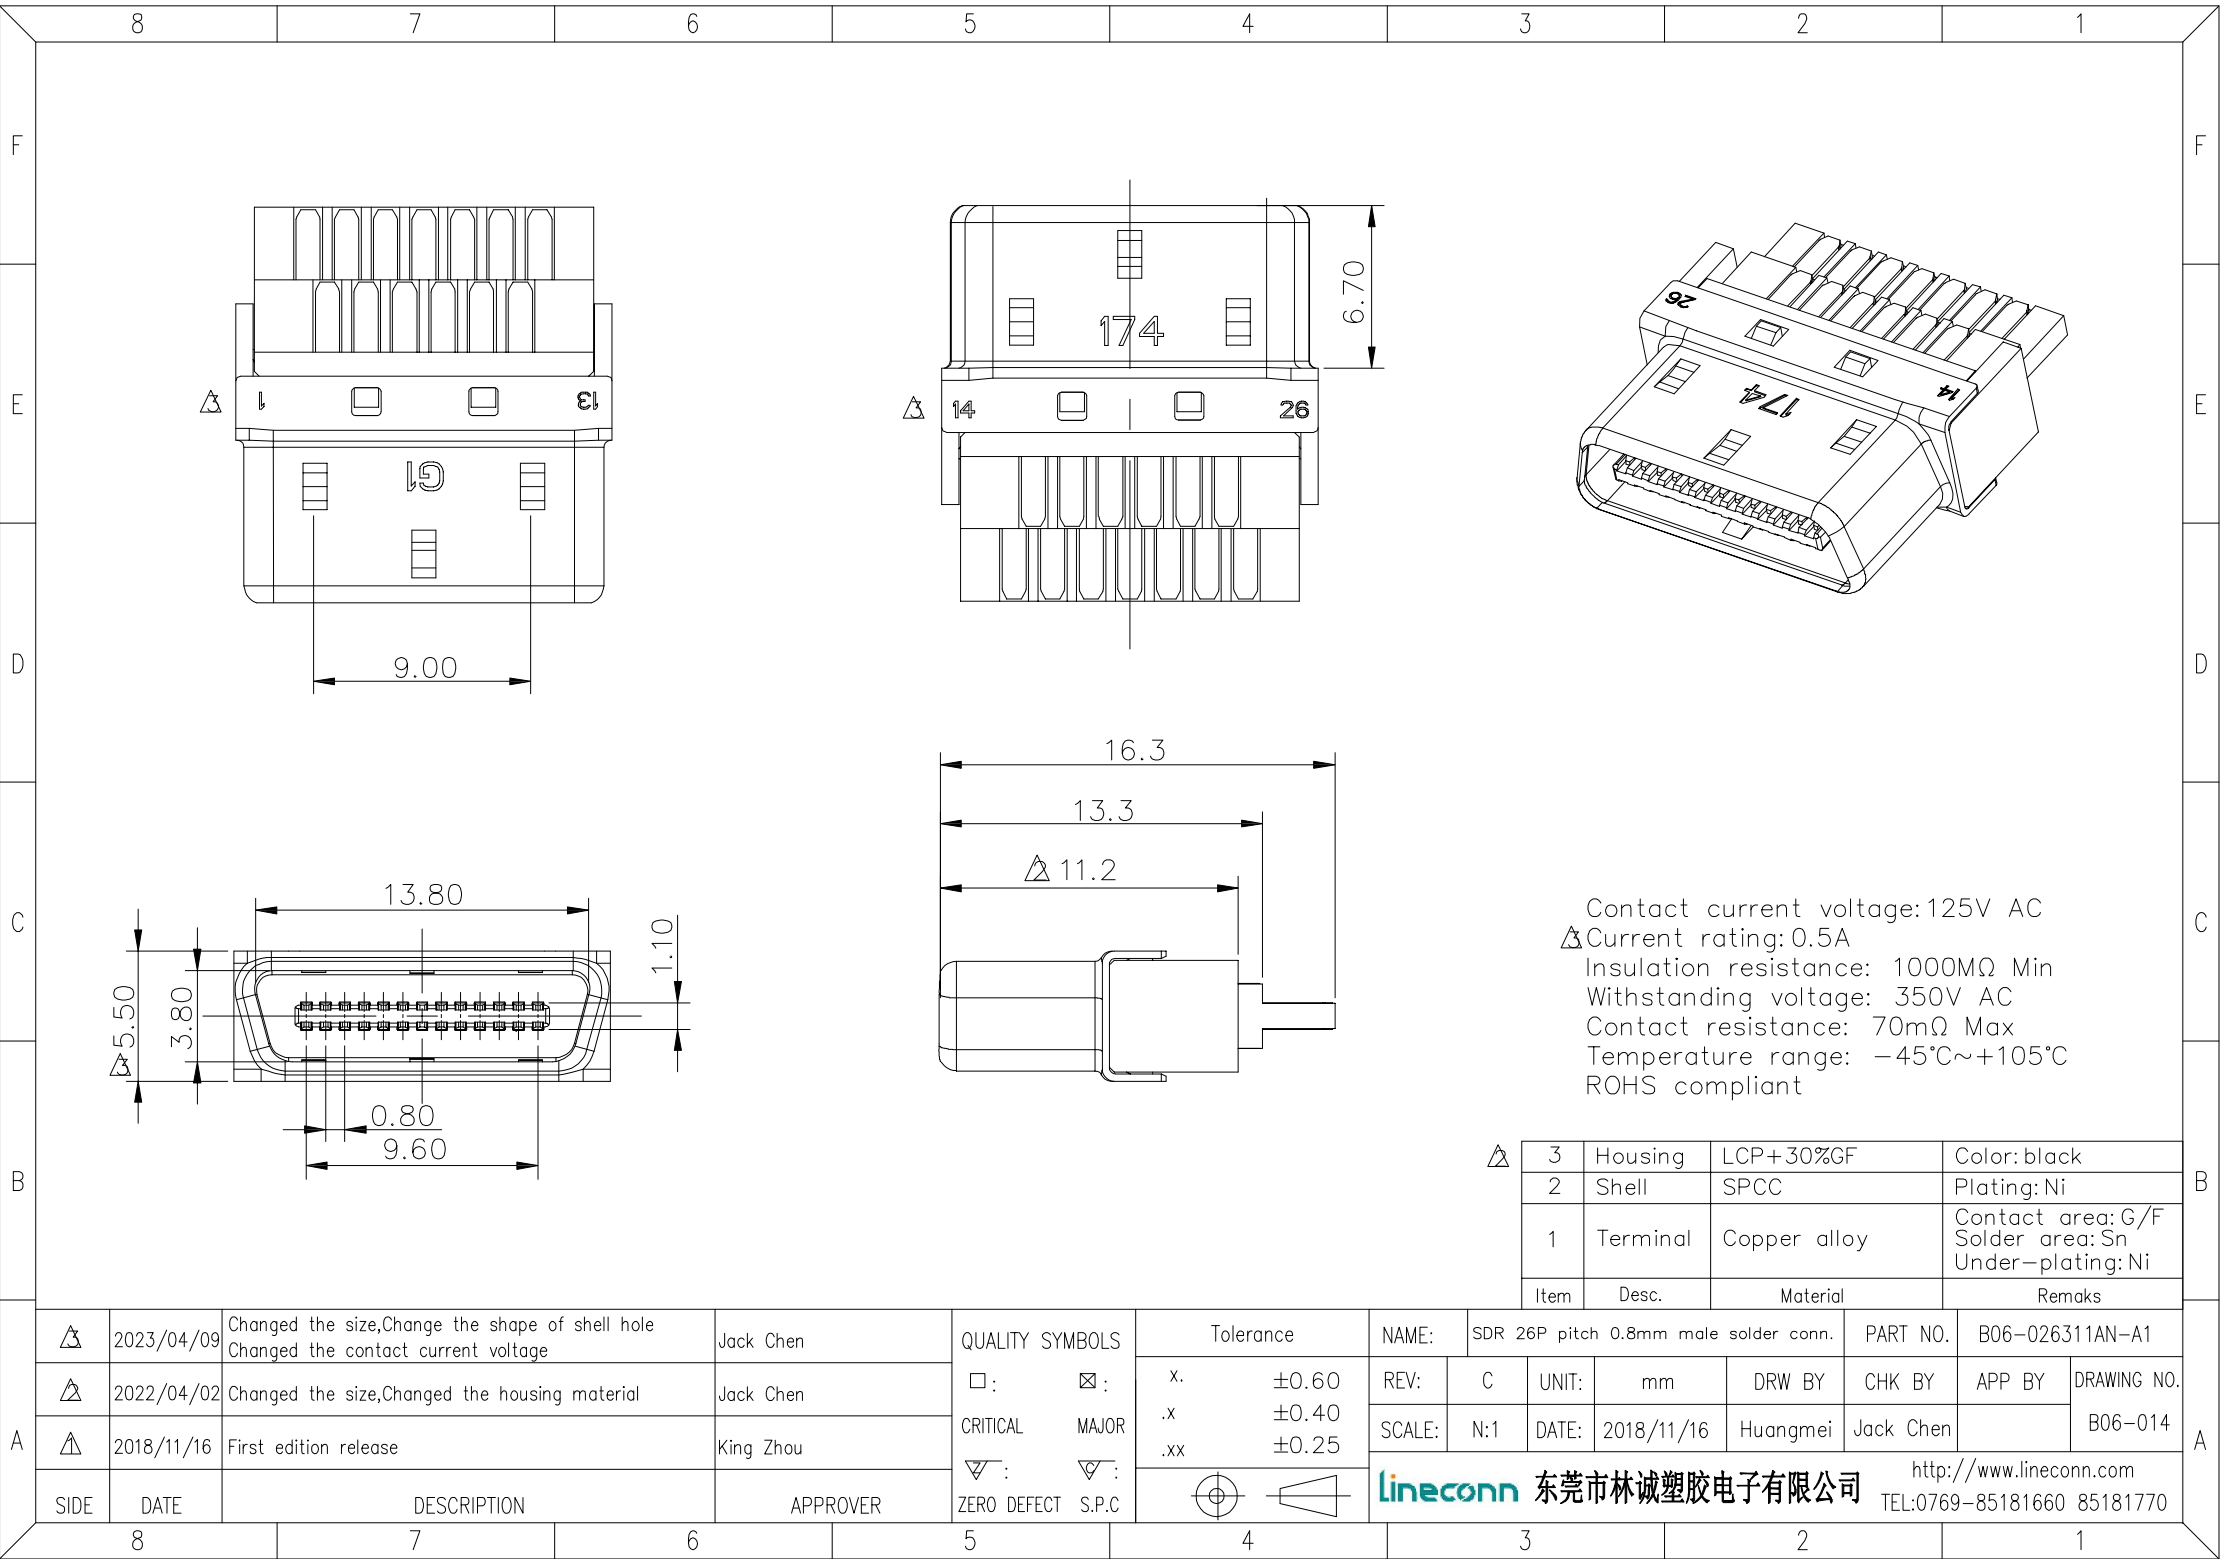

Contact current voltage:125V AC
△Current rating:0.5A
Insulation resistance: 1000MΩ Min
Withstanding voltage: 350V AC
Contact resistance: 70mΩ Max
Temperature range: -45℃~+105℃
ROHS compliant

△	3	Housing	LCP+30%GF	Color: black
	2	Shell	SPCC	Plating: Ni
	1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
	Item	Desc.	Material	Remarks

A		2023/04/09	Changed the size,Change the shape of shell hole Changed the contact current voltage	Jack Chen	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance		NAME:	SDR 26P pitch 0.8mm male solder conn.				PART NO.	B06-026311AN-A1	
		2022/04/02	Changed the size,Changed the housing material	Jack Chen		x. ±0.60	REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B06-014	
		2018/11/16	First edition release	King Zhou		.x ±0.40	SCALE:	N:1	DATE:	2018/11/16	Huangmei	Jack Chen			
						.xx ±0.25									
	SIDE	DATE	DESCRIPTION			APPROVER			lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770						
8		7		6		5		4		3		2		1	