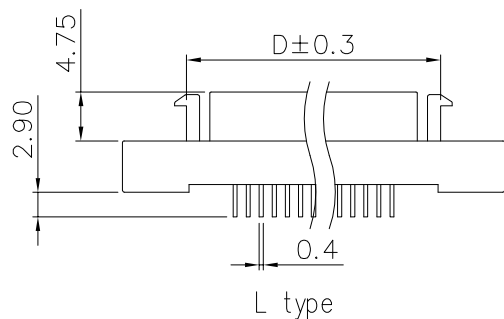
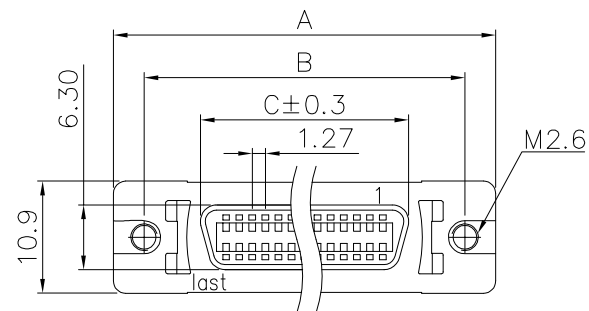


No.of contacts:	A	B	C	D
26	37.2	31.2	20.25	24.70
36	43.5	37.6	26.60	31.00
50	52.6	46.5	35.40	40.10
68	64.0	57.9	46.93	51.00

Current rating: 1A
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -55℃ to +125℃
ROHS compliant

Part number:

B03-0XXF18EN-X X

No.of contacts:

26: 26P

36: 36P

50: 50P

68: 68P

PCB mounting:

A: 1.0mm(for PCB 1.2mm)

B: 1.4mm(for PCB 1.6mm)

Bracket finishes:

L: latch bracket

S: screw bracket

3	Housing	PBT+G.F.30% (UL 94V-0)	Color: black
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni

Item	Desc.	Material	Remark
------	-------	----------	--------

2021/05/17 Change part number

Carl Hu

QUALITY SYMBOLS

Tolerance

NAME:

SCSI(HPCN) female clip type for PCB, with support stand

PART NO.

B03-0XXF18EN-XX

2014/01/04 Change tolerance

King Zhou

CRITICAL MAJOR

x. ±0.60

REV: D

UNIT: mm

DRW BY

CHK BY

APP BY DRAWING NO.

2013/11/09 First edition release

King Zhou

ZERO DEFECT S.P.C

.x ±0.40

SCALE: N:1

DATE: 2013/11/09

Yugong

Carl Hu

B03-058

SIDE DATE DESCRIPTION

APPROVER

ZERO DEFECT S.P.C

.xx ±0.25

LINECONN

东莞市林诚塑胶电子有限公司

http://www.lineconn.com

TEL:0769-85181660 85181770