


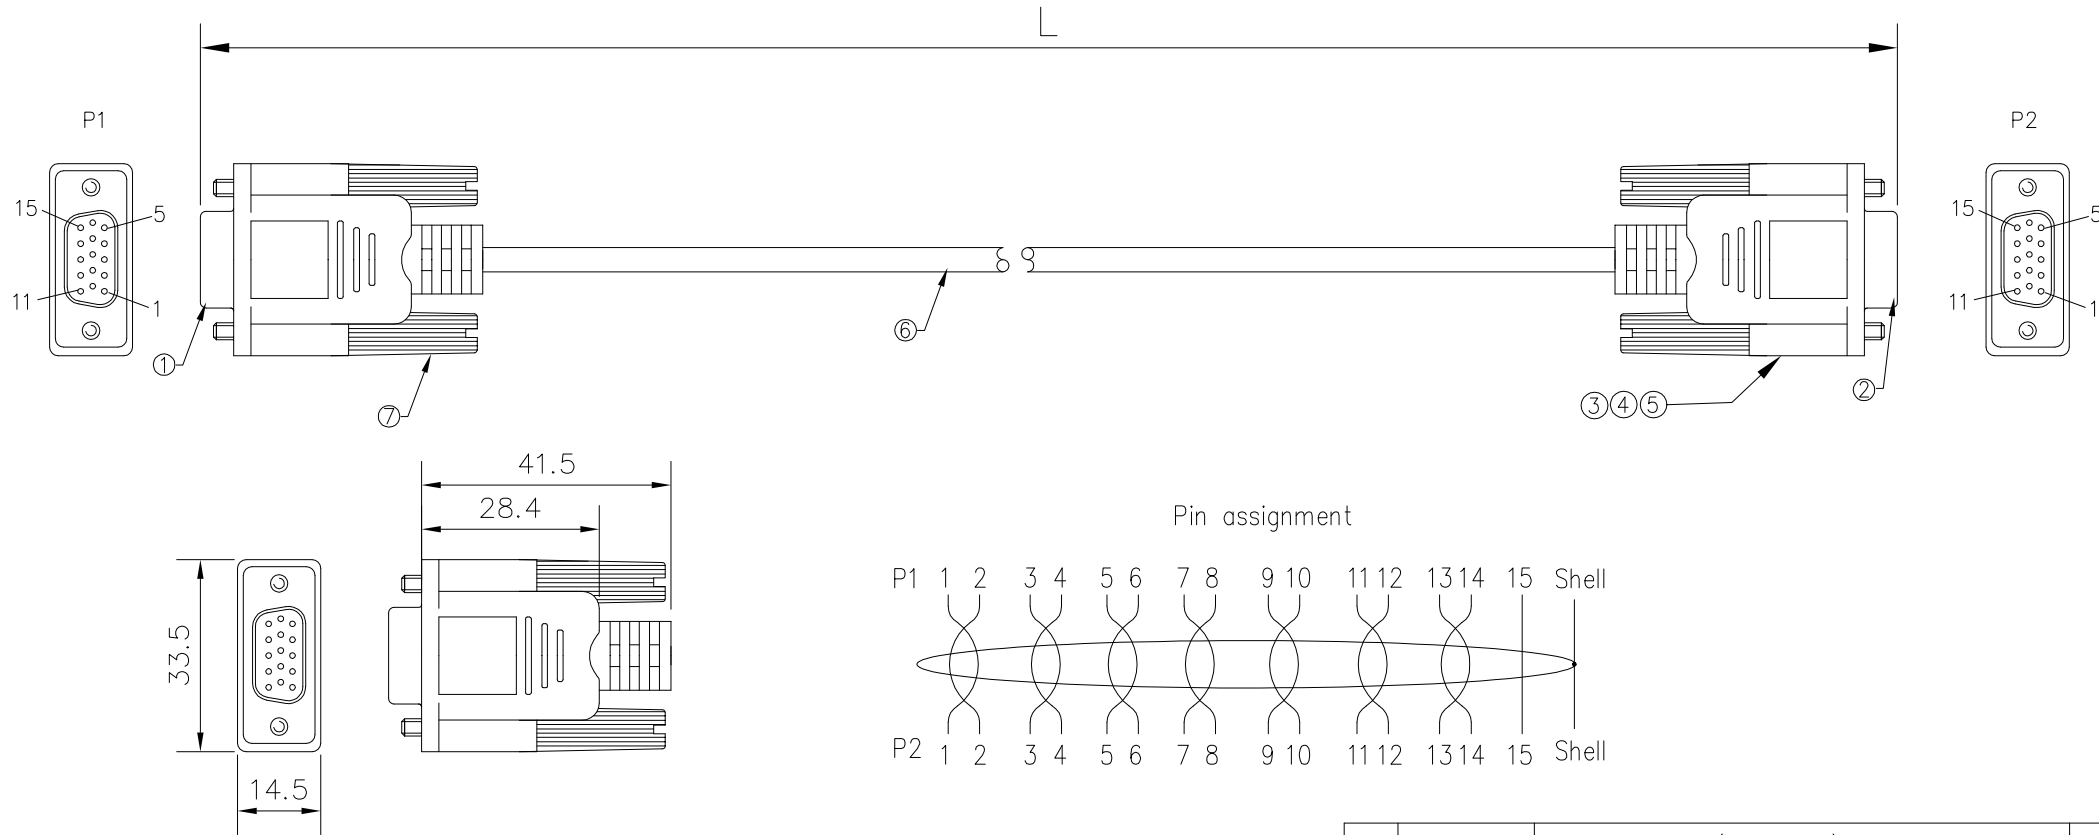

Notes:

- 1.Electrical test:100% open,short&miss wire test.
- 2.Conductor resistance:5 ohms max.
- 3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
- 4.ROHS compliant
- 5.Part number description: A04-01521XXX-04,
XXX:001=length:10cm

7	Screw	Screw 4-40# Ni(Q24 black)	4pcs
6	Cable	24AWG*8P+AB,PVC jacket,color:black,OD 7.8mm	NA
5	Copper foil	Copper foil	NA
4	Over mold	45P PVC color: black	NA
3	Inside mold	PE	NA
2	Connector	HD.D-SUB 15pin female solder,black	1pcs
1	Connector	HD.D-SUB 15pin female solder,black	1pcs
Item	Part name	Description	Qty

△			
△			
△	2024/12/24	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	Length(mm)	Tolerance(mm)
		300~2000	±50
CRITICAL	MAJOR	2001~5000	±100
▽:	▽:	5001~	±150
ZERO DEFECT	S.P.C		

NAME:		HD.D-SUB 15pin female to female cable			PART NO.		A04-01532XXX-04	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	NONE	DATE:	2024/12/24	Yugong	Carl Hu		A04-030	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			