
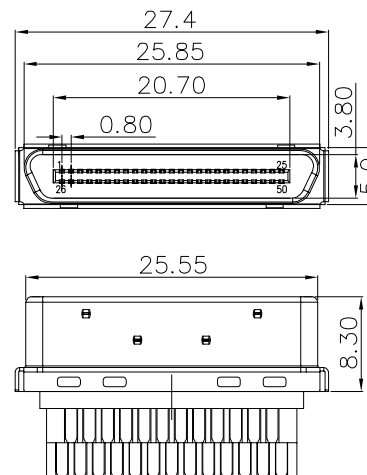
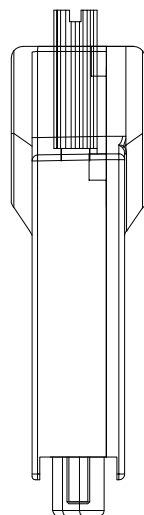
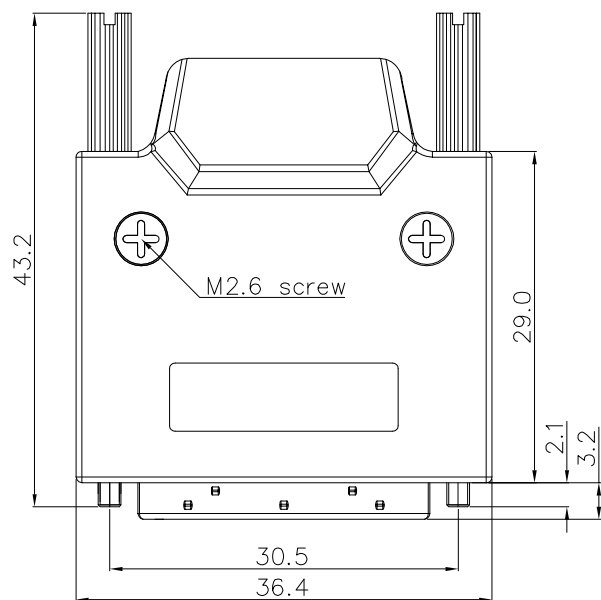
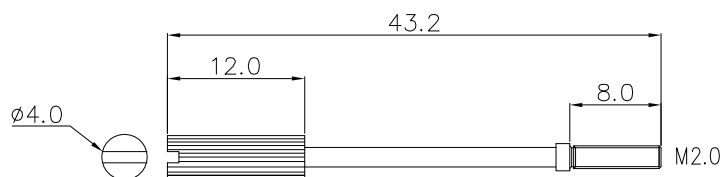


Current rating: 1A
 Voltage rating: 30V AC(rms)
 Withstanding voltage: 250V AC
 Contact resistance : 50mΩ max.
 Insulation resistance: 500MΩ Min.
 Temperature range: -45℃ to +105℃
 ROHS compliant

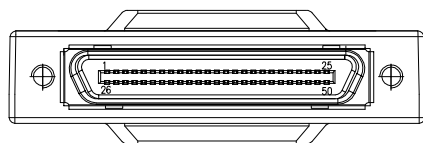

8	Cable clip	SPCC	Plating: Ni
7	M2.0 screw	Steel	Plating: Ni
6	M2.6 screw	Steel	Plating: Ni
5	Hood	Zinc alloy	Plating: Ni
4	Cover	LCP+G.F.30%	Color: black
3	Housing	LCP+G.F.30%	Color: black
2	Sheel	Spcc	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au 3u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance		NAME:		VHDCI(pitch 0.8mm) 50pin male solder,zinc alloy hood with screw				PART NO.		B06-050311CJ-A1	
				: :	x.	±0.80	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B06-025		
	2020/09/26	First edition release	Jack Chen	CRITICAL MAJOR	.x	±0.50	SCALE:	N:1	DATE:	2020/09/26	Huangmei	Jack Chen				
SIDE	DATE	DESCRIPTION	APPROVER	: :			lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL: 0769-85181660 85181770									
				ZERO DEFECT S.P.C												