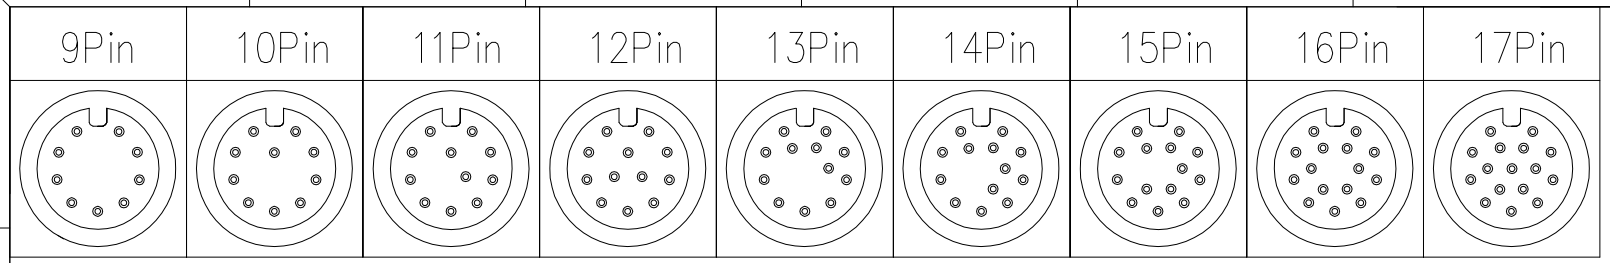





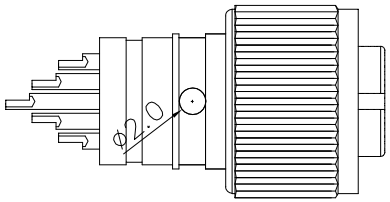

Current rating: 1.5A
Rated voltage: 30V
Contact resistance: 10mΩ Max.
Durability: 500 cycles
Temperature range: −40℃ to +105℃
ROHS compliant
Waterproof rating: IP67
Part No.:
B10−M12AXX41−04
Pin No.:
09: 9pin 10: 10pin
11: 11pin 12: 12pin
13: 13pin 14: 14pin
15: 15pin 16: 16pin
17: 17pin





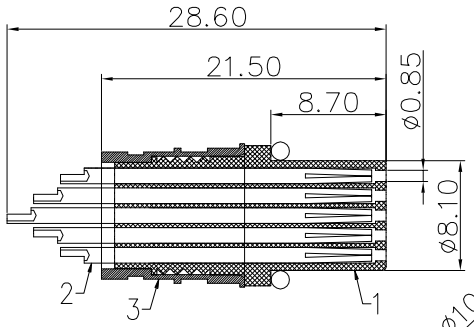



Item	Desc.	Material	Remark
5	O−ring	EPDM	Color: specify
4	Nut	Brass	Plating: Ni
3	Shielded	Brass	Plating: Ni
2	Terminal	Bronze	Plating: Au
1	Housing	PA66+GF	Color: specify

SIDE	DATE	DESCRIPTION	APPROVER
A	2023/01/10	First edition release	Jack Chen

QUALITY SYMBOLS
□: CRITICAL
⊠: MAJOR
▽: ZERO DEFECT
▽: S.P.C

Tolerance	
X.	±0.60
.X	±0.40
.XX	±0.25

NAME:	M12 female solder with shielded				PART NO.	B10−M12AXX41−04	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2023/01/10	Huangmei	Jack Chen		B10−135

lineconn 东莞市林诚塑胶电子有限公司
http://www.lineconn.com
TEL:0769−85181660 85181770