
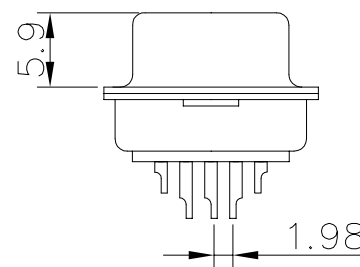


Voltage current rating: 5 AMP.  
 Dielectric withstanding voltage: 1000V AC  
 Insulation resistance: 1000M $\Omega$  Min.  
 Temperature range: -55 $^{\circ}$ C to +125 $^{\circ}$ C  
 ROHS compliant

Part number: B04-1044X1XN-02  
 Housing color: \_\_\_\_\_  
 1: Black  
 5: White  
 Terminal plating: \_\_\_\_\_  
 3: full Au 3u"  
 4: full Au 2u"  
 5: full Au 1u"

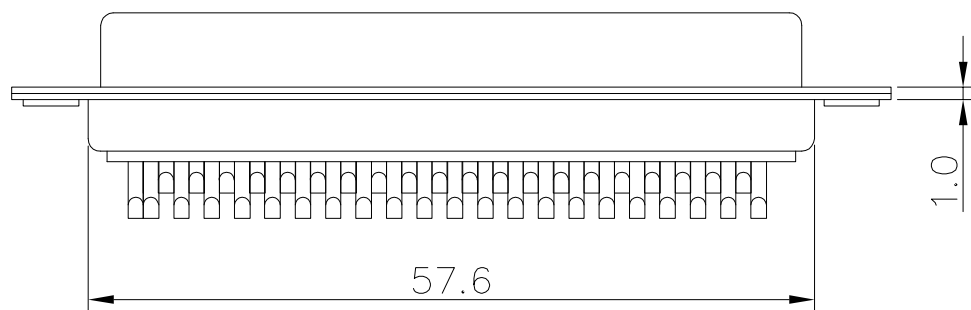

4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT+30%GF	Color: see part no.
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

A	△	2022/01/15	Add terminal plating type	Jack Chen	QUALITY SYMBOLS □:      ☒: CRITICAL MAJOR ▽:      ▽: ZERO DEFECT S.P.C	Tolerance		NAME:	HD.D-SUB 104pin female solder, machined pin			PART NO.	B04-1044X1XN-02		
	△	2021/06/09	Change part number	Jack Chen		x.	±0.60	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B04-022
	△	2014/07/10	First edition release	Jing Li		.x	±0.40	SCALE:	N:1	DATE:	2014/07/10	Huangmei	Jack Chen		
	SIDE	DATE	DESCRIPTION			APPROVER	④	①	lineconn 东莞市林诚塑胶电子有限公司			http://www.lineconn.com TEL:0769-85181660 85181770			
	8	7	6	5	4	3	2	1							