

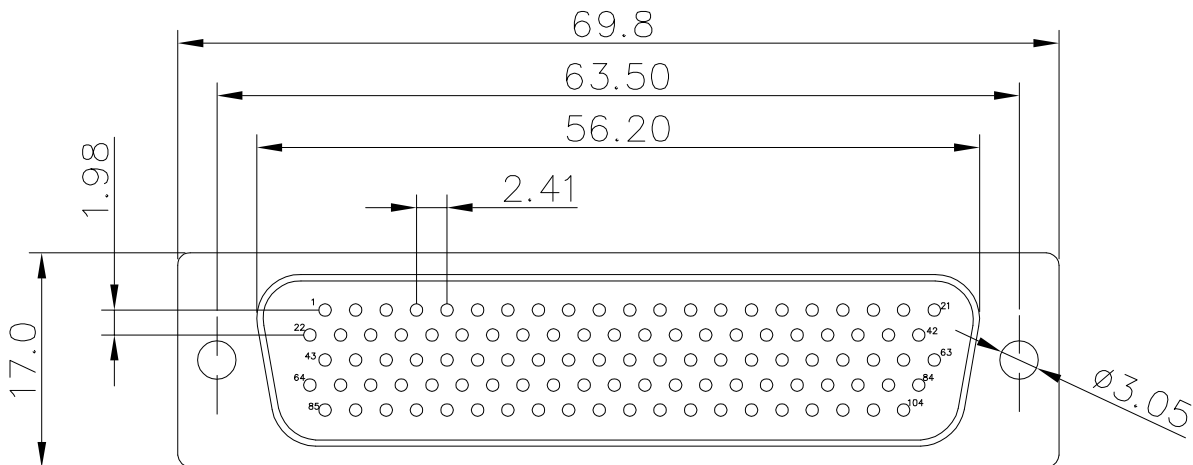


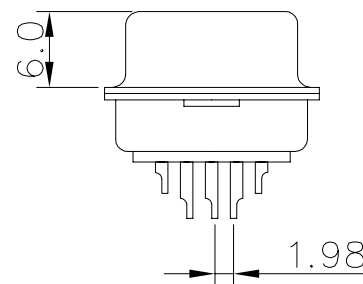

Voltage current rating: 5 AMP.
Dielectric withstanding voltage: 1000V AC
Insulation resistance: 1000M Ω Min.
Temperature range: -55 $^{\circ}$ C to +125 $^{\circ}$ C
ROHS compliant

Part number:
B04-1043X1XN-02

Housing color: _____
1: Black
5: White
Terminal plating: _____
3: full Au 3u"
4: full Au 2u"
5: full Au 1u"

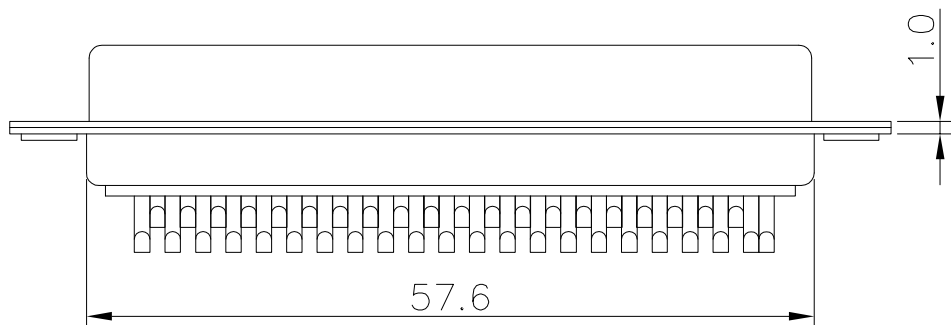

4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT+30%GF	Color: see part no.
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

△	2022/01/15	Add terminal plating type	Jack Chen
△	2021/06/09	Change part number	Jack Chen
△	2014/07/09	First edition release	Jing Li

QUALITY SYMBOLS
□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	HD.D-SUB 104pin male solder, machined pin				PART NO.	B04-1043X1XN-02	
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2014/07/09	Huangmei	Jack Chen		B04-021

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL:0769-85181660 85181770

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------