
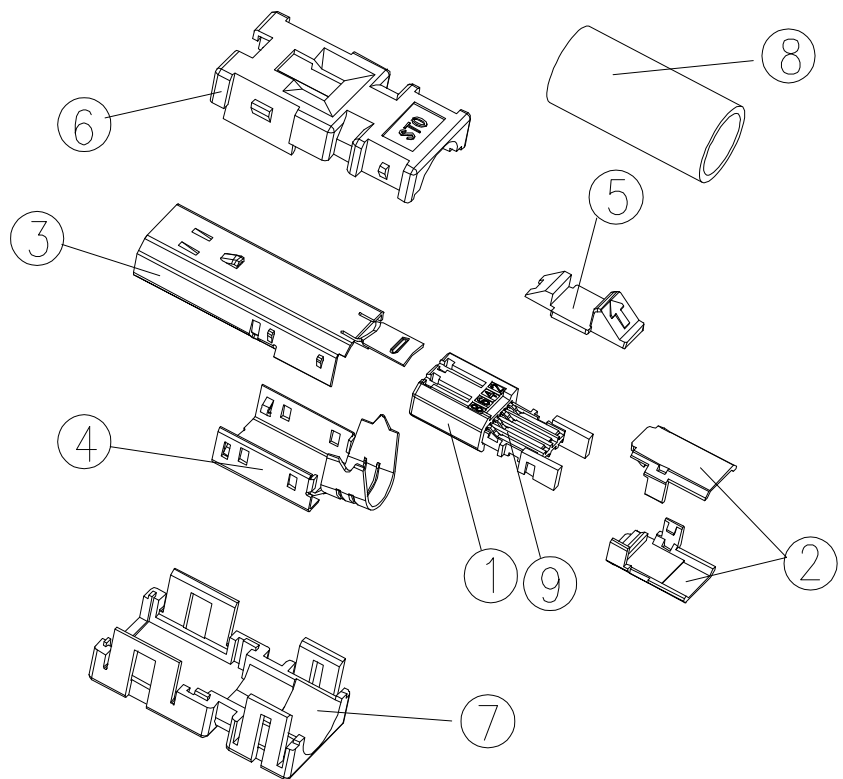
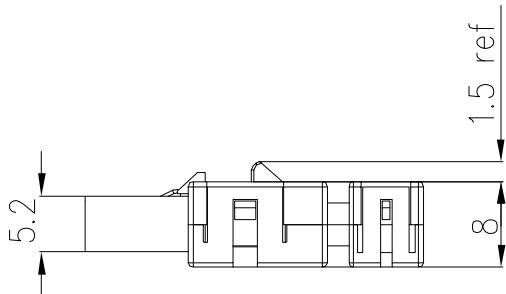



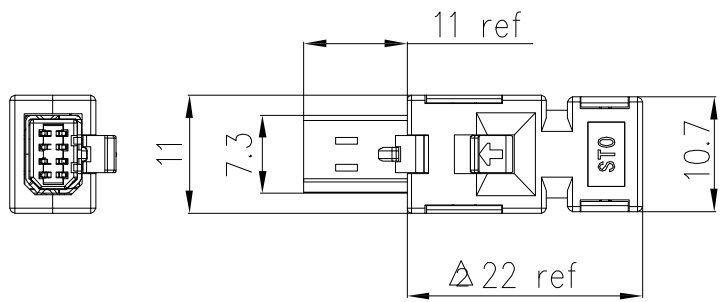

Circuit no.

Current rating: 0.5A
Withstanding voltage: 60V
Temperature range: -45℃ to +85℃
ROHS compliant
Suitable for 24awg-28awg cable

9	Housing	PBT UL94V-0	Color: black
8	Heat shrin. tube	Cross-linked polyolefin	Color: black
7	Hood	PBT UL94V-0	Color: black
6	Hood	PBT UL94V-0	Color: black
5	Lock ejector	PBT UL94V-0	Color: black
4	Shell	Steel	Plating: Ni
3	Shell	Steel	Plating: Ni
2	Housing cover	PBT UL94V-0	Color: black
1	Terminal	Copper alloy	Plating: Au
Item	Desc.	Material	Remark

△	2025/11/19	Add electrical performance description	Jack Chen
△	2025/04/03	Cancel copper foil	Jack Chen
△	2021/12/19	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x. ±0.80	
CRITICAL	MAJOR	.x ±0.50	
▽:	▽:	.xx ±0.30	
ZERO DEFECT	S.P.C		

NAME:		Panasonic servo driver X3 plug, DVOPM20025,2013595-1			PART NO.		B01-008311AE-02	
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2021/12/19	Huangmei	Jack Chen		B01-054	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			