


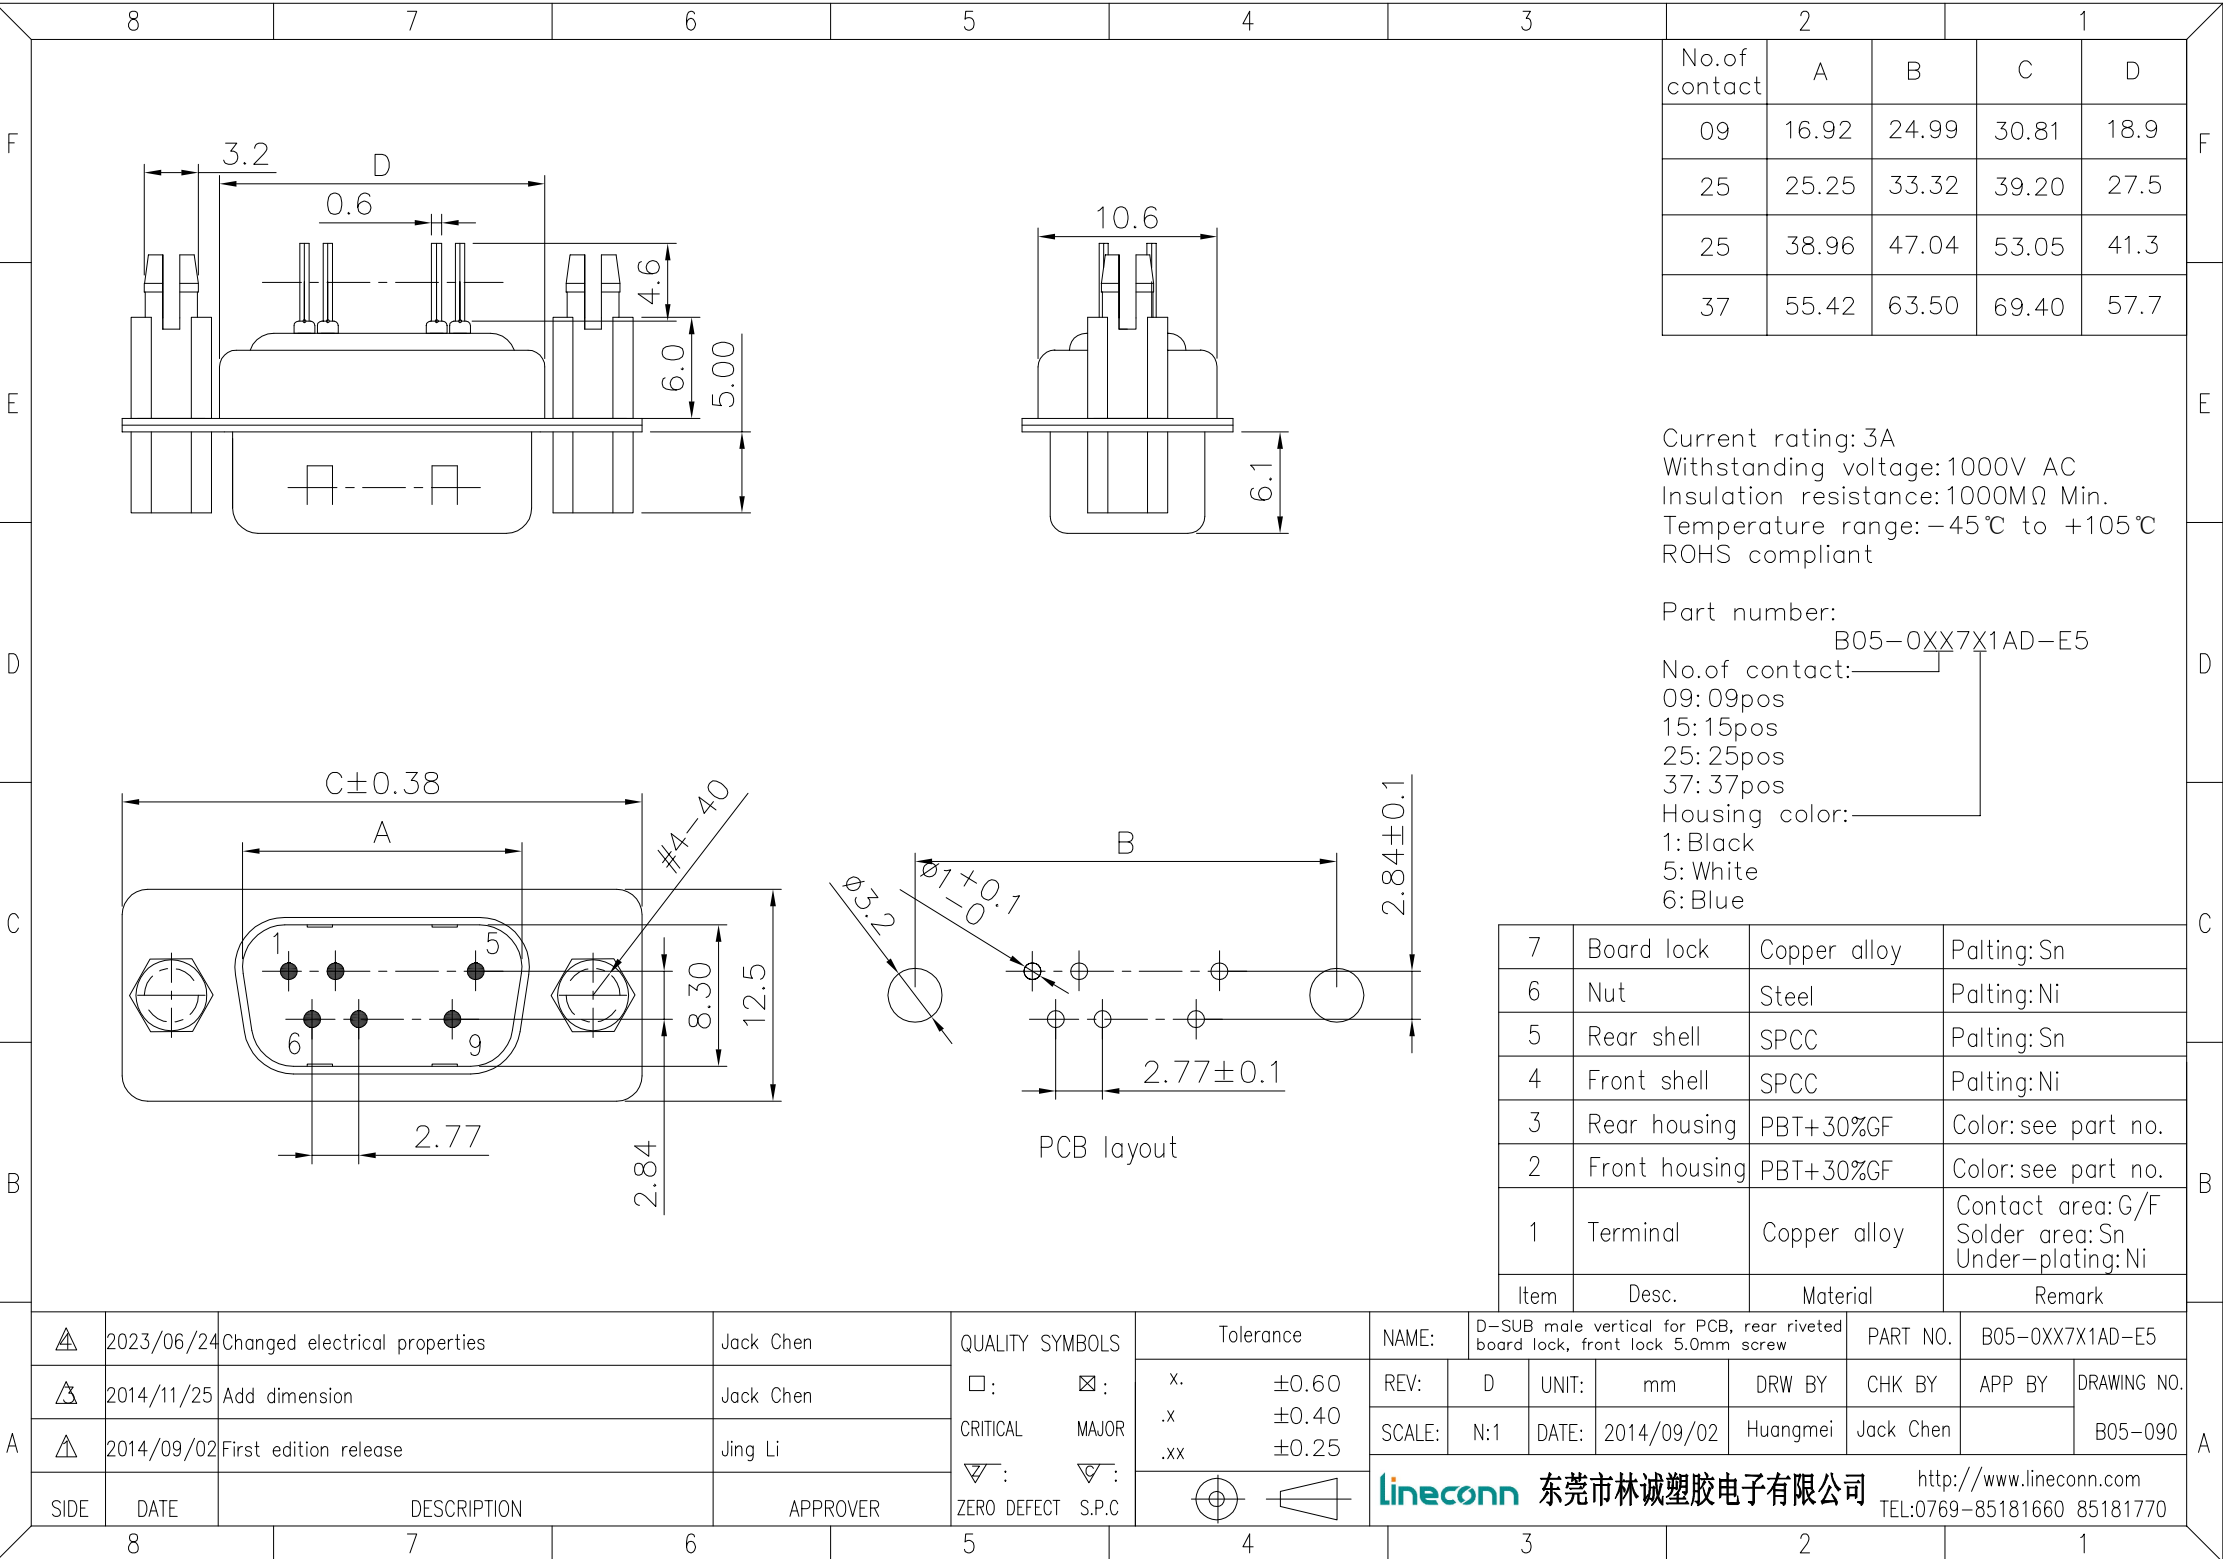

No.of contact	A	B	C	D
09	16.92	24.99	30.81	18.9
25	25.25	33.32	39.20	27.5
25	38.96	47.04	53.05	41.3
37	55.42	63.50	69.40	57.7

Current rating: 3A
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant

Part number:
B05-0XX7X1AD-E5
No.of contact: _____
09: 09pos
15: 15pos
25: 25pos
37: 37pos
Housing color: _____
1: Black
5: White
6: Blue

7	Board lock	Copper alloy	Palting: Sn
6	Nut	Steel	Palting: Ni
5	Rear shell	SPCC	Palting: Sn
4	Front shell	SPCC	Palting: Ni
3	Rear housing	PBT+30%GF	Color: see part no.
2	Front housing	PBT+30%GF	Color: see part no.
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2023/06/24	Changed electrical properties	Jack Chen	QUALITY SYMBOLS	Tolerance	NAME:	D-SUB male vertical for PCB, rear riveted board lock, front lock 5.0mm screw				PART NO.	B05-0XX7X1AD-E5		
△	2014/11/25	Add dimension	Jack Chen	□: ☒:	x. ±0.60	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
△	2014/09/02	First edition release	Jing Li	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2014/09/02	Huangmei	Jack Chen		B05-090	
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C									