
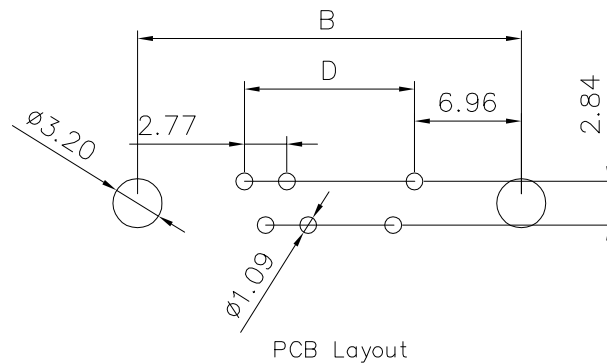
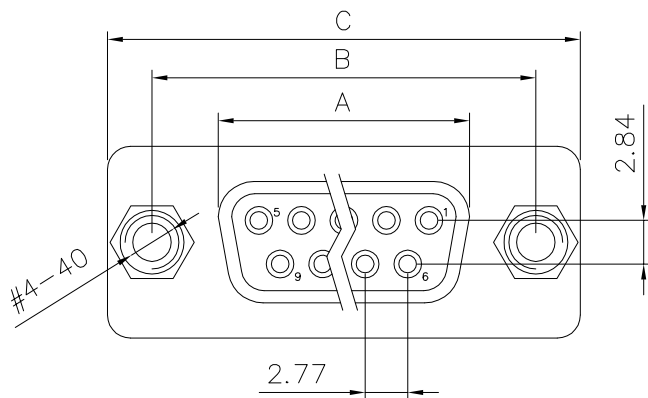
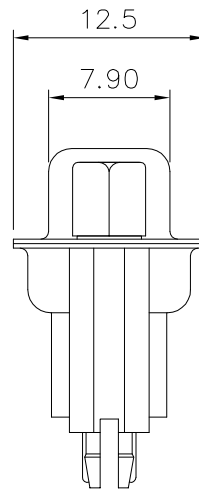


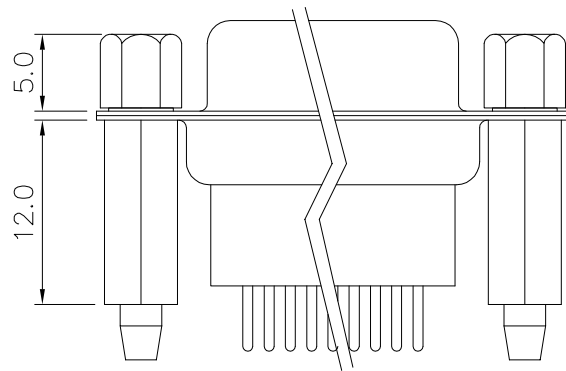

No.of contact	A	B	C	D
09	16.33	24.99	30.81	11.08
15	24.66	33.32	39.20	19.39
25	38.38	47.04	53.05	33.24
37	54.84	63.50	69.40	49.86

Current rating: 3A
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant

Part number:
B05-0XX8X1AD-H5

No.of contact:

09: 09P
15: 15P
25: 25P
37: 37P


Housing color:
1: Black
5: White
6: Blue

7	Board lock	Copper alloy	Palting: Sn
6	Nut	Steel	Palting: Ni
5	Rear shell	SPCC	Palting: Sn
4	Front shell	SPCC	Palting: Ni
3	Rear housing	PBT+30%GF	Color: see part no.
2	Front housing	PBT+30%GF	Color: see part no.
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2022/03/11	Changed electrical properties	Jack Chen
△	2021/06/25	Change part number	Jack Chen
△	2018/05/30	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS
□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25



NAME:		D-SUB female vertical for PCB, rear riveted 12.0mm board lock, front lock nut			PART NO.		B05-0XX8X1AD-H5	
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B05-162	
SCALE:	N:1	DATE:	2018/05/30	Huangmei	Jack Chen			
lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770								