

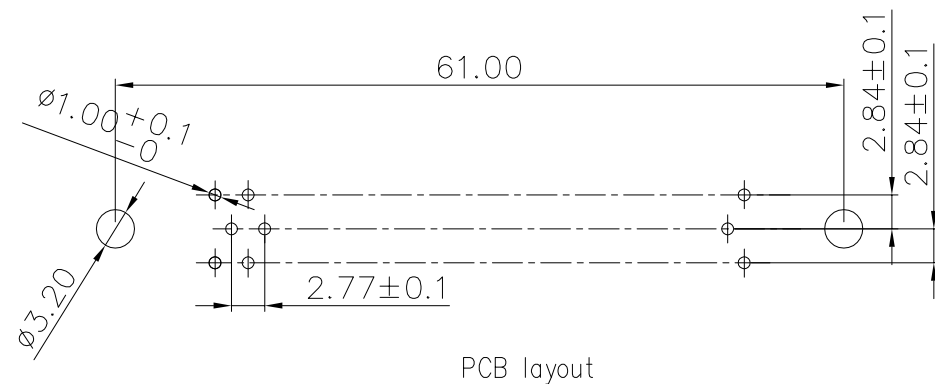
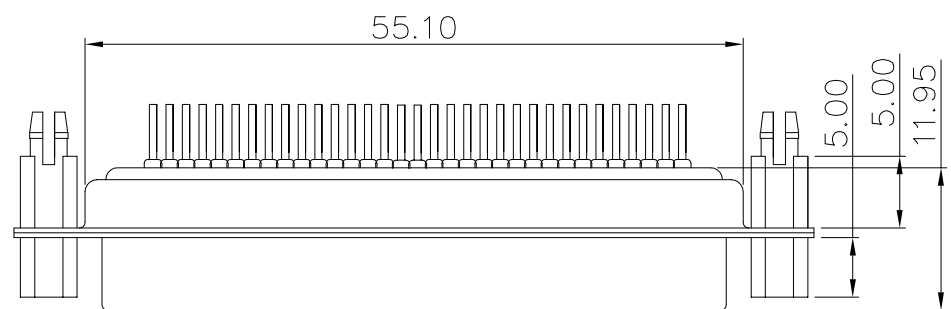


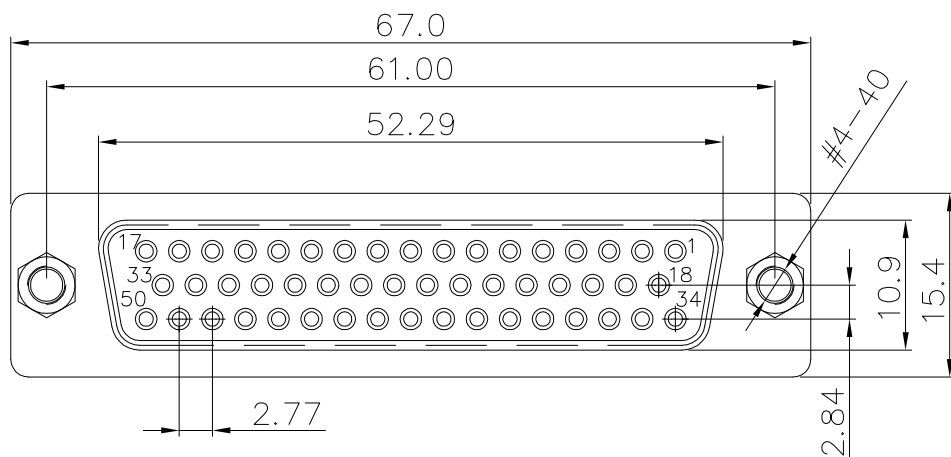

Current rating: 3A
Withstanding voltage: 1000V AC
Insulation resistance: 1000M Ω Min.
Temperature range: -45 $^{\circ}$ C to +105 $^{\circ}$ C
ROHS compliant

Part number: B05-0508X1AD-E5
Housing color: 1: Black
5: White
6: Blue



7	Board lock	Copper alloy	Plating: Sn
6	Nut	Steel	Plating: Ni
5	Rear shell	SPCC	Plating: Sn
4	Front shell	SPCC	Plating: Ni
3	Rear housing	PBT+30%GF	Color: see part no.
2	Front housing	PBT+30%GF	Color: see part no.
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2022/06/24	Change part number	Jack Chen	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance		NAME:		D-SUB 50pin female vertical for PCB, rear riveted 6.0mm board lock, front lock nut				PART NO.		B05-0508X1AD-E5	
△	2014/12/04	Add dimension	Jack Chen		x. ±0.60 .x ±0.40 .xx ±0.25	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.			
△	2014/09/02	First edition release	Jing Li		SCALE:	N:1	DATE:	2014/09/02	Huangmei	Jack Chen		B05-093				
SIDE	DATE	DESCRIPTION	APPROVER		 	lineconn 东莞市林诚塑胶电子有限公司							http://www.lineconn.com TEL:0769-85181660 85181770			