

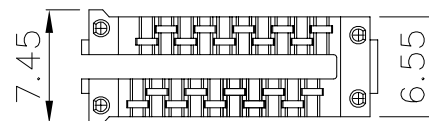
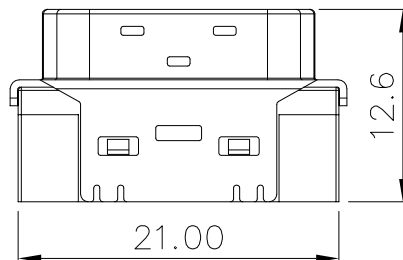
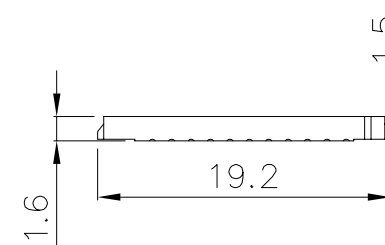
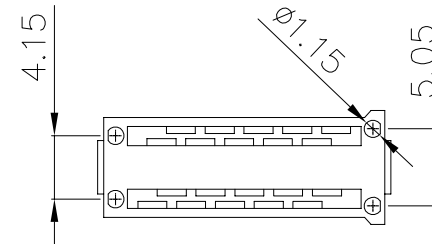


Section: A-A



Current rating: 1A. 30V AC  
 Insulation resistance: 500M $\Omega$ /Min  
 Withstanding voltage: 500V AC/Min  
 Contact resistance: 35m $\Omega$  Max  
 Temperature range: -45°C to +125°C  
 ROHS compliant

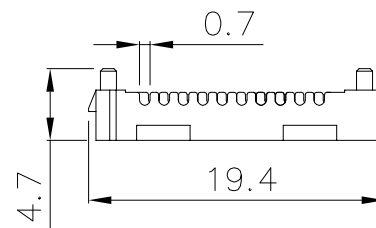

4	Cover	PBT+G.F.30% (UL 94V-0)	Color:black
3	Housing	PBT+G.F.30% (UL 94V-0)	Color:black
2	Shell	SPCC	Plating:Ni
1	Terminal	Phosphor bronze	Contact area:G/F Solder area:Sn Under-plating:Ni
Item	Desc.	Material	Remark

$\Delta$	2021/05/29	Change part number	Jack Chen	
$\Delta$	2016/04/21	First edition release	King Zhou	
SIDE	DATE	DESCRIPTION	APPROVER	
8	7	6	5	4

QUALITY SYMBOLS		Tolerance	
$\square$ :	$\boxtimes$ :	x.	$\pm 0.60$
CRITICAL	MAJOR	.x	$\pm 0.40$
$\nabla$ :	$\nabla$ :	.xx	$\pm 0.25$
ZERO DEFECT	S.P.C		

NAME:	SCSI(HPCN) 20pin male IDC connector (3M substitute)			PART NO.	B03-020111A0-01		
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2016/04/21	Huangmei	Jack Chen		B03-023
				东莞市林诚塑胶电子有限公司 <a href="http://www.lineconn.com">http://www.lineconn.com</a> TEL:0769-85181660 85181770			
8	7	6	5	4	3	2	1