
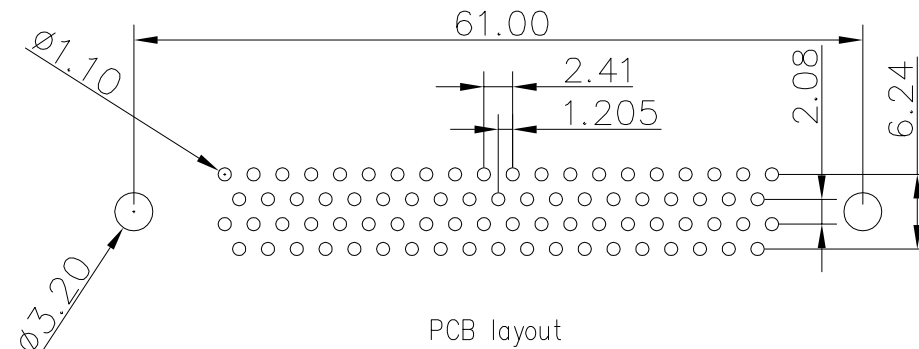
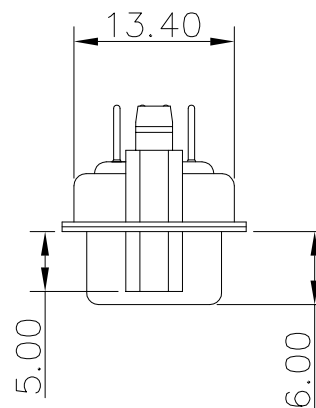
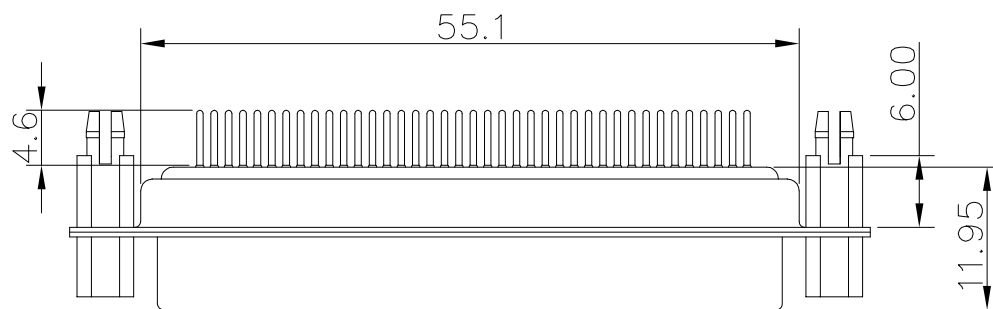


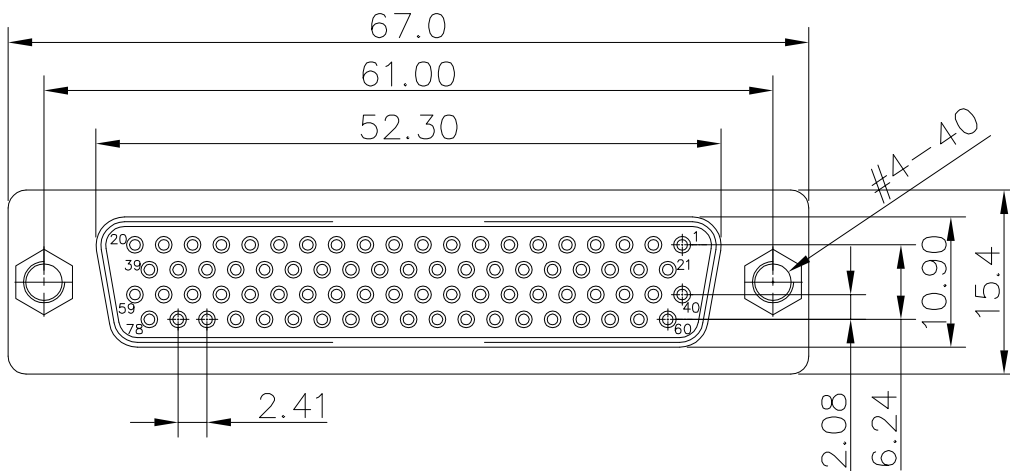

Current rating: 3A
Withstanding voltage: 1000V AC
Insulation resistance: 1000M Ω Min.
Temperature range: -45 $^{\circ}$ C to +105 $^{\circ}$ C
ROHS compliant


Part number: B04-0788X1AD-E5
Housing color: _____
1: Black
5: White
6: Blue

7	Board lock	Copper alloy	Palting: Sn
6	Nut	Steel	Palting: Ni
5	Rear shell	SPCC	Palting: Sn
4	Front shell	SPCC	Palting: Ni
3	Rear housing	PBT+30%GF	Color: see part no.
2	Front housing	PBT+30%GF	Color: see part no.
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/06/11	Change part number	Jack Chen
△	2014/12/04	Add dimension	Jack Chen
△	2014/09/05	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS
□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance	
.x.	±0.60
.x	±0.40
.xx	±0.25



NAME:		HD.D-SUB 78pin female vertical for PCB, rear riveted 6.0mm board lock, front lock nut			PART NO.		B04-0788X1AD-E5	
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2014/09/05	Huangmei	Jack Chen			B04-032
 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			