

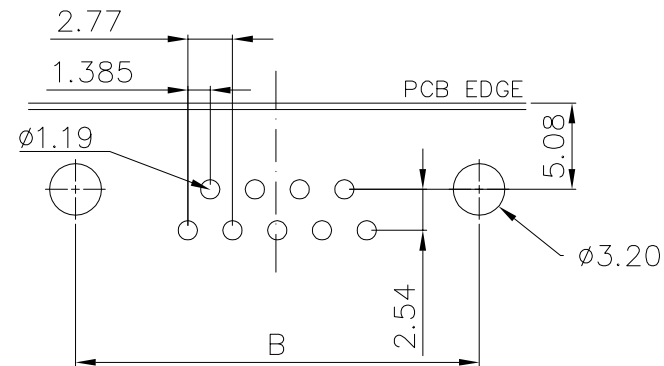
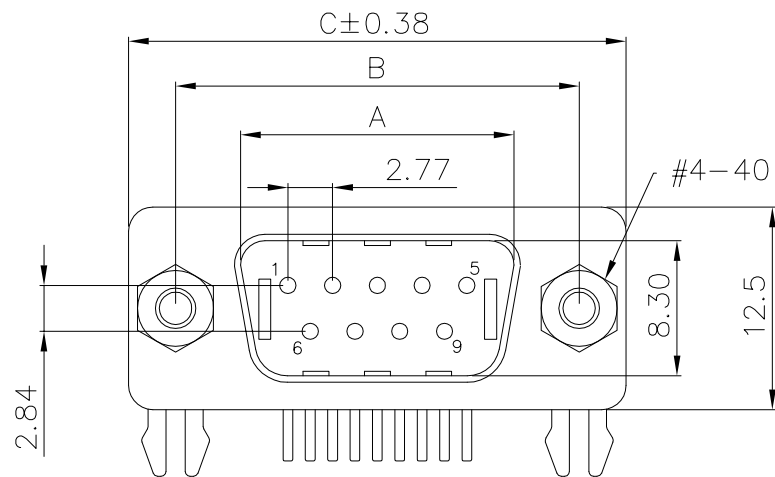


No.of contact	A	B	C
09	16.92	24.99	30.81
15	25.25	33.32	39.20
25	38.96	47.04	53.05

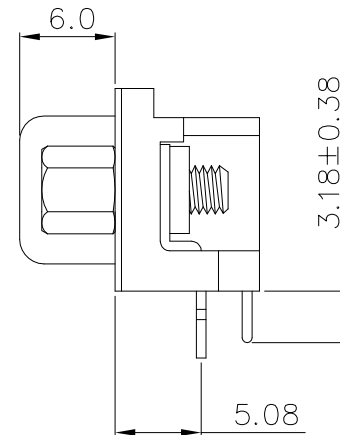

PCB layout


Current rating: 3A
Withstanding voltage: 1000V AC
Insulation resistance: 1000M Ω Min.
Temperature range: -45°C to +105°C
ROHS compliant

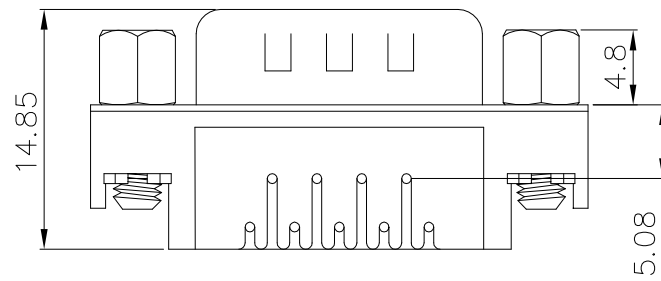

Part number:
B05-AXX511AD-F4

No. of contact: _____
09: 09pin
15: 15pin
25: 25pin

6	Board lock	SPCC	Palting: Sn
5	Nut	Steel	Palting: Ni
4	Shell	SPCC	Palting: Ni
3	Cover	PBT+30%GF	Color: black
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance	NAME:	D-SUB male right angle 5.08mm, riveting board lock,lock 4.8mm nut				PART NO.	B05-AXX511AD-F4			
	2021/06/19	Change part number	Jack Chen	☐ : ☒ :	x. ±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
	2011/03/07	First edition release	Jing Li	CRITICAL MAJOR	.x ±0.40 .xx ±0.25	SCALE:	N:1	DATE:	2011/03/07	Huangmei	Jack Chen		B05-085		
SIDE	DATE	DESCRIPTION	APPROVER	 :  : ZERO DEFECT S.P.C	 	 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770									
8		7		6		5		4		3		2		1	