

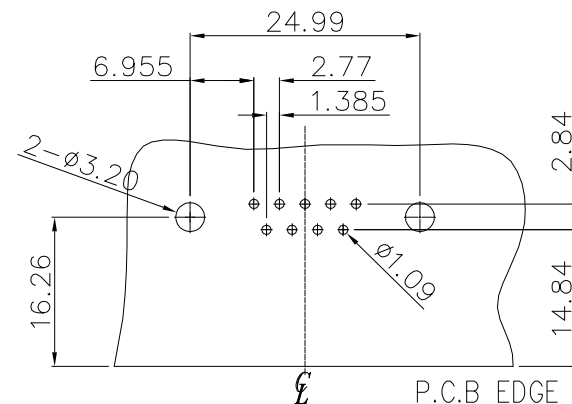
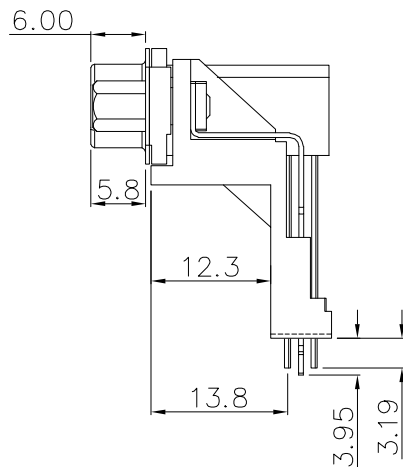
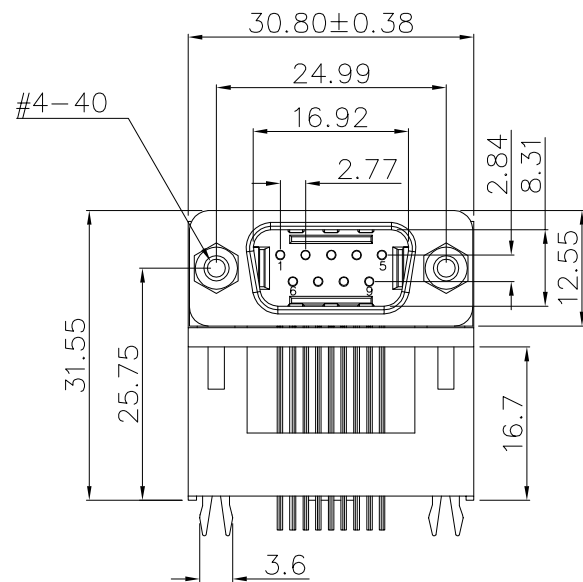


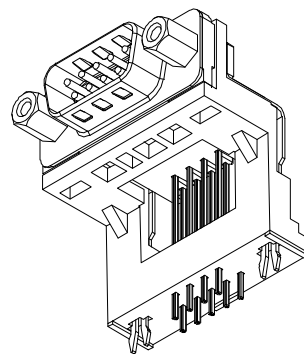

PCB layout

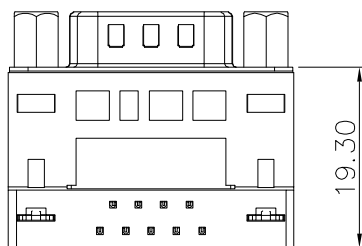

Current rating: 3A
Withstanding voltage: 1000V AC
Insulation resistance: 1000M Ω Min.
Temperature range: -45°C to +105°C
ROHS compliant

6	Board lock	SPCC	Palting: Sn
5	Nut	Steel	Palting: Ni
4	Shell	SPCC	Palting: Ni
3	Cover	PBT+30%GF	Color: black
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

	2021/06/19	Change part number	Jack Chen
	2009/04/14	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
☐ :	☒ :	x. ±0.60	
CRITICAL	MAJOR	.x ±0.40	
		.xx ±0.25	
ZERO DEFECT	S.P.C		

NAME:		D-SUB 9pin male right angle 19.05mm, riveting board lock,lock 5.8mm nut				PART NO.		B05-009531AD-J5	
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
SCALE:	N:1	DATE:	2009/04/14	Huangmei	Jack Chen		B05-040		
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770				