
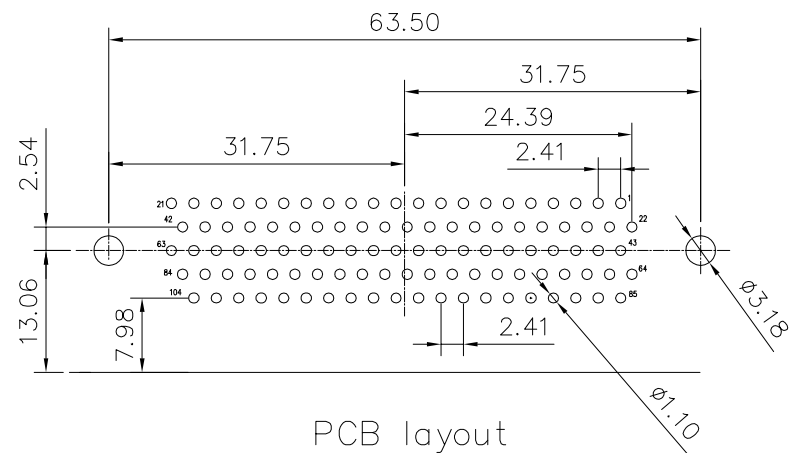

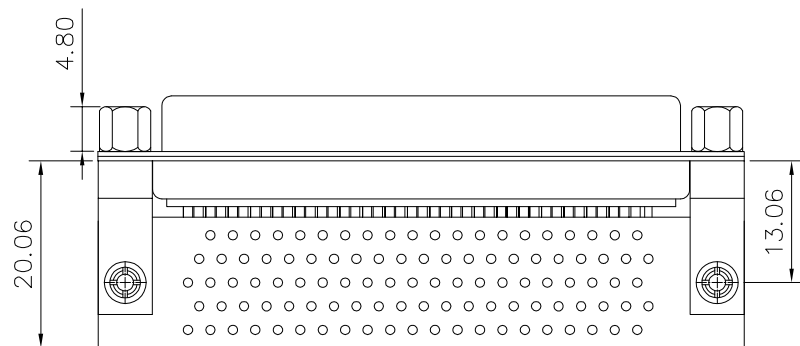


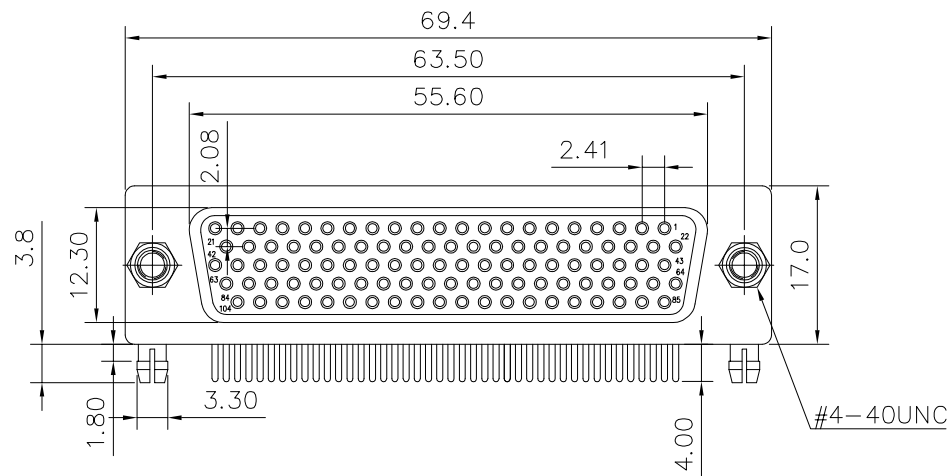

Current rating: 5 AMP.
Withstanding voltage: 1000V AC
Insulation resistance: 5000M Ω Min.
Temperature range: -45 $^{\circ}$ C to +125 $^{\circ}$ C
ROHS compliant

7	Riveted insert	Brass	Plating: Ni
6	Board lock	Brass	Plating: Sn
5	Nut	Steel	Plating: Ni
4	Housing	PBT+30%GF	Color: black
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Brass	Terminal finish: full gold 2u"
Item	Desc.	Material	Remark

△	2020/10/11	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x. ±0.60	
CRITICAL	MAJOR	.x ±0.40	
▽:	▽:	.xx ±0.25	
ZERO DEFECT	S.P.C		

NAME:		HD.D-SUB machined pin 104pin female right angle, 7.98mm, riveted board lock, nut 4.8mm				PART NO.		B04-1046114D-02	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
SCALE:	N:1	DATE:	2020/10/11	Huangmei	Jack Chen		B04-082		
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com				
					TEL:0769-85181660 85181770				