

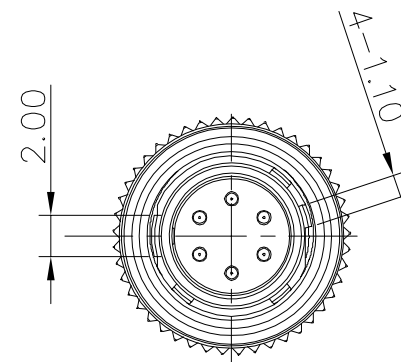


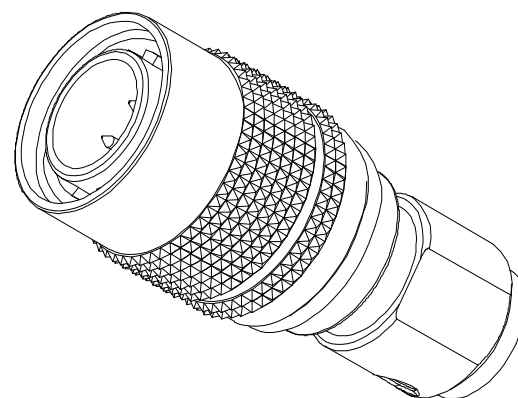

Current rating: 2A
Rated voltage: 100V
Contact resistance: 10mΩ Max.
Durability: 500 cycles
Temperature range: -25℃ to +85℃
ROHS compliant
Waterproof rating: IP67



7	Jacket	Rubber	Color:black
6	Tail cover	Copper	Plating: Ni
5	Terminal	Copper	Plating: Au
4	Spring	Spring steel	
3	Shell	Copper	Plating: Ni
2	Housing	PPS	Color: black
1	Hood	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance	NAME:	HR10A-7P-6P 6pin male solder assembly,plastic jacket				PART NO.	B10-01PT06SH-ZFD		
	2021/09/14	Add jacket drawings	Carl Hu	☐ : ☒ :	x. ±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
	2019/12/21	First edition release	Jack Chen	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2019/12/21	Yugong	Carl Hu		B10-063	
				☒ : ☒ :	.xx ±0.25	 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770								
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	 									
8	7	6	5	4	3	2		1						