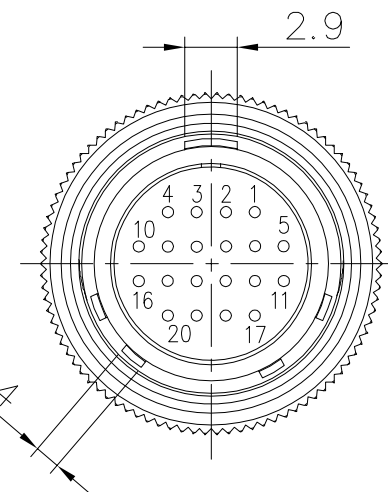
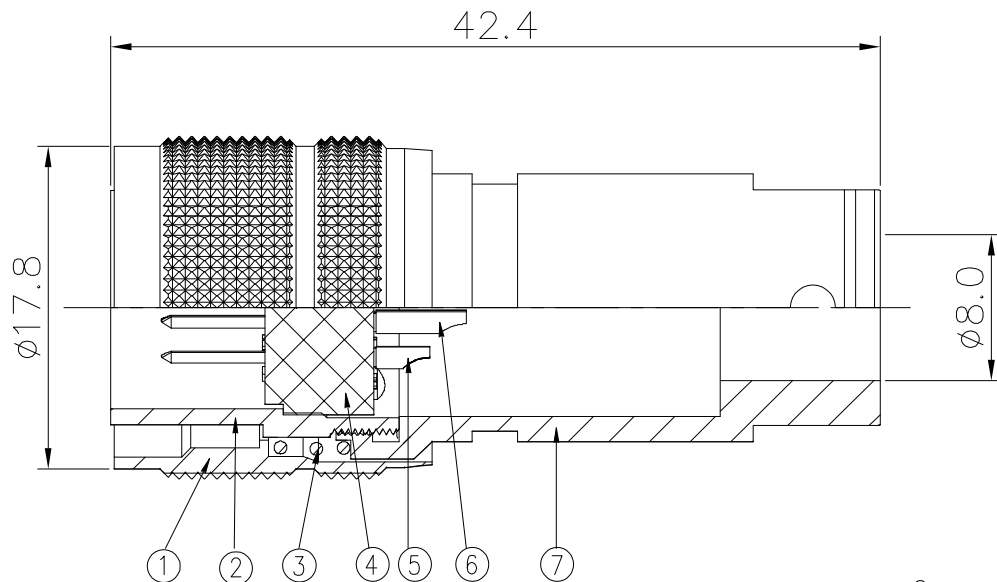
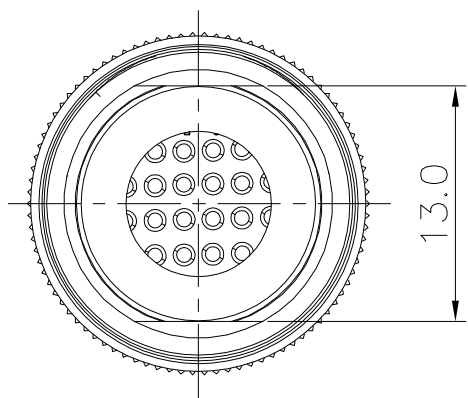


Current rating: 2A
Rated voltage: 100V
Contact resistance: 10mΩ Max.
Durability: 1000 cycles
Temperature range: -25℃ to +85℃
ROHS compliant
Waterproof rating: IP67

8	Plastic sleeve	Rubber	Color:black
7	Cable clip	Copper alloy	Plating:Ni
6	Terminal	Copper alloy	Plating:Au
5	Terminal	Copper alloy	Plating:Au
4	Housing	PPS	Color:black
3	Spring	Spring steel	
2	Shell	Zinc alloy	Plating:Ni
1	Hood	Copper alloy	Plating:Ni
Item	Desc.	Material	Remark

	2024/07/29	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
		x.	±0.60
		.x	±0.40
		.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		HR10A-13P-20P male solder assembly type			PART NO.	B10-03PT20SH-ZFD	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2024/07/29	Yugong	Carl Hu		B10-193
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com		
					TEL:0769-85181660 85181770		