


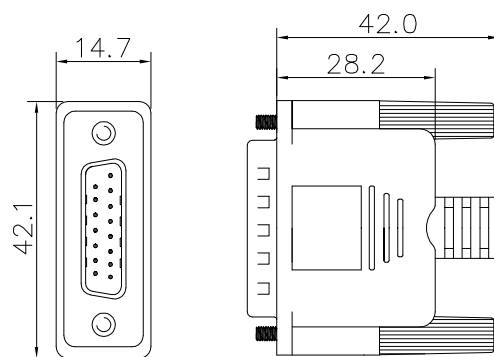

6	Screw	Q24 screw,black,#4-40	4pcs
5	Over mold	PVC 45P,black	NA
4	Inside mold	PE	NA
3	Connector	D-SUB 15pin male solder,housing color:black	1pcs
2	Connector	D-SUB 15pin male solder,housing color:black	1pcs
1	Cable	UL20276 7P*24AWG+1C*24AWG+AB,PVC jacket, black,OD: 6.5mm	NA
Item	Part name	Description	Qty

Notes:

- 1.Electrical test:100% open,short&miss wire test.
- 2.Conductor resistance:5Ω max.
- 3.Insulator resistance: 1MΩ min, DC 300V 0.01sec.
- 4.ROHS compliant
- 5.Part number description: A05—01511XXX—03, XXX: 001=length: 10cm

				QUALITY SYMBOLS	Tolerance		NAME:		D-SUB 15pin male to male cable, molded type				PART NO.		A05-01511XXX-03	
	2024/04/28	Added dimensions	Carl Hu	☐ : ☒ : CRITICAL MAJOR	Length(mm)	Tolerance(mm)	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
		300~2000	±50													
	2023/10/16	First edition release	Jack Chen	☒ : ☒ : ZERO DEFECT S.P.C	2001~5000	±100	SCALE:	NONE	DATE:	2023/10/16	Huangmei	Carl Hu		A05-028		
		5001~	±150													
SIDE	DATE	DESCRIPTION	APPROVER		 		lineconn 东莞市林诚塑胶电子有限公司								http://www.lineconn.com	
8		7		6		5		4		3		2		1		