
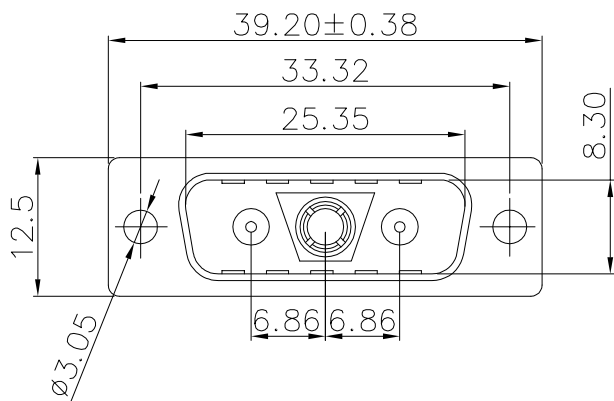


10A,20A,30A

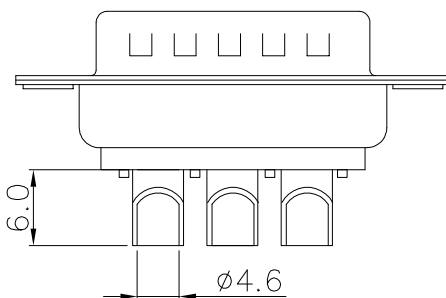

40A

Current rating:10/20/30/40 AMP.
Contact resistance:2.7 milliohms max.
Withstanding voltage:1000V AC
Insulation resistance:5000MΩ Min.
Temperature range:−55℃ to +125℃
ROHS compliant
Part number:

B09−3V33X1X0−X2

Housing color:_____

1: Black

3: Green

5: White

Terminal plated:_____

4: Au 2u”

5: Au 1u”

Current rating:_____

A: 10A,Dim.A Ø1.7

B: 20A,Dim.A Ø2.8

C: 30A,Dim.A Ø3.2

D: 40A,Dim.A Ø4.6

4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

△ 2025/12/18 Change dimensions and tolerances Jack Chen

△ 2022/04/12 Added 40A drawings Jack Chen

△ 2021/10/29 First edition release Jack Chen

SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS

□: □: MAJOR

CRITICAL MAJOR

▽: ▽: S.P.C


ZERO DEFECT S.P.C

Tolerance

x. ±0.60

.x ±0.40

.xx ±0.25



NAME:

3V3 male solder,cup 5.5mm

REV:

C

SCALE:

N:1

UNIT:

mm

DATE:

2021/10/29

DRW BY

John Liao

Lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770

PART NO.

B09−3V33X1X0−X2




CHK BY

Jack Chen


APP BY

DRAWING NO.

B09−020

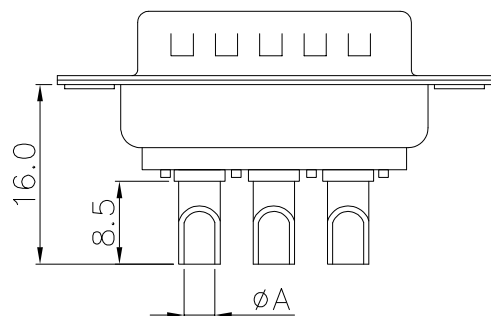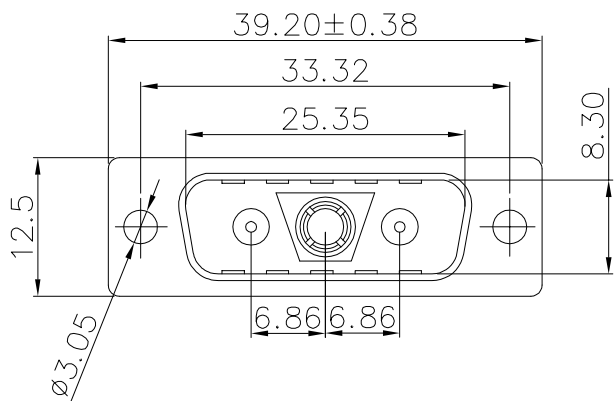

10A,20A,30A

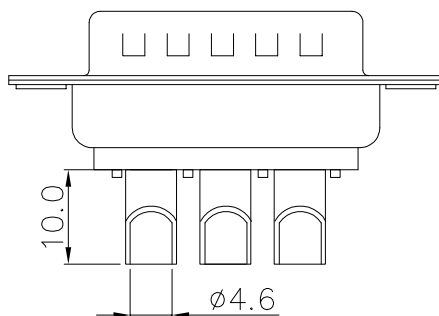

40A

Current rating:10/20/30/40 AMP.
Contact resistance:2.7 milliohms max.
Withstanding voltage:1000V AC
Insulation resistance:5000MΩ Min.
Temperature range:−55℃ to +125℃
ROHS compliant
Part number:

B09−3V33X1X0−X1

Housing color: _____
1: Black
3: Green
5: White
Terminal plated: _____
4: Au 2u"
5: Au 1u"
Current rating: _____
A: 10A,Dim.A Ø1.7
B: 20A,Dim.A Ø2.8
C: 30A,Dim.A Ø3.2
D: 40A,Dim.A Ø4.6

4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

△	2025/12/18	Change dimensions and tolerances	Jack Chen
△	2022/04/12	Added 40A drawings	Jack Chen
△	2012/09/26	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	3V3 male solder,cup 8.5mm				PART NO.	B09-3V33X1X0-X1	
REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2012/09/26	John Liao	Jack Chen		B09-003
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com		
					TEL:0769-85181660 85181770		